



**Component Systems** for Lighting Applications



**For Discharge Lamps**

Ballasts, Control Gear Units, Ignitors, Power Switches, Capacitors and Lampholders

**For Fluorescent Lamps**

Ballasts, Capacitors, Lampholders, Starter Lampholders, Terminal Blocks and Accessories

**For Incandescent Lamps**

Transformers and Lampholders

**For Emergency Lighting**

Emergency lighting modules, Rechargeable Batteries and Supports

<b>1</b>	<b>Vossloh-Schwabe Projects</b>	<b>4-5</b>	<b>3</b>	<b>Electronic Ballasts for TC and T Lamps</b>	<b>132-164</b>
<b>2</b>	<b>Ballasts for Discharge Lamps</b>	<b>6-47</b>		For compact fluorescent lamps	134-150
	Electronic ballasts, accessories	8-18		ELXs - Warm start	134
	Dimmable electronic ballasts	16-17		ELXc - Warm start - linear casing shape	135
	Luminaire protection device SP 230/10K	18		ELXd - Dimmable - linear casing shape	136-137
	Control gear units for HS and HI lamps	19-21		ELXc - Warm start - compact casing shape	138-146
	Electromagnetic ballasts	22-47		ECO EffectLine	144
	for HS and HI lamps	22-37		ELXd - Dimmable - compact casing shape	147-150
	for HM and HI lamps	38-41		For tubular fluorescent lamps	151-163
	for power reduction	42-47		ELXs - Warm start	151
				ELXc - Warm start - linear casing shape	152-159
				EffectLine and EffectLine II	156-157
				New T5 EffectLine	158
				ECO EffectLine	159
				ELXd - Dimmable - linear casing shape	160-163
				Accessories for dimmable electronic built-in ballasts	164
<b>2</b>	<b>Ignitors and Accessories for Discharge Lamps</b>	<b>48-69</b>	<b>3</b>	<b>Electromagnetic ballasts for TC and T Lamps</b>	<b>166-177</b>
	Electronic superimposed ignitors	50-58		For compact fluorescent lamps	168-172
	Pulse ignitors	59-60		Standard ballasts	168-171
	Instant restrike ignitors	61-62		Ballasts 120 V, 60 Hz	172
	Electronic power switches	63		For tubular fluorescent lamps	173-176
	Electronic superimposed ignitors with power switch	64		Standard ballasts	173-175
	Switch units for electronic operating devices with 1-10 V interface	65		Ballasts 120 V, 60 Hz	176
	Start-up switches	66-67			
	Electronic discharge units	68			
<b>2</b>	<b>Lampholders for Discharge Lamps</b>	<b>70-88</b>	<b>3</b>	<b>Lampholders and Accessories for TC Lamps</b>	<b>179-199</b>
	E27 lampholders	72-74		G24, GX24 lampholders	180-187
	E40 lampholders	75-76		2G7 lampholders	187-188
	G8.5 lampholders	77		G23 lampholders	188-191
	GX8.5 lampholders, accessories	77		GR8, GR10q, GRY10q-3, GRZ10d, GRZ10t lampholders	191-192
	GU6.5 lampholders	78		2G10 lampholders	192
	PGJ5 lampholders	79		2G11/2GX11 lampholders	193-194
	GX10 lampholders	80		Accessories	195-197
	GY9.5 lampholders	81		GX53-1 lampholders, accessories	198-199
	G12, GX12-1, PG12-1, PG12-2 lampholders	81-82			
	RX7s lampholders	83-86	<b>3</b>	<b>Lampholders and Accessories for T Lamps</b>	<b>200-231</b>
	Fc2 lampholders	86-87		G5 lampholders	202-209
	K12x30s lampholders	88		G5 lampholders, accessories	202-206
	K12s-7 support	88		G5 twin lampholder	207
				G5 lampholders, degree of protection IP54/IP65/IP67	207-208
<b>2</b>	<b>Technical Details for Discharge Lamps</b>	<b>89-131</b>		2GX13 lampholders, accessories	209
				G13 lampholders	210-229
				G13 push-through lampholders	210-212
				G13 push-fit lampholders	213-215
				G13 push-fit twin lampholders, accessories	216-217
				G13 built-in lampholders	217-221
				G13 surface-mounted lampholders	221-222
				Accessories for T8 and T12 lamps	222-224
				G13 lampholders, degree of protection IP54/IP65/IP67, accessories	225-229
				G10q lampholders, accessories	230
				W4.3x8.5d lampholders	231

**3 Starter Holders and Terminal Blocks, Accessories 232–242**

Starter holders, accessories	234–237
Terminal blocks, accessories	238–242
Built-in rocker switches	242

**3 Technical Details for Fluorescent Lamps 243–271**

**4 Parallel Capacitors 272–287**

Parallel capacitors	274–277
Technical details for parallel capacitors	278–287

**5 Transformers for Low-voltage Halogen Incandescent Lamps 288–298**

Independent electronic converters	290–293
Electronic built-in converters	294
Potentiometer and dimmers	295
Electromagnetic safety transformers	296–298

**5 Lampholders for Low-voltage Halogen Incandescent Lamps 300–311**

G4, GZ4, G5.3, GX5.3, G6.35, GY6.35 lampholders, accessories	302–303
G4 lampholders, GZ4 lamp connectors	304–306
Lampholders with separate mounting spring for GU4 lamps	306–307
GX5.3 lamp connectors	307–308
GU5.3 lampholders	308
Lampholders with separate mounting spring for GU5.3 lamps	309–310
G6.35, GY6.35 lampholders, GZ6.35 lamp connectors	310
G53 lamp connectors	311
B15d, BA15d lampholders	311

**5 Lampholders for Mains Voltage Halogen Incandescent Lamps 311–321**

B15d, BA15d lampholders	311
G9 lampholders, accessories	312–314
GU10, GZ10 lampholders, accessories	314–316
R7s thermoplastic lampholders	316
R7s ceramic lampholders	317–319
R7s metal lampholders	319
Connection boxes	320
Connectors	321

**5 Lampholders for General-service Incandescent and Retrofit Lamps 322–359**

E14 lampholders	324–333
E14 thermoplastic lampholders, one-piece and cover caps	324–328
E14 table lamp set	329
E14 thermoplastic lampholders, three-piece	329–331
E14 metal lampholders, three-piece	332
E14 thermoplastic rocker switch lampholders	333
E14 lampholder for emergency lighting	333
E27 lampholders	334–350
E27 thermoplastic lampholders, one-piece and cover caps	334–338
E27 table lamp set	339
E27 renovation kit lampholders	339
E27 thermoplastic lampholders, three-piece	340–342
E27 porcelain lampholders	343–344
E27 metal lampholders, three-piece	345
E27 thermoplastic pull-switch lampholders	346–347
E27 metal pull-switch lampholders	347–348
E27 thermoplastic rocker switch lampholders	348–349
E27 thermoplastic rotary switch lampholders	349
E27 festoon lampholders	350
B22d lampholders, accessories	351–352
Accessories for E14, E27 and B22d lampholders	352–358
E40 porcelain lampholders	358–359

**5 Technical Details for Incandescent Lamps 360–373**

**6 Emergency Lighting Modules for TC and T Lamps 374–385**

Emergency lighting modules with self-diagnosis function	376–377
Technical details for emergency lighting modules	378–385

**7 Components for UL Market 386–393**

For discharge lamps	388–389
For fluorescent lamps	389–392

**8 General Technical Details 394–401**

**9 Glossary 402–404**

**10 Table of Reference Numbers and Approval Marks 405–416**



# LIGHT TECHNOLOGY PRODUCTS



Vossloh-Schwabe is not merely a manufacturer of top-quality components for the lighting industry, but above all a competent and innovative partner when it comes to providing the growing lighting market with cost-effective all-round solutions.

Featuring a future-proof component structure that already now satisfies both the requirements of energy-efficient lighting and European standards, VS' unique product range includes magnetic and electronic ballasts, state-of-the-art control systems (LiCS), LED lighting systems and matching operating devices.

Employing in excess of 1,000 people in more than 20 countries, Vossloh-Schwabe is represented all over the world. As a subsidiary of the Japanese Panasonic Group, VS can draw on extensive resources for R&D as well as for international expansion activities. A highly motivated workforce, comprehensive market knowledge, profound industry expertise as well as eco-awareness and environmental responsibility show Vossloh-Schwabe to be a reliable partner for the provision of optimum and cost-effective lighting solutions.

Vossloh-Schwabe's dedication to delivering superior quality is reflected in its ISO 9001 certification.

Vossloh-Schwabe is ready to embark on a collaborative journey into an economically illuminated future.

LED components are just as much a part of our product range as light control systems. Our extensive range of powerful LED modules, LED drivers, LiCS controllers and sensors is presented in our separate **Innovative Systems** catalogue.

We'll be happy to help you dimension your lighting project. Contact us.







**PUMA Headquarters**



**Porsche Museum**

1

2

3

4

5

6

7

8

9

10

### **PUMA Headquarters, Herzogenaurach**

As the secret "capital of sport", the little German town of Herzogenaurach is home to the headquarters of the sport lifestyle company PUMA. Covering a total surface area of 50,000 square metres, the complex is made up of three buildings that are positioned so as to create a large central square, the PUMA Plaza.

The main aim of the lighting concept developed for the new PUMA corporate headquarters was to deliver optimum quality of light, enable maximum flexibility in using the available space and yield the greatest possible energy savings. No less than 985 electronic DALI ballasts and 4,650 standard electronic ballasts made by Vossloh-Schwabe went into implementing the lighting system.

The inner courtyard features additional red and white effect lighting in the form of ground-level linear markings created using LEDs made by Vossloh-Schwabe. These LEDs enable digital lighting sequences to flow over the square. To complement the clear-cut, rectilinear forms that characterise the entire building complex, a number of slender light columns, made of square aluminium sections, were installed to round off the courtyard's stylish appearance.

Photos: Markus Bollen


### **Porsche Museum, Stuttgart**

The name "Porsche" both stands for a long tradition of outstanding quality and the excitement of high-octane driving. The Porsche Museum in Stuttgart constitutes a fitting presentation venue that does the brand image every justice. The architectural flagship thus serves to make the "Porsche experience" available to everyone.

The lighting installed in the Porsche Museum forms a crucial element of the exhibition space created for around 80 vehicles. It was important to ensure every detail of these high-end cars was clearly visible. In this regard, direct and reflecting lighting had to be reduced to an absolute minimum so as to neither irritate visitors, nor detract from the brilliant gloss of the bodywork.

This forms another instance in which Vossloh-Schwabe products have helped to add to the enjoyment of each and every visitor. Built-in electronic ballasts and electronic DALI safety converters ensure flicker-free, efficient light.

## ELECTRONIC AND ELECTROMAGNETIC

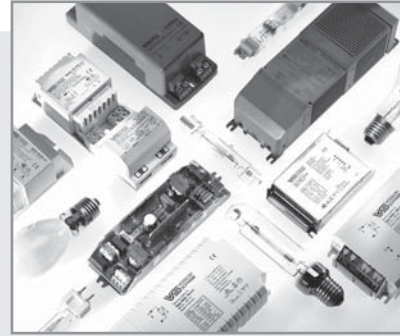

## ELECTRONIC AND ELECTRO-MAGNETIC OPERATING DEVICES

**For high-pressure sodium lamps (HS), metal halide lamps (HI) and mercury vapour lamps (HM)**

### **Electronic ballasts**

Modern discharge lamps operate very efficiently in combination with electronic ballasts. The numerous advantages of using electronic ballasts to operate high-pressure discharge lamps are listed in more detail on the product pages.

With the help of temperature and service-life tests, VS electronic ballasts guarantee a high degree of reliability. The quality of the electronic ballasts is ensured by continuous in-circuit tests and function tests like burn-in tests.

### **Magnetic ballasts**

The electrical specifications of VS' range of ballasts comply with lamp-specific requirements. Vossloh-Schwabe attaches great importance to ensuring the impedance value of electromagnetic ballasts is kept within particularly narrow tolerances. This advantage, which is achieved by individual adjustment of the air gap during the automated production and testing process of every ballast, decisively contributes to optimising light output, light colour and service life of discharge lamps.

The range includes ballasts with variable voltage tapping points and varying degrees of inherent heating as well as encapsulated devices.



**For high-pressure sodium lamps (HS), metal halide lamps (HI) and mercury vapour lamps (HM)****Electronic ballasts, accessories**

Dimmable electronic ballasts

Luminaire protection device SP 230/10K

**8-18**

16-17

18

**Control gear units for HS and HI lamps****19-21****Electromagnetic ballasts**

For HS and HI lamps

For HM and HI lamps

For power reduction

**22-47**

22-37

38-41

42-47

**Technical details for discharge lamps**

General technical details

Glossary

**89-131**

394-401

402-404

1

2

3

4

5

6

7

8


9

10




## Compact Electronic Ballasts for HI Lamps 20 and 35 W

Shape: K35

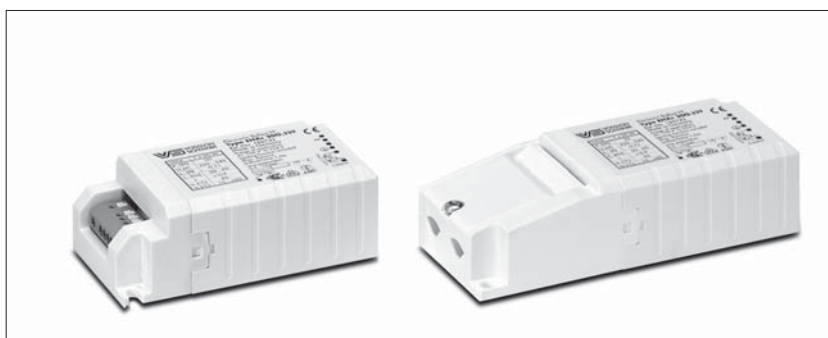


Casing: heat-resistant polyamide, encapsulated with polyurethane (EHXc 35G.327 B and EHXc 35G.327 I)  
 For ceramic discharge tube lamps (C-HI)  
 Power factor: > 0.9  
 Operation frequency: 135 Hz  
 Push-in terminals: 0.5-1.5 mm<sup>2</sup>  
 Constant power consumption  
 Protection against "no load" operation  
 For luminaires of protection class I and II  
 Degree of protection: IP20  
 Permissible load capacity: 120 pF  
 RFI-suppressed  
 Fixing brackets for screws M4 for base mounting  
 No flickering of defective lamps

K35



K35 with cord grip

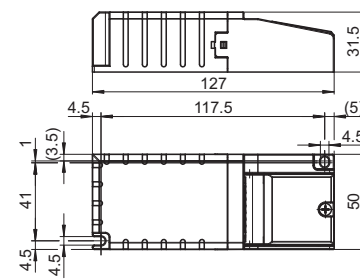



Lamp				Electronic ballast									System
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V -10%+6%	Mains current A	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Ignition voltage kV	Weight g	Output W
<b>Electronic built-in ballasts</b>													
20	HI	GU6.5, G8.5, GX8.5, GX10, G12	1 x 20	EHXc 20.329 B	<b>188991</b>	220-240	0.11	A2	-15 to 60	max. 75	2-4	130	23
35	HI	GU6.5, G8.5, GX8.5, GX10, G12	1 x 39	EHXc 35G.327 B	<b>188993</b>	220-240	0.2	A2	-15 to 45	max. 80	2-4	180	43.5
<b>Independent electronic ballasts with cord grip</b>													
20	HI	GU6.5, G8.5, GX8.5, GX10, G12	1 x 20	EHXc 20.329 I	<b>188992</b>	220-240	0.11	A2	-15 to 60	max. 75	2-4	145	23
35	HI	GU6.5, G8.5, GX8.5, GX10, G12	1 x 39	EHXc 35G.327 I	<b>188994</b>	220-240	0.2	A2	-15 to 45	max. 80	2-4	195	43.5

Circuit diagrams see page 96


## Electronic Ballasts for HI Lamps 35, 50 and 70 W

Shape: M3/K34


Casing: aluminium (M3),  
heat-resistant polycarbonate (K34)  
For ceramic discharge tube lamps (C-HI)  
Power factor:  $\geq 0.95$   
Ignition voltage: max. 5 kV  
Operation frequency: 173 Hz  
Push-in terminals with lever opener: 0.75-2.5 mm<sup>2</sup>  
Total harmonic distortion:  $< 10\%$   
Temperature protection  
Constant power consumption  
Protection against "no load" operation  
For luminaires of protection class I (metal casing)  
For luminaires of protection class I and II (plastic casing)  
Degree of protection: IP20  
Permissible load capacity: 20-120 pF  
RFI-suppressed  
Fixing brackets for screws M4  
for base mounting  
No flickering of defective lamps

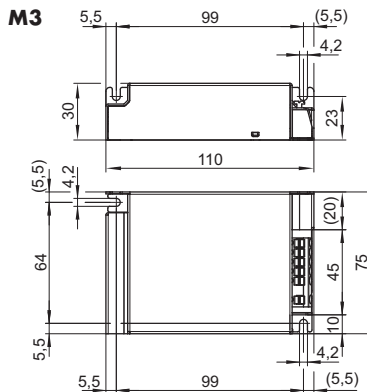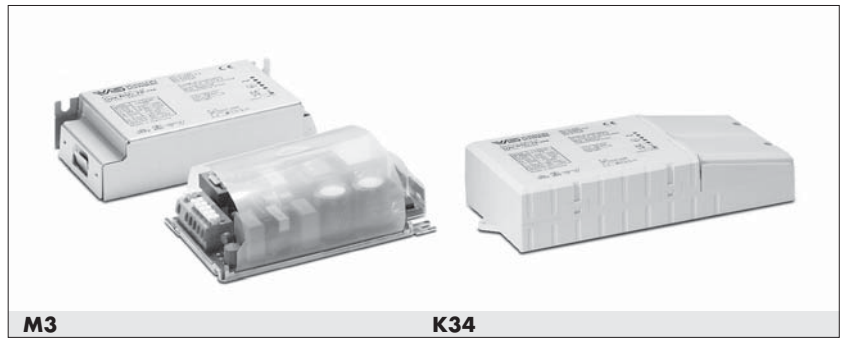


M3 built-in PCB



K34 with cord grip

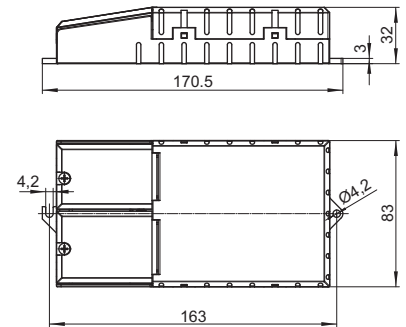

t<sub>c</sub> point definition



Lamp				Electronic ballast								System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V $\pm 10\%$	Mains current A	Energy efficiency	Ambient temperature t <sub>a</sub> [°C]	Casing temperature t <sub>c</sub> [°C]	Weight g	Output W	
<b>Electronic built-in ballast (with cap)</b>													
35	HI	GU6.5, G8.5, GU8.5, GX8.5, G12, E27	1 x 39	EHXc 35.325	<b>183033</b>	220-240	0.20-0.18	A2	-20 to 65	max. 80	220	43	
50	HI	G8.5, G12	1 x 50	EHXc 50.358	<b>183028</b>	220-240	0.26-0.24	A2	-20 to 60	max. 80	220	55	
70	HI	G8.5, GU8.5, GX8.5, G12, PG12-2, E27, RX7s	1 x 73	EHXc 70.326	<b>183036</b>	220-240	0.36-0.34	A2	-20 to 55	max. 80	220	80	
<b>Built-in PCB – Electronic built-in ballasts (without cap)</b>													
35	HI	GU6.5, G8.5, GU8.5, GX8.5, G12, E27	1 x 39	EHXc 35.325	<b>183034</b>	220-240	0.20-0.18	A2	-20 to 65	max. 80	180	43	
50	HI	G8.5, G12	1 x 50	EHXc 50.358	<b>183030</b>	220-240	0.26-0.24	A2	-20 to 60	max. 80	180	55	
70	HI	G8.5, GU8.5, GX8.5, G12, PG12-2, E27, RX7s	1 x 73	EHXc 70.326	<b>183037</b>	220-240	0.36-0.34	A2	-20 to 55	max. 80	180	80	
<b>Independent electronic ballasts with cord grip</b>													
35	HI	GU6.5, G8.5, GU8.5, GX8.5, G12, E27	1 x 39	EHXc 35.325	<b>183035</b>	220-240	0.20-0.18	A2	-20 to 65	max. 75	260	43	
50	HI	G8.5, G12	1 x 50	EHXc 50.358	<b>183029</b>	220-240	0.26-0.24	A2	-20 to 60	max. 70	260	55	
70	HI	G8.5, GU8.5, GX8.5, G12, PG12-2, E27, RX7s	1 x 73	EHXc 70.326	<b>183038</b>	220-240	0.36-0.34	A2	-20 to 55	max. 75	260	80	

Circuit diagrams see page 96

## Electronic Ballasts for HI Lamps 35 and 70 W

Shape: **M3.1 EffectLine**

Casing: metal

For ceramic discharge tube lamps (C-HI)

Power factor:  $\geq 0.95$

Ignition voltage: max. 5 kV

Operation frequency: 173 Hz

Push-in terminals with lever opener: 0.5-1.5 mm<sup>2</sup>

Total harmonic distortion: < 10%

Temperature protection

Constant power consumption

Protection against "no load" operation

For luminaires of protection class I

Degree of protection: IP20


Permissible load capacity: 20-120 pF

RFI-suppressed


Life-time at  $t_{c \max}$  = 30,000 hrs

Fixing brackets for screws M4

for base mounting

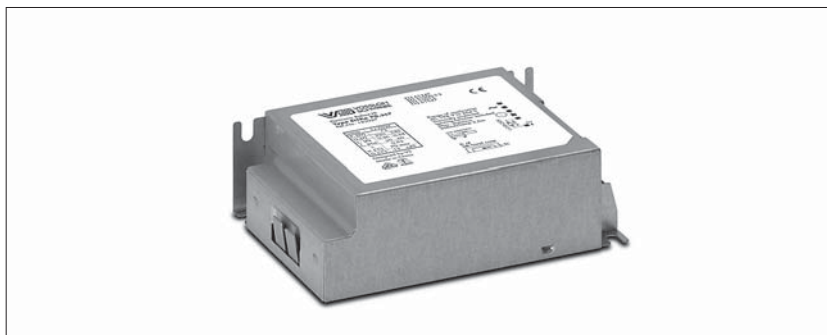

**M3.1 EffectLine**

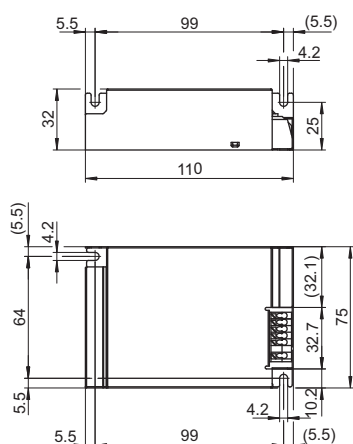

Lamp				Electronic ballast								System
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V $\pm 10\%$	Mains current A	Energy efficiency	Ambient temperature $t_a$ (°C)	Casing temperature $t_c$ (°C)	Weight g	Output W
35	HI	GU6.5, G8.5, GU8.5, GX8.5, G12, E27	1 x 39	EHXe 35.356	<b>183026</b>	220-240	0.20-0.18	A2	-15 to 65	max. 80	220	43
70	HI	G8.5, GU8.5, GX8.5, G12, PG12-2, E27, RX7s	1 x 73	EHXe 70.357	<b>183027</b>	220-240	0.36-0.34	A2	-15 to 50	max. 80	220	80

Circuit diagrams see page 96



# Independent Electronic Ballasts for HI Lamps 20-70 W

Shape: K36

Casing: heat-resistant polycarbonate  
 Easy connection by plug-in connector  
     primary: GST18 1-coded/black with locking  
     secondary: ST18-3BF lockable  
 For ceramic discharge tube lamps (C-HI)  
 Power factor: 0.95  
 Ignition voltage: max. 5 kV  
 Operation frequency: 173 Hz  
 Total harmonic distortion: < 10%  
 Temperature protection  
 Constant power consumption  
 Protection against "no load" operation  
 For luminaires of protection class I and II  
 Degree of protection: IP20  
 Permissible load capacity: 20-120 pF  
 RFI-suppressed  
 Fixing brackets for screws M4 for base mounting



### Additional technical features



The electronic ballast is protected against transient mains peaks up to 2.5 kV.



Overheating protection with VS thermal cut-out system with automatic reset which evaluates the temperature of the ballast.




At lamp operation voltage of > 140 V the electronic ballast will switch itself off.



Inrush current limiter

K36

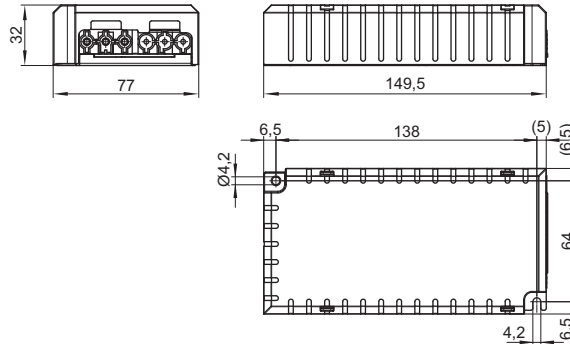

Lamp				Electronic ballast								System
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V ±10%	Mains current A	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Weight g	Output W
new 20	HI	G8.5, G12	1 x 20	EHXc 20.370	<b>183097</b>	220-240	0.12-0.10	A2	-20 to 55	max. 75	250	24
new 35	HI	GU6.5, G8.5, GU8.5, GX8.5, G12, E27	1 x 39	EHXc 35.371	<b>183098</b>	220-240	0.20-0.18	A2	-20 to 55	max. 75	250	43
new 50	HI	G8.5, G12	1 x 50	EHXc 50.372	<b>183032</b>	220-240	0.26-0.24	A2	-20 to 55	max. 75	250	55
new 70	HI	G8.5, GU8.5, GX8.5, G12, PG12-2, E27, RX7s	1 x 73	EHXc 70.373	<b>183099</b>	220-240	0.36-0.34	A2	-20 to 50	max. 75	250	80

Circuit diagrams see page 96

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10


## Electronic Ballasts for HI Lamps 2 x 35 and 2 x 70 W

### Shape: K32


Casing: heat-resistant polycarbonate  
 For ceramic discharge tube lamps (C-HI)  
 Power factor: 0.98  
 Ignition voltage: max. 5 kV  
 Operation frequency: 176 Hz  
 Push-in terminals with lever opener: 0.75-2.5 mm<sup>2</sup>  
 Total harmonic distortion: < 10%  
 Temperature protection: a lamp is switched off  
 in the event of overheating  
 Constant power consumption  
 Protection against "no load" operation  
 For luminaires of protection class I and II  
 Degree of protection: IP20  
 Permissible load capacity: 20-100 pF  
 RFI-suppressed  
 Fixing brackets for screws M4  
 for base mounting  
 Separate ignition channels enable  
 independent lamp operation



**K32**

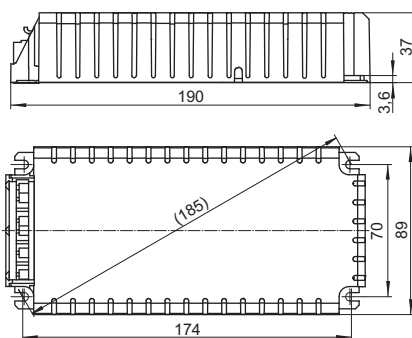

**K32 with cord grip**

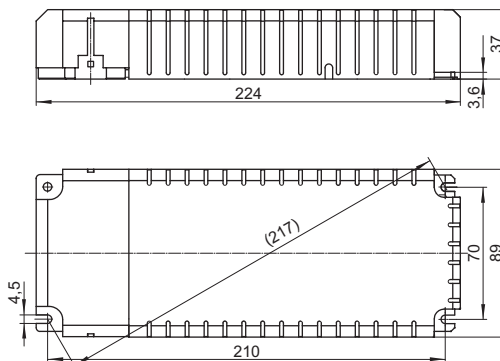

Lamp				Electronic ballast								System
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V -10%+6%	Mains current A	Energy- efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Weight g	Output W
<b>Electronic built-in ballasts</b>												
2x35	HI	GU6.5, G8.5, GU8.5, GX8.5, G12, E27	2 x 39	EHXc 235.316	<b>188223</b>	220-240	0.4-0.36	A2	-25 to 50	max. 80	405	86
2x70	HI	G8.5, GU8.5, GX8.5, G12, PG12-2, E27, RX7s	2 x 73	EHXc 270.317	<b>188224</b>	220-240	0.74-0.68	A2	-25 to 45	max. 80	440	160
<b>Independent electronic ballasts with cord grip</b>												
2x35	HI	GU6.5, G8.5, GU8.5, GX8.5, G12, E27	2 x 39	EHXc 235.316	<b>188455</b>	220-240	0.4-0.36	A2	-25 to 50	max. 80	455	86
2x70	HI	G8.5, GU8.5, GX8.5, G12, PG12-2, E27, RX7s	2 x 73	EHXc 270.317	<b>188456</b>	220-240	0.74-0.68	A2	-25 to 45	max. 80	490	160

Circuit diagrams see page 190

## Cord Grip for Electronic Built-in Ballasts

For shape K31 and K32

By using the cord grip electronic built-in ballasts for metal halide lamps become independent ballasts.

Material: heat-resistant polycarbonate

For use with electronic built-in ballasts with casing K31 and K32

For mains leads:

HO3VV-F 3X0.75 or NYM 3X1.5 mm<sup>2</sup>

For lamp leads: SIHY-Cu 3X1 mm<sup>2</sup>



or SIHSI-Cu 3X1 mm<sup>2</sup>

Weight: 50 g

Unit: 20 pcs.

By turning the cable clamp by 180° the lead diameter can be reduced to 5 mm.

**Ref. No.: 188080**

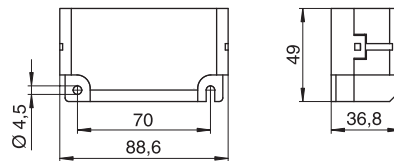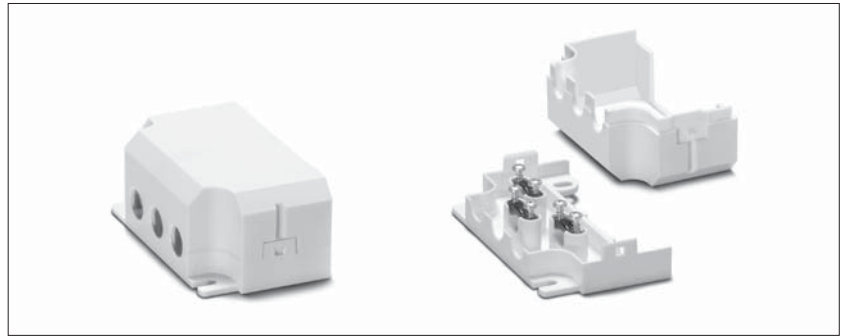

1

2

3

4

5

6

7

8

9






10



## Electronic Ballasts for HI Lamps 100 and 150 W

Shape: M36/K31/K38

Casing: aluminium (M36),  
heat-resistant polycarbonate (K31, K38)  
For ceramic discharge tube lamps (C-HI)  
Power factor: 0.98  
Ignition voltage: max. 5 kV  
Operation frequency: 170 Hz  
Push-in terminals with lever opener: 0.75-2.5 mm<sup>2</sup>  
Total harmonic distortion: < 10%  
Temperature protection  
Constant power consumption  
Protection against "no load" operation  
For luminaires of protection class I and II  
Degree of protection: IP20  
Permissible load capacity: 20-240 pF  
RFI-suppressed  
Fixing brackets for screws M4  
for base mounting

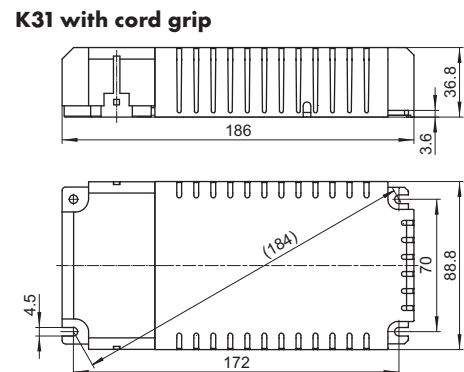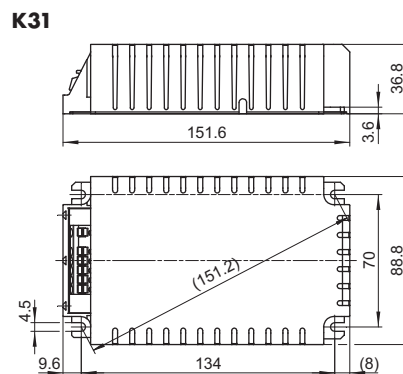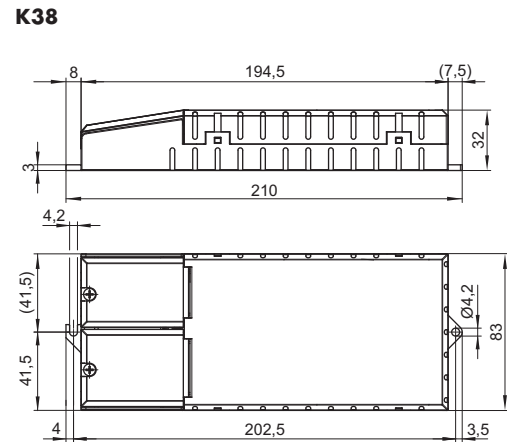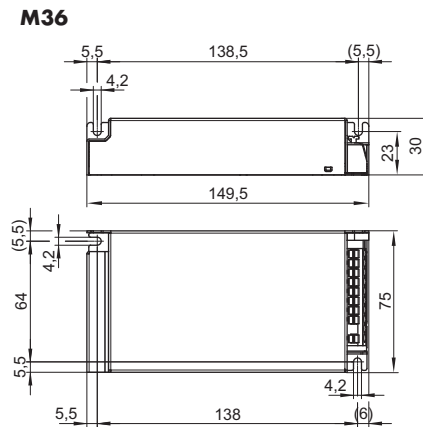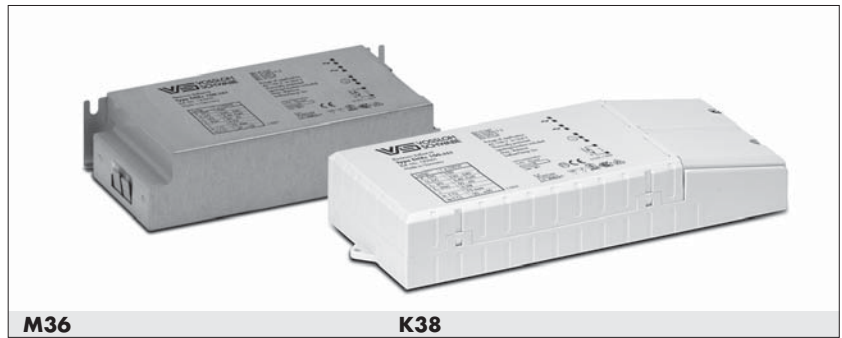

## Electronic Ballasts for HI Lamps 100 and 150 W

Shape: M36 and K31, K38

Lamp				Electronic ballast									System
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V ±10%	Mains current A	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Weight g	Output W
<b>Electronic built-in ballasts</b>													
100	HI	G12, E40	1 x 100	EHXc 100.353	<b>183000</b>	220-240	0.49-0.45	A2	-20 to 50	max. 75	M36	306	108
150	HI	G12, PGX12-2, E27, E40, RX7s	1 x 147	EHXc 150G.334	<b>183046</b>	220-240	0.73-0.67	A2	-20 to 45	max. 85	K31	540	160
<b>Independent electronic ballasts with cord grip</b>													
100	HI	G12, E40	1 x 100	EHXc 100.353	<b>183001</b>	220-240	0.49-0.45	A2	-20 to 45	max. 75	K38	350	108
150	HI	G12, PGX12-2, E27, E40, RX7s	1 x 147	EHXc 150G.334	<b>183047</b>	220-240	0.73-0.67	A2	-20 to 45	max. 85	K31	582	160

Circuit diagrams see page 96

1

2

3

4

5

6

7


8

9

10

## Dimmable Electronic Built-in Ballasts for HI and HS Lamps 50–250 W

Shape: K40/K41 and M42

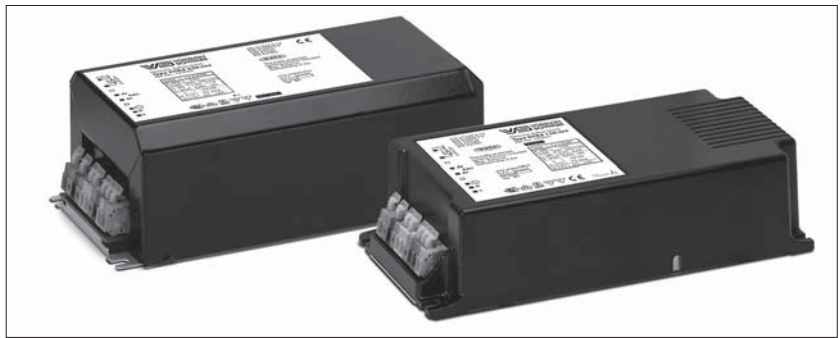


For dimmable metal halide lamps and dimmable high pressure sodium lamps  
 Casing: aluminium (M42), heat-resistant polycarbonate (K40/K41)  
**Dimming range: acc. to lamp specification**  
 Dimming via digital microcontroller  
 Dimming interface: DALI or MidNight  
 For use with open or closed-loop control units  
 Suitable MidNight Controller 186240 (for installation in the distribution board) or 186241 (as a mobile controller) are available on request.  
 Power factor: 0.98  
 Ignition voltage: max. 4.5 kV  
 Operation frequency: 81 Hz  
 Push-in terminals with lever opener: 0,75–2,5 mm<sup>2</sup>


Total harmonic distortion: < 10%  
 Degree of protection: IP20  
 Permissible load capacity: 250 pF  
 Constant power consumption  
 Protection against "no load" operation  
 RFI-suppressed  
 Electromagnetic immunity category in acc. with IEC 61000-4-11: class B  
 Spectral power ratio (HF-Ripple): < 1.5% in acc. with IEC 61167  
 EOL shutdown at the end of the lamp's service life  
 Transient mains peak protection  
 The ballast outputs (to the lamp) are short-circuit-proof.  
 Max. lamp lead length: 2.5 m

Temperature monitoring  
 For luminaires of protection class I and II  
 Fixing brackets for screws M4 for base mounting  
 Compatible with IEC 62386 (DALI version for HID)

### K40/K41

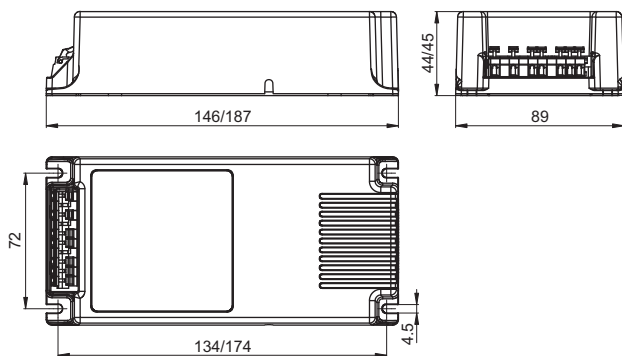

### M42

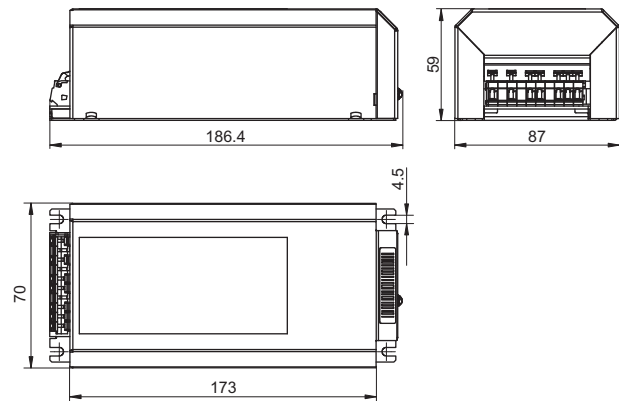


Lamp				Electronic ballast									System
Output W	Type	Base*	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V ±10%	Mains current A	Energy-efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Weight g	Output W
<b>DALI/MidNight (Dual) – Casing K40, K41 and M42</b>													
50	HI/HS	G8.5, G12, E27	1 x 50	EHXd 50.360	<b>183048</b>	220–240	0.27–0.22	A2	–25 to 80	max. 85	K40	380	55
70	HI/HS	G8.5, GU8.5, GX8.5, G12, PG12-2, E27, RX7s	1 x 73	EHXd 70.361	<b>183049</b>	220–240	0.37–0.31	A2	–25 to 75	max. 85	K40	380	80
100	HI/HS	G12, E40	1 x 100	EHXd 100.362	<b>183050</b>	220–240	0.50–0.43	A2	–25 to 65	max. 75	K41	520	107
150	HI/HS	G12, G22, PGX12-2, Fc2, E27, E40, RX7s	1 x 150	EHXd 150.363	<b>183051</b>	220–240	0.76–0.64	A2	–25 to 55	max. 80	K41	520	161
250	HI/HS	Fc2, E40, RX7s	1 x 250	EHXd 250.364	<b>183052</b>	220–240	1.25–1.07	A2	–25 to 45	max. 60	M42	930	267

Circuit diagrams see page 96

\* Please ensure that lamps are only dimmed if specified as "dimmable" by the manufacturer.

## Independent Dimmable Electronic Ballasts IP65 for HI and HS Lamps 50–250 W

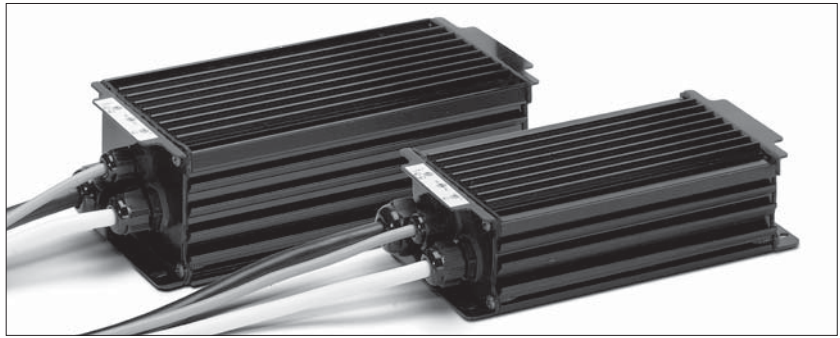

**Shape: M43/M44 and M45**

For dimmable metal halide lamps and dimmable high pressure sodium lamps

Casing: aluminium

**Dimming range: acc. to lamp specification**

Dimming via digital microcontroller

Dimming interface: DALI or MidNight

For use with open or closed-loop control units

Suitable MidNight Controller 186240 (for installation in the distribution board) or 186241 (as a mobile controller) are available on request.

Constant power consumption

Protection against "no load" operation

RFI-suppressed

Electromagnetic immunity category

in acc. with IEC 61000-4-11: class B

Spectral power ratio (HF-Ripple): < 1.5%

in acc. with IEC 61167

Power factor: 0.98

Ignition voltage: max. 4.5 kV

Operation frequency: 81 Hz

Leads: Mains: H05W-F 3X1.5 mm<sup>2</sup>

DALI: YSLY-OZ 2X0.75 mm<sup>2</sup>

Lamp: X-SHF 2X1.5 mm<sup>2</sup>

Lead lengths: 60 cm

Total harmonic distortion: < 10%

**Degree of protection: IP65**

Permissible load capacity: 250 pF

EOL shutdown at the end of the lamp's service life

Transient mains peak protection

The ballast outputs (to the lamp) are short-circuit-proof.


Temperature monitoring

For luminaires of protection class I and II


Fixing brackets for screws M4 for base mounting

Compatible with IEC 62386 (DALI version for HID)

**M43/M44**

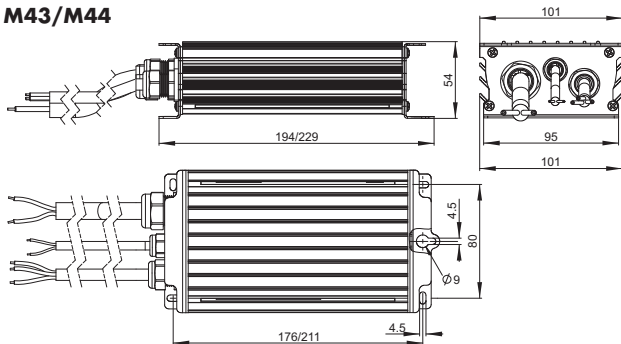

**M45**

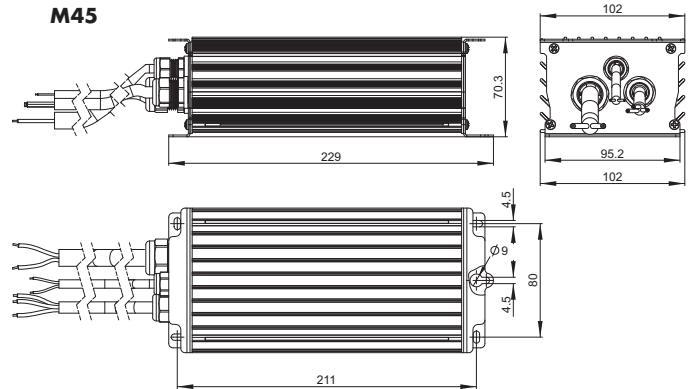

Lamp				Electronic ballast									System
Output W	Type	Base*	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V ±10%	Mains current A	Energy-efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Weight g	Output W
<b>DALI/MidNight (Dual) – Casing M43, M44 and M45</b>													
50	HI/HS	G8.5, G12, E27	1 x 50	EHXd 50.360	<b>183060</b>	220-240	0.27-0.22	A2	-25 to 80	max. 85	M43	1000	55
70	HI/HS	G8.5, GU8.5, GX8.5, G12, PG12-2, E27, RX7s	1 x 73	EHXd 70.361	<b>183061</b>	220-240	0.37-0.31	A2	-25 to 75	max. 85	M43	1000	80
100	HI/HS	G12, E40	1 x 100	EHXd 100.362	<b>183062</b>	220-240	0.50-0.43	A2	-25 to 65	max. 75	M44	1200	107
150	HI/HS	G12, G22, PGX12-2, Fc2, E27, E40, RX7s	1 x 150	EHXd 150.363	<b>183063</b>	220-240	0.76-0.64	A2	-25 to 80	max. 80	M44	1200	161
250	HI/HS	Fc2, E40, RX7s	1 x 250	EHXd 250.364	<b>183064</b>	220-240	1.25-1.07	A2	-25 to 65	max. 65	M45	1500	267

Circuit diagrams see page 96

\* Please ensure that lamps are only dimmed if specified as "dimmable" by the manufacturer.

## Luminaire Protection Device SP 230/10K

### For electronic devices

When electronic components form part of lighting systems, it is often necessary to protect such components against power-supply interruptions and electric overloads (power surges).



These can be caused by switching inductive loads or by atmospheric discharges such as lightning striking the mains or the ground. A further cause can be induced voltages from neighbouring cables when working with leading-edge phase-cutting controls.

Suitable for luminaires of protection class I and II  
Solid connecting wire: 0.5 mm<sup>2</sup>  
Lead length: 50 mm

The SP230/10K protection unit reduces over-voltages at the connection terminals of electronic components. The remaining residual voltage is then reduced to a respective protective level, based on the discharge current (see diagram below).



### Wiring diagram




Type	Best.-Nr.	Voltage AC 50, 60 Hz V ±10%	Impulse voltage U <sub>OC</sub> (V)	Impulse discharge current I <sub>N</sub> (8/20 μs) (A)	Protection level at discharge current of 1,000 A (V)	Min. ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Weight g
SP 230/10 K	<b>147230</b>	220-240	max. 10,000	max. 10,000	≤ 850	-30		20

Bandwidth of the standard impulse: tr = 20 μs  
The protection unit can withstand at least 10 spikes  
of 5 kA.

### Residual voltage, based on the discharge current (B)

A = Leak current | B = Protection levels

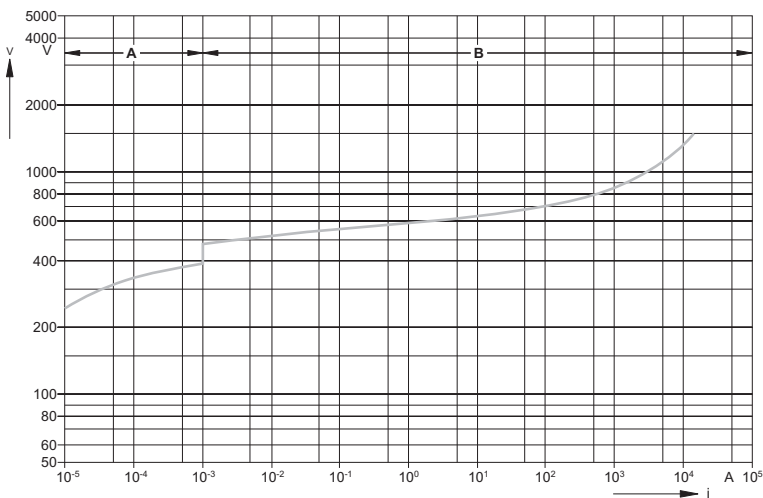

Source: Epcos Databook 2011

## Control Gear Units for HS and HI Lamps 35 to 150 W

**Compact plastic casing**  
**Shape: 64 x 72 mm**

For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)  
Compact control gear unit with ballast with patented, intelligent thermal cut-out with automatic reset (which evaluates the temperature and current of the ballast), digital timer ignitor with IPP++ technology and compensation capacitor with thermal fuse

As individual components no longer need to be wired, there is a significant reduction in assembly time and costs.

### Protection class II

Degree of protection: IP40


Permissible load capacity: 20-1000 pF

Lead length to the lamp: max. 10 m  
tw 130

Push-in terminals: 0.5-2.5 mm<sup>2</sup>

Cord grips for mains and lamp leads

Further outputs and voltages on request

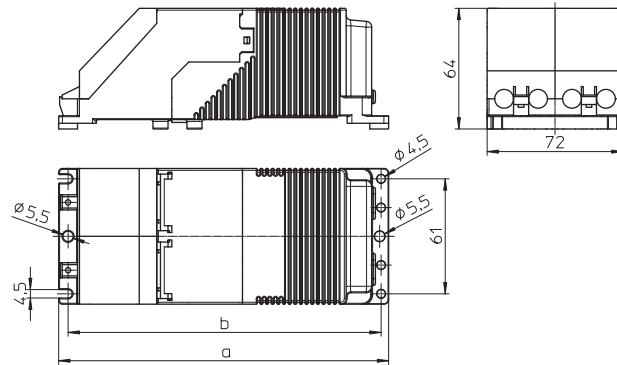

Lamp			Control gear unit									
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	Mains current A	a mm	b mm	Weight kg	t <sub>a</sub> °C	Power factor λ	Energy efficiency*
<b>230 V, 50 Hz</b>												
35	HS, HI	0.53	VNaHJ 35PZTG.568	<b>536199</b>	230, 50	0.210	175	166	1.32	55	0.92	EEI=A3
70	HS, HI	0.98	VNaHJ 70PZTG.566	<b>535657</b>	230, 50	0.380	175	166	1.32	45	0.91	EEI=A3
100	HS, HI	1.20	VNaHJ 100PZTG.571	<b>536200</b>	230, 50	0.560	214	205	1.85	45	0.85	EEI=A3
150	HS, HI	1.80	VNaHJ 150PZTG.567	<b>535695</b>	230, 50	0.720	214	205	2.25	45	0.91	EEI=A3
<b>240 V, 50 Hz</b>												
35	HS, HI	0.53	VNaHJ 35PZTG.568	<b>536201</b>	240, 50	0.210	175	166	1.32	55	0.94	EEI=A3
70	HS, HI	0.98	VNaHJ 70PZTG.566	<b>536202</b>	240, 50	0.370	175	166	1.32	40	0.94	EEI=A3
100	HS, HI	1.20	VNaHJ 100PZTG.571	<b>536203</b>	240, 50	0.560	214	205	1.85	40	0.86	EEI=A3
150	HS, HI	1.80	VNaHJ 150PZTG.567	<b>536204</b>	240, 50	0.730	214	205	2.25	40	0.91	EEI=A3
<b>220 V, 60 Hz</b>												
35	HS, HI	0.53	VNaHJ 35PZTG.574	<b>536205</b>	220, 60	0.220	175	166	1.32	60	0.98	EEI=A3
70	HS, HI	0.98	VNaHJ 70PZTG.575	<b>536207</b>	220, 60	0.370	175	166	1.32	50	0.97	EEI=A3
150	HS, HI	1.80	VNaHJ 150PZTG.576	<b>536209</b>	220, 60	0.800	214	205	2.25	45	0.98	EEI=A3

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017



## Control Gear Units IP65 for HS and HI Lamps 35 to 150 W

**Encapsulated unit in compact plastic casing**  
**Shape: 61 x 72 mm**

For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)  
 Compact control gear unit with ballast with patented, intelligent thermal cut-out with automatic reset (which evaluates the temperature and current of the ballast), digital timer ignitor with IPP++ technology and compensation capacitor with thermal fuse

As individual components no longer need to be wired, there is a significant reduction in assembly time and costs.



### Protection class II

Degree of protection: IP65

Permissible load capacity: 20-1000 pF

Lead length to the lamp: max. 10 m

tw 130

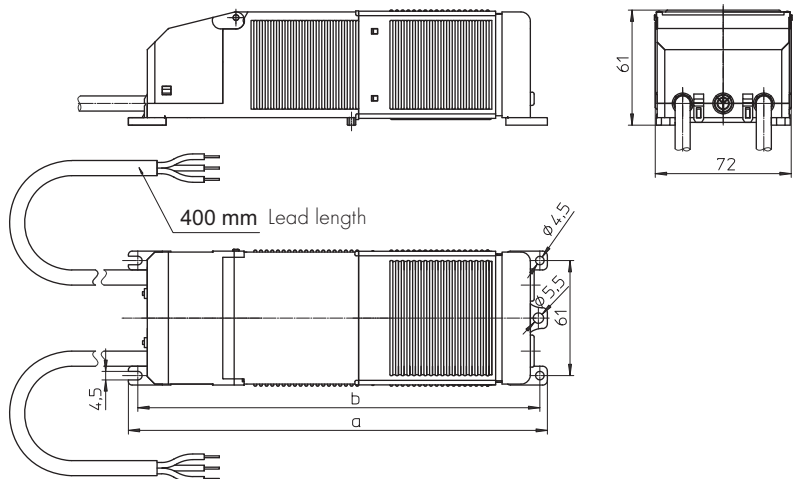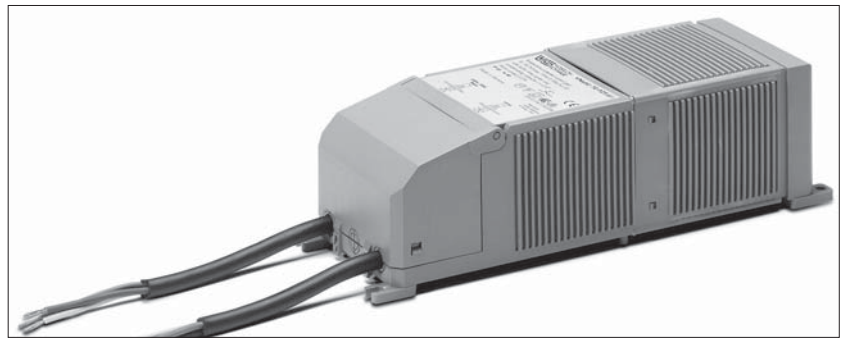


Lamp			Control gear unit									
Output W	Type	Current A	Type	Ref. No.	Voltage V, Hz	Mains current A	a mm	b mm	Weight kg	t <sub>a</sub> °C	Power factor λ	Energy efficiency*
<b>230 V, 50 Hz</b>												
35	HS, HI	0.53	VNaHJ 35PZTG.050	<b>533391</b>	230, 50	0.240	222	214	1.95	60	0.96	EEI=A3
50	HS	0.76	VNaH 50PZTG.058	<b>543733</b>	230, 50	0.290	222	214	1.95	60	0.94	EEI=A3
70	HS, HI	0.98	VNaHJ 70PZTG.051	<b>533392</b>	230, 50	0.370	222	214	1.95	50	0.97	EEI=A3
100	HS, HI	1.20	VNaHJ 100PZTG.078	<b>533393</b>	230, 50	0.560	249	240	2.25	55	0.90	EEI=A3
150	HS, HI	1.80	VNaHJ 150PZTG.052	<b>533394</b>	230, 50	0.740	249	240	2.75	50	0.94	EEI=A3
<b>240 V, 50 Hz</b>												
35	HS, HI	0.53	VNaHJ 35PZTG.053	<b>534107</b>	240, 50	0.240	222	214	1.95	60	0.96	EEI=A3
70	HS, HI	0.98	VNaHJ 70PZTG.054	<b>534109</b>	240, 50	0.370	222	214	1.95	50	0.97	EEI=A3
150	HS, HI	1.80	VNaHJ 150PZTG.055	<b>534115</b>	240, 50	0.730	249	240	2.75	50	0.95	EEI=A3
<b>220 V, 60 Hz</b>												
35	HS, HI	0.53	VNaHJ 35PZTG.041	<b>534122</b>	220, 60	0.220	222	214	1.95	70	0.98	EEI=A3
70	HS, HI	0.98	VNaHJ 70PZTG.067	<b>534111</b>	220, 60	0.370	222	214	1.95	50	0.97	EEI=A3
150	HS, HI	1.80	VNaHJ 150PZTG.068	<b>534117</b>	220, 60	0.800	249	240	2.25	45	0.98	EEI=A3

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Control Gear Units for HS and HI Lamps 250 and 400 W

Shape: 76x91 mm

For high pressure sodium lamps (HS),  
metal halide lamps (HI) and  
ceramic discharge lamps (C-HI)  
Fully wired slim, weather-proof control gear unit  
with ballast with thermal cut-out with automatic reset,  
capacitor, timer ignitor and connection terminal  
Suitable for installation in or on pylons  
Frontal cable feed using a PG thread fitting  
Front access to terminals  
Screw-fixed end cap  
Screw terminals: 0.75-2.5 mm<sup>2</sup>  
For luminaires of protection class I  
Degree of protection: IP54  
Permissible load capacity: 20-1000 pF  
Distance to the lamp: max. 10 m  
tw 130  
With connection for protective earth conductor

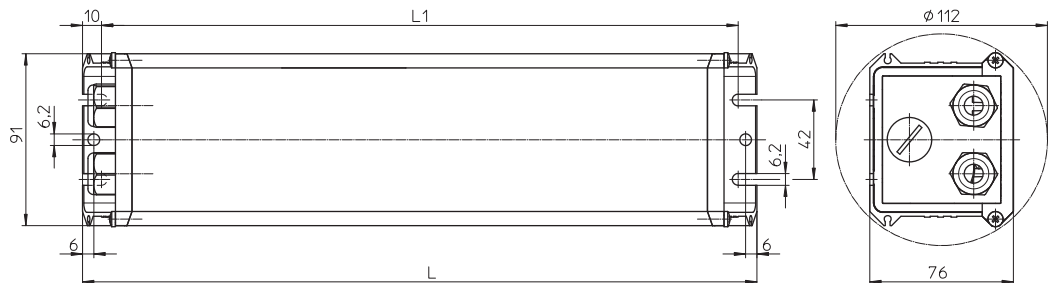


Lamp				Control gear unit							
Output W	Type	Current A	Mains current A	Type	Ref. No.	Voltage AC V, Hz	L mm	L1 mm	Weight kg	Power factor λ	Energy efficiency*
250	HS, HI	3.0	1.3	VNaHJ 250PZT.745	<b>531476</b>	230, 50	322	302	4.30	> 0.94	EEI=A3
400	HS, HI	4.45	2.0	VNaHJ 400PZT.743	<b>531475</b>	230, 50	357	337	5.62	> 0.91	A2

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Ballast Units for HS and HI Lamps 600 to 2000 W

Shape: 114x116 mm

For high-pressure sodium vapour lamps (HS) and metal halide lamps (HI)  
Slim, weather-proof ballast unit fully wired with ballast, capacitor and connection terminal  
Suitable for installation in or on pylons  
With connection for protective earth conductor  
Frontal cable feed using a PG thread fitting  
Front access to terminals or fuses  
Optional additional third PG connection for mains feed-through wiring  
Screw-fixed end cap  
Diverse mounting options using an assembly plate or rail  
Screw terminals: 0.75-10 mm<sup>2</sup>  
For luminaires of protection class I  
tw 130

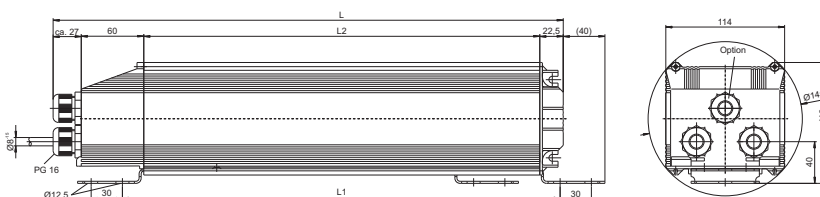

### Degree of protection: IP54

Lamp				Ballast unit								
Output W	Type	Current A	Mains current A	Type	Ref. No.	Voltage AC V, Hz	L mm	L1 mm	L2 mm	Weight kg	Power factor λ	Energy efficiency*
600	HS	6.2	3.1	VNaH 600.02	<b>531182</b>	230-240, 50	452	375	335	9.6	> 0.90	A2
1000	HS	10.3	5.0	VNaHJ 1000.61	<b>531472</b>	230-240, 50	487	410	370	11.6	> 0.90	A2
	HI	9.5	4.9									A2
2000	HI	8.8	5.7	VJ 2000.05	<b>531193</b>	380-400, 50	570	500	460	15.2	> 0.90	A2
2000	HI	10.3	6.0	VJD 2000.63	<b>531474</b>	380-400, 50	627	550	510	20.2	> 0.90	A2

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

### Degree of protection: IP65

Fully encapsulated ballast unit with leads

Lamp				Ballast unit								
Output W	Type	Current A	Mains current A	Type	Ref. No.	Voltage AC V, Hz	L mm	L1 mm	L2 mm	Weight kg	Power factor λ	Energy efficiency*
1000	HS	10.3	5.0	VNaHJ 1000.61	<b>531480</b>	220, 50	487	410	370	11.6	> 0.90	A2
	HI	9.5	4.9									A2
2000	HI	10.3	6.0	VJD 2000.63	<b>531481</b>	380, 50	627	550	510	20.2	> 0.90	A2

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017


## Ballast Units for HS and HI Lamps 1000 to 2000 W

### Encapsulated in a plastic casing

For high-pressure sodium vapour lamps (HS) and metal halide lamps (HI)  
Fully encapsulated ballast unit in a self-extinguishing, fibre-glass-reinforced polyamide casing consisting of a ballast, capacitor, fuse and a ready-to-use, pre-wired connection terminal.  
Cable feed using a PG thread fitting  
Screw terminals: 0.75-10 mm<sup>2</sup>

### Protection class II

tw 130

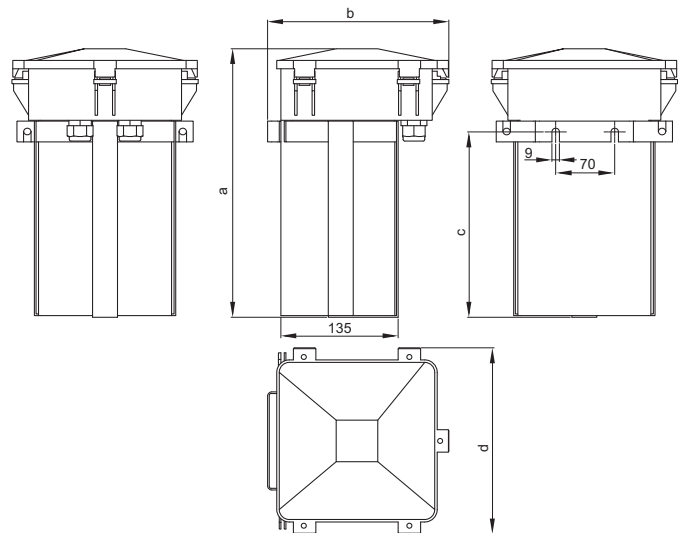

### Degree of protection: IP65

With double insulation

Lamp				Ballast unit										
Output W	Type	Current A	Mains current (A)	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	d mm	Weight kg	Power factor λ	Energy efficiency*	
<b>230/240 V, 50 Hz and 380/400/415 V, 50 Hz</b>														
<b>new</b>	1000	HS	10.3/11.3	5.75	VNaHJ 1000.75	<b>554313</b>	230/240, 50	288	217	–	220	15	> 0.90	A2
		HI	9.5	4.9										A2
<b>new</b>	2000	HI	8.8/9.2	5.7	VJ 2000.76	<b>554314</b>	380/400/415, 50	320	217	225	225	21	> 0.90	A2
<b>new</b>	2000	HI	10.3/11.3	6.0	VJD 2000.77	<b>554315</b>	380/400/415, 50	320	220	225	225	23	> 0.90	A2
<b>new</b>	2000	HI	12.2	6.0	VJD 2000I.78	<b>554316</b>	380/400/415, 50	320	220	225	225	25	> 0.90	A2
<b>220 V, 60 Hz and 380 V, 60 Hz</b>														
<b>new</b>	1000	HS	10.3/11.3	5.75	VNaHJ 1000.75	<b>554904</b>	220, 60	288	217	–	220	15	> 0.90	A2
		HI	9.5	4.9										A2
<b>new</b>	2000	HI	8.8/9.2	5.7	VJ 2000.76	<b>554905</b>	380, 60	320	220	225	225	21	> 0.90	A2
<b>new</b>	2000	HI	10.3/11.3	6.0	VJD 2000.77	<b>554906</b>	380, 60	320	220	225	225	23	> 0.90	A2
<b>new</b>	2000	HI	12.2	6.0	VJD 2000I.78	<b>554909</b>	380, 60	320	220	225	225	25	> 0.90	A2

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Compact Assembly Kits for HS and HI Lamps 35 to 150 W

**Ballast shape: 53x66 mm**

For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)  
Compact assembly kit with ballast with or without patented, intelligent thermal cut-out with automatic reset (which evaluates the temperature and current of the ballast), super-imposed ignitor and compensation capacitor

With luminaire terminal block:

screw terminal 0.75-2.5 mm<sup>2</sup>

With earth terminal

Permissible load capacity: 20-100 pF

Lead length to the lamp: max. 1.5 m





tw 130

On request:

Further outputs and voltages

With digital timer ignitor

For pulse ignition system

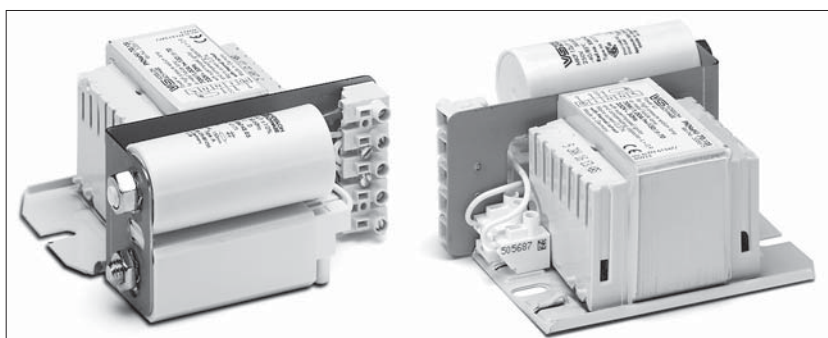

**As individual components no longer need to be wired, there is a significant reduction in assembly time and costs.**

**Especially suitable for change of lamp technology from HM to HS.**

Lamp			Assembly kit											
Output	Type	Current	Type	Ref. No.	Voltage AC	Mains current	Temperature protection	a	b	c	d	Weight	Power factor	Energy efficiency*
W		A			V, Hz	A		mm	mm	mm	mm	kg	λ	
<b>230 V, 50 Hz</b>														
35	HS, HI	0.53	PKNaHJ 35.008	<b>546797</b>	230, 50	0.22	yes	117	86	108	54	1.2	> 0.90	EEI=A3
50	HS	0.76	PKNaH 50PZT.992	<b>543378</b>	230, 50	0.30	yes	117	86	111	59	1.4	> 0.90	EEI=A3
70	HS, HI	0.98	PKNaHJ 70.128	<b>538675</b>	230, 50	0.37	yes	117	86	111	59	1.4	> 0.90	EEI=A3
							no							EEI=A3
100	HS, HI	1.20	PKNaHJ 100.941	<b>538676</b>	230, 50	0.56	yes	117	86	111	59	1.6	> 0.90	EEI=A3
							no							EEI=A3
150	HS, HI	1.80	PKNaHJ 150.620	<b>538677</b>	230, 50	0.74	yes	151	120	115	63	2.2	> 0.90	EEI=A3
							no							EEI=A3
<b>220 V, 60 Hz</b>														
35	HS, HI	0.53	PKNaHJ 35.008	<b>547285</b>	220, 60	0.23	yes	117	86	108	54	1.2	> 0.90	EEI=A3
				<b>543401</b>			no							
70	HS, HI	0.98	PKNaHJ 70.653	<b>547287</b>	220, 60	0.37	yes	117	86	111	59	1.4	> 0.90	EEI=A3
				<b>538680</b>			no							
100	HS, HI	1.20	PKNaHJ 100.271	<b>538681</b>	220, 60	0.56	no	117	86	111	59	1.6	> 0.90	EEI=A3
150	HS, HI	1.80	PKNaHJ 150.679	<b>538682</b>	220, 60	0.74	no	151	120	115	63	2.2	> 0.90	EEI=A3
<b>220/240 V, 60 Hz</b>														
100	HS, HI	1.20	PKNaHJ 100.345	<b>543295</b>	220/240, 60	0.60	no	117	86	111	60	1.6	> 0.90	EEI=A3
150	HS, HI	1.80	PKNaHJ 150.301	<b>543299</b>	220/240, 60	0.80	no	151	120	115	63	2.2	> 0.90	EEI=A3

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Compact Assembly Kits for HS and HI Lamps 250 and 400 W

**Ballast shape: 71x75 mm**

For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)  
Compact assembly kit with ballast with or without thermal cut-out with automatic reset, superimposed ignitor and compensation capacitor

With luminaire terminal block:

screw terminal 0.75-2.5 mm<sup>2</sup>

With earth terminal

Permissible load capacity: 20-100 pF





Lead length to the lamp: max. 1.5 m  
tw 130

On request:

Further outputs and voltages

With digital timer ignitor

For pulse ignition system

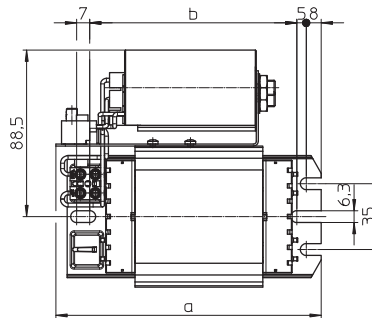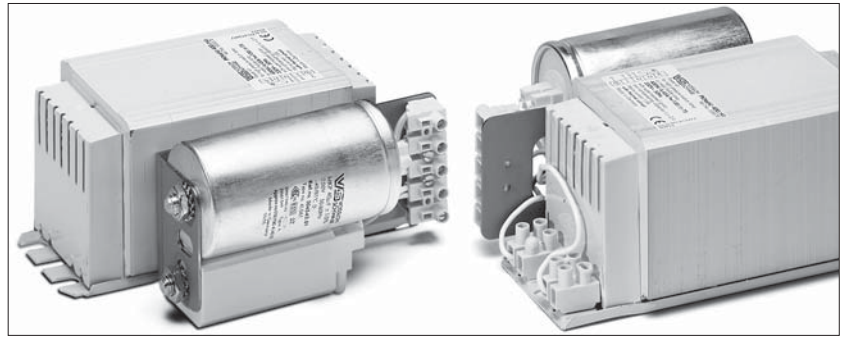

**As individual components no longer need to be wired, there is a significant reduction in assembly time and costs.**

**Especially suitable for change of lamp technology from HM to HS.**

Lamp			Assembly kit											
Output	Type	Current	Type	Ref. No.	Voltage AC	Mains current	Temperature protection	a	b	c	d	Weight	Power factor	Energy efficiency*
W		A			V, Hz	A		mm	mm	mm	mm	kg	λ	
<b>230 V, 50 Hz</b>														
250	HS, HI	3.00	PKNaHJ 250.741	<b>538678</b>	230, 50	1.20	yes	141	110	128	73	3.2	> 0.90	A2
				<b>538688</b>			no							A2
400	HS, HI	4.45	PKNaHJ 400.743	<b>538679</b>	230, 50	1.80	yes	171	140	129	73	5.2	> 0.90	A2
				<b>538689</b>			no							A2
<b>220 V, 60 Hz</b>														
250	HS, HI	3.00	PKNaHJ 250.742	<b>538683</b>	220, 60	1.20	no	141	110	126	71	3.2	> 0.90	A2
400	HS, HI	4.45	PKNaHJ 400.744	<b>538684</b>	220, 60	1.80	no	171	140	129	71	5.2	> 0.90	A2

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017



## Standard Ballasts for HS and HI Lamps 35 to 70 W

Shape: 53 x 66 mm

For high pressure sodium lamps (HS),  
metal halide lamps (HI) and  
ceramic discharge lamps (C-HI)




Vacuum-impregnated with polyester resin

Screw terminals: 0.5-2.5 mm<sup>2</sup>

Protection class I

tw 130

Ballasts for pulse ignition system on request

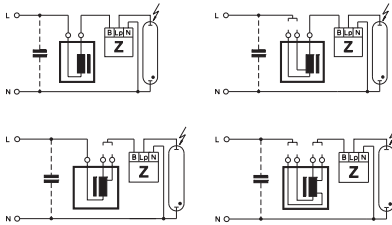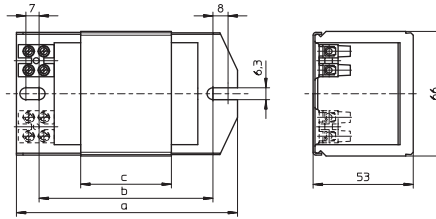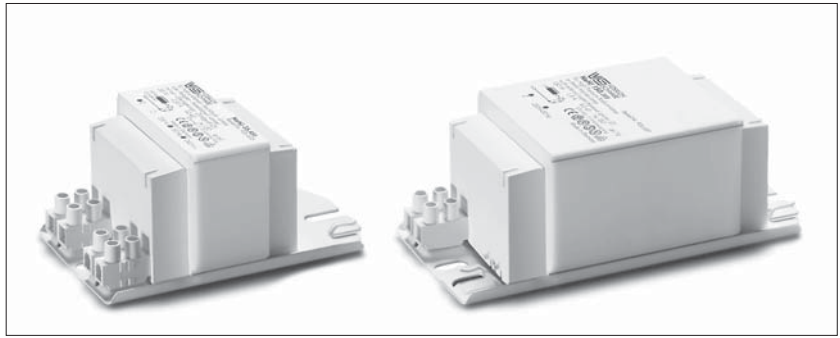

Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
35	HS, HI	0.53	NaHJ 35.485	<b>526517</b>	220/230, 50	108	86	36	1.07	60	0.40	EEl=A3	6	0.22/0.21
35	HS, HI	0.53	NaHJ 35.485	<b>161367</b>	230/240, 50	108	86	36	1.07	60	0.40	EEl=A3	6	0.22/0.21
35	HS, HI	0.53	NaHJ 35.638	<b>161371</b>	220, 60	108	86	36	1.07	50	0.41	EEl=A3	5	0.23
50	HS	0.76	NaH 50.486	<b>161379</b>	230/240, 50	108	86	36	1.07	65	0.37	EEl=A3	8	0.30/0.29
50	HS	0.76	NaH 50.654	<b>161399</b>	220, 60	108	86	36	1.07	60	0.36	EEl=A3	8	0.31
50	HS	0.76	NaHJ 70/50.157	<b>160613</b>	230, 50	108	86	42	1.23	55	0.37	EEl=A3	8	0.30
70	HS, HI	0.98			230, 50	108	86	36	1.07	70	0.37	EEl=A3	12	0.38
70	HS, HI	0.98	NaHJ 70.300	<b>174961</b>	220, 50	108	86	36	1.07	75	0.40	EEl=A3	12	0.40
70	HS, HI	0.98	NaHJ 70.128	<b>533568</b>	230, 50	108	86	36	1.07	70	0.36	EEl=A3	12	0.38
70	HS, HI	0.98	NaHJ 70.128	<b>539434</b>	230/240, 50	108	86	36	1.07	70/75	0.36	EEl=A3	12	0.38/0.37
70	HS, HI	0.98	NaHJ 70.158	<b>161662</b>	240, 50	108	86	42	1.23	70	0.36	EEl=A3	12	0.37
70	HS, HI	0.98	NaHJ 70.128	<b>538407</b>	240, 50	108	86	36	1.07	75	0.37	EEl=A3	12	0.37
70	HS, HI	0.98	NaHJ 70.653	<b>161392</b>	220, 60	108	86	36	1.07	60	0.42	EEl=A3	10	0.40

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Standard Ballasts for HS and HI Lamps 70 to 250 W

Shape: 53 x 66 mm

Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
70	HS, HI	0.98	NaHJ 100/70.703	<b>161469</b>	230, 50	145	120	55	1.55	60	0.37	EEl=A3	12	0.38
100	HS, HI	1.20								70	0.43	EEl=A3	12	0.55
70	HS, HI	0.98	NaHJ 100/70.519	<b>161158</b>	230/240, 50	145	120	75	2.03	50	0.36	A2	12	0.38/0.37
100	HS, HI	1.20								60	0.42	EEl=A3	12	0.55/0.53
70	HS, HI	0.98	NaHJ 100/70.709	<b>161471</b>	220, 60	145	120	55	1.55	50	0.39	EEl=A3	10	0.40
100	HS, HI	1.20								60	0.44	EEl=A3	10	0.57
100	HS, HI	1.20	NaHJ 100.126	<b>507671</b>	220, 50	108	86	42	1.24	75	0.44	EEl=A3	12	0.55
100	HS, HI	1.20	NaHJ 100.941	<b>161707</b>	230/240, 50	108	86	42	1.24	75/80	0.42	EEl=A3	12	0.55/0.53
100	HS, HI	1.20	NaHJ 100.271	<b>530195</b>	220, 60	108	86	42	1.24	75	0.45	EEl=A3	10	0.57
150	HS, HI	1.80	NaHJ 150.159	<b>533602</b>	220, 50	145	120	64	1.80	75	0.41	EEl=A3	20	0.80
150	HS, HI	1.80	NaHJ 150.620	<b>533565</b>	230, 50	145	120	64	1.80	70	0.40	EEl=A3	20	0.77
150	HS, HI	1.80	NaHJ 150.620	<b>534540</b>	240, 50	145	120	64	1.80	75	0.40	EEl=A3	20	0.74
150	HS, HI	1.80	NaHJ 150.679	<b>526196</b>	220, 60	145	120	55	1.55	75	0.44	EEl=A3	16	0.80
150	HS, HI	1.80	NaHJ 150.679	<b>537793</b>	220, 60	117	92	55	1.55	75	0.44	EEl=A3	16	0.80
250	HS, HI	3.00	NaHJ 250.204	<b>529087</b>	220, 50	160	135	95	2.50	80	0.42	EEl=A3	32	1.32
250	HS, HI	3.00	NaHJ 250.160	<b>160597</b>	220, 50	180	155	110	2.84	75	0.41	EEl=A3	32	1.32
250	HS, HI	3.00	NaHJ 250.915	<b>161686</b>	230, 50	180	155	110	2.84	80	0.40	EEl=A3	32	1.26
250	HS, HI	3.00	NaHJ 250.340	<b>504109</b>	230/240, 50	180	155	110	2.84	80	0.39	EEl=A3	32	1.26/1.21
250	HS, HI	3.00	NaHJ 250.340	<b>178177</b>	240, 50	180	155	110	2.84	80	0.39	EEl=A3	32	1.21
250	HS, HI	3.00	NaHJ 250.163	<b>529072</b>	220, 60	160	135	95	2.50	70	0.42	A2	25	1.35
250	HS, HI	3.00	NaHJ 250.163	<b>160604</b>	220, 60	180	155	95	2.50	70	0.42	A2	25	1.35

\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

1

2

3

4

5

6

7

8



9

10


## Ballasts with Thermal Cut-out for HS and HI Lamps 35 to 150 W

Shape: 53 x 66 mm


For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)  
 Vacuum-impregnated with polyester resin  
 With VS-patented, intelligent temperature switch with automatic reset (evaluates the temperature and current of the ballast)  
 Protection class I  
 Iw 130  
 Ballasts for pulse ignition system on request

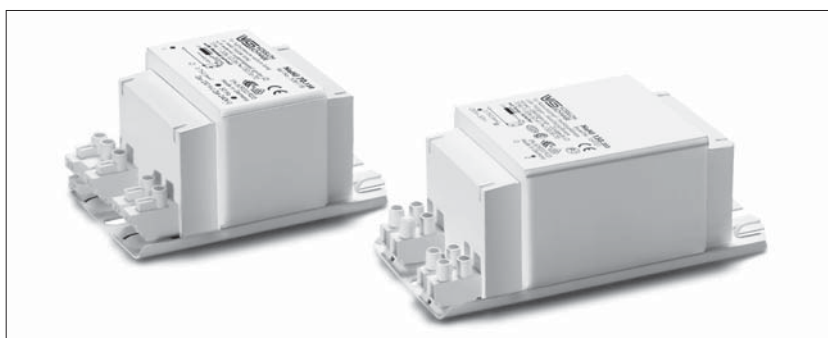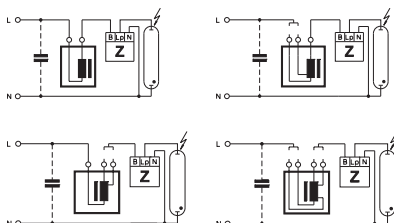

**A** Push-in terminals: 0.5-1.5 mm<sup>2</sup>

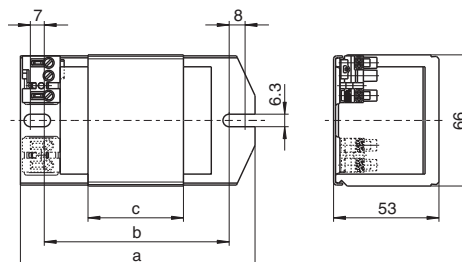

**B** Screw terminals: 0.5-2.5 mm<sup>2</sup>

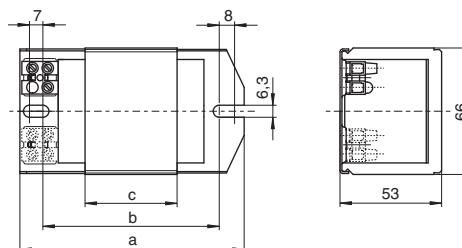

Lamp			Ballast										Capacitor		
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	Drawing	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>P</sub> μF	I <sub>N</sub> A
<b>Push-in terminals: 0.5-1.5 mm<sup>2</sup></b>															
35	HS, HI	0.53	NaHJ 35.209	<b>543737</b>	230/240, 50	A	108	86	36	1.07	35	0.36	A2	6	0.22
35	HS, HI	0.53	NaHJ 35.485	<b>506122</b>	230/240, 50	A	108	86	36	1.07	60	0.40	EEI=A3	6	0.22/0.21
35	HS, HI	0.53	NaHJ 35.638	<b>509170</b>	220, 60	A	108	86	36	1.07	50	0.41	EEI=A3	5	0.23
50	HS	0.76	NaH 50.206	<b>543738</b>	230, 50	A	108	86	48	1.39	45	0.35	A2	8	0.30
50	HS	0.76	NaHJ 70/50.157	<b>507341</b>	230, 50	A	108	86	42	1.23	55	0.37	EEI=A3	8	0.30
70	HS, HI	0.98			70						70	0.37	EEI=A3	12	0.38
50	HS	0.76	NaHJ 70/50.520	<b>538361</b>	230, 50	A	117	92	55	1.55	45	0.36	EEI=A3	8	0.30
70	HS, HI	0.98			70						55	0.36	EEI=A3	12	0.38
70	HS, HI	0.98	NaHJ 70.128	<b>535191</b>	230, 50	A	108	86	36	1.07	70	0.36	EEI=A3	12	0.38
70	HS, HI	0.98	NaHJ 70.226	<b>543741</b>	230, 50	A	108	86	48	1.39	50	0.37	A2	12	0.38
70	HS, HI	0.98	NaHJ 70.128	<b>533572</b>	230/240, 50	A	108	86	36	1.07	70/75	0.36	EEI=A3	12	0.38/0.37
70	HS, HI	0.98	NaHJ 70.653	<b>509169</b>	220, 60	A	108	86	36	1.07	60	0.42	EEI=A3	10	0.40
70	HS, HI	0.98	NaHJ 100/70.703	<b>507342</b>	230, 50	A	145	120	55	1.55	60	0.37	EEI=A3	12	0.38
100	HS, HI	1.20			70						70	0.43	EEI=A3	12	0.55
100	HS, HI	1.20	NaHJ 100.213	<b>543739</b>	230, 50	A	117	92	55	1.55	55	0.41	A2	12	0.55
100	HS, HI	1.20	NaHJ 100.670	<b>506120</b>	230/240, 50	A	117	92	55	1.55	70	0.42	EEI=A3	12	0.55/0.53
100	HS, HI	1.20	NaHJ 100.941	<b>539492</b>	230/240, 50	A	108	86	42	1.23	75/80	0.42	EEI=A3	12	0.55/0.53
100	HS, HI	1.20	NaHJ 150/100.973	<b>507343</b>	230, 50	A	145	120	75	2.02	55	0.41	A2	12	0.55
150	HS, HI	1.80			75						75	0.41	EEI=A3	20	0.57
150	HS, HI	1.80	NaHJ 150.620	<b>535216</b>	230, 50	A	145	120	64	1.80	70	0.40	EEI=A3	20	0.77
150	HS, HI	1.80	NaHJ 150.620	<b>538543</b>	230/240, 50	A	145	120	64	1.80	70/75	0.40	EEI=A3	20	0.77/0.74
150	HS, HI	1.80	NaHJ 150.355	<b>509100</b>	230/240, 50	A	145	120	75	2.02	65	0.39	EEI=A3	20	0.77/0.74
150	HS, HI	1.80	NaHJ 150.679	<b>509171</b>	220, 60	A	145	120	75	2.02	65	0.42	EEI=A3	16	0.80

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Ballasts with Thermal Cut-out for HS and HI Lamps 35 to 250 W

Shape: 53 x 66 mm

Lamp			Ballast											Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	Drawing	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
<b>Screw terminals: 0.5–2.5 mm<sup>2</sup></b>															
35	HS, HI	0.53	NaHJ 35.485	<b>503010</b>	230/240, 50	B	108	86	36	1.07	60	0.40	EEI=A3	6	0.22/0.21
35	HS	0.53	NaH 50/35.797	<b>539515</b>	230, 50	B	108	86	36	1.07	45	0.40	EEI=A3	6	0.22
50	HS	0.76									70	0.37	EEI=A3	8	0.30
50	HS	0.76	NaH 50.486	<b>507498</b>	230/240, 50	B	108	86	36	1.07	65	0.37	EEI=A3	8	0.30
50	HS	0.76	NaHJ 70/50.695	<b>507697</b>	230/240, 50	B	108	86	48	1.39	50	0.37	EEI=A3	8	0.30/0.29
70	HS, HI	0.98									70	0.37	EEI=A3	12	0.38/0.37
70	HS, HI	0.98	NaHJ 70.128	<b>536582</b>	230, 50	B	108	86	36	1.07	70	0.36	EEI=A3	12	0.38
70	HS, HI	0.98	NaHJ 70.158	<b>169722</b>	230/240, 50	B	108	86	42	1.23	70	0.36	EEI=A3	12	0.38/0.37
70	HS, HI	0.98	NaHJ 70.128	<b>538830</b>	230/240, 50	B	108	86	36	1.07	70/75	0.36	EEI=A3	12	0.38/0.37
70	HS, HI	0.98	NaHJ 70.158	<b>546817</b>	240, 50	B	108	86	42	1.23	70	0.36	EEI=A3	12	0.37
70	HS, HI	0.98	NaHJ 100/70.703	<b>504131</b>	230, 50	B	117	92	55	1.55	60	0.37	EEI=A3	12	0.38
100	HS, HI	1.20									70	0.43	EEI=A3	12	0.55
100	HS, HI	1.20	NaHJ 100.941	<b>543349</b>	230, 50	B	108	86	42	1.23	75	0.42	EEI=A3	12	0.55
100	HS, HI	1.20	NaHJ 100.941	<b>502799</b>	230/240, 50	B	108	86	42	1.23	75/80	0.42	EEI=A3	12	0.55/0.53
100	HS, HI	1.20	NaHJ 150/100.973	<b>504135</b>	230, 50	B	145	120	75	2.02	55	0.41	A2	12	0.55
150	HS, HI	1.80									75	0.41	EEI=A3	20	0.77
150	HS, HI	1.80	NaHJ 150.355	<b>539270</b>	220, 50	B	145	120	75	2.02	65	0.39	EEI=A3	20	0.80
150	HS, HI	1.80	NaHJ 150.620	<b>536593</b>	230, 50	B	145	120	64	1.80	70	0.40	EEI=A3	20	0.77
150	HS, HI	1.80	NaHJ 150.995	<b>169721</b>	230/240, 50	B	145	120	75	2.02	70	0.40	EEI=A3	20	0.77/0.74
150	HS, HI	1.80	NaHJ 150.620	<b>538831</b>	230/240, 50	B	145	120	64	1.80	70/75	0.40	EEI=A3	20	0.77/0.74
150	HS, HI	1.80	NaHJ 150.620	<b>537763</b>	240, 50	B	130	105	64	1.80	75	0.40	EEI=A3	20	0.74
150	HS, HI	1.80	NaHJ 150.679	<b>526616</b>	220, 60	B	145	120	75	2.02	65	0.42	EEI=A3	16	0.80
250	HS, HI	3.00	NaHJ 250.915	<b>505054</b>	230, 50	B	180	155	110	2.84	80	0.40	EEI=A3	32	1.26
250	HS, HI	3.00	NaHJ 250.340	<b>542349</b>	230/240, 50	B	180	155	110	2.84	80	0.39	EEI=A3	32	1.26
250	HS, HI	3.00	NaHJ 250.340	<b>508723</b>	240, 50	B	180	155	110	2.84	80	0.39	EEI=A3	32	1.26

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

1

2

3

4

5

6

7


8

9



10

## Compact Ballasts for HS and HI Lamps 35 to 150 W

Shape: 53 x 66 mm

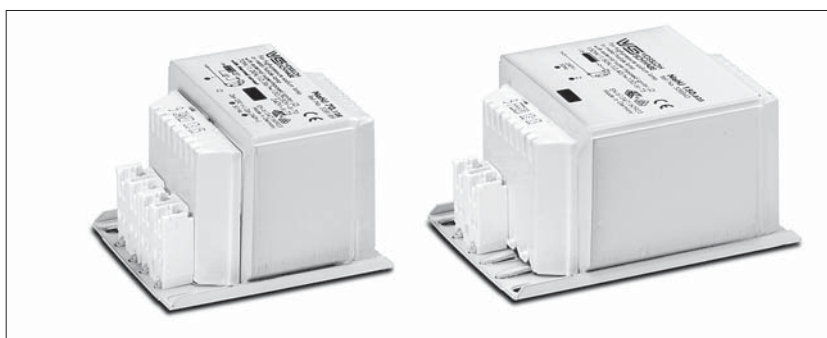

For high pressure sodium lamps (HS),  
metal halide lamps (HI) and  
ceramic discharge lamps (C-HI)  
Vacuum-impregnated with polyester resin  
Push-in terminals: 0.5-1 mm<sup>2</sup>  
IDC terminals for leads H05V-U 0.5  
Protection class I  
Ballasts with screw terminals on request

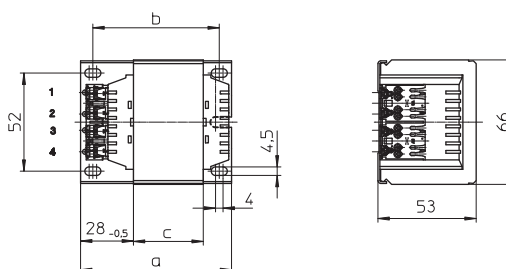

Lamp			Ballast											Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	t <sub>w</sub> °C	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
35	HS, HI	0.53	NaHJ 35.485	<b>538807</b>	230/240, 50	80	67	36	1.07	60	130	0.40	EEl=A3	6	0.22/0.21
70	HS, HI	0.98	NaHJ 70.128	<b>538810</b>	230, 50	80	67	36	1.07	70	130	0.36	EEl=A3	12	0.38
70	HS, HI	0.98	NaHJ 70.128	<b>538823</b>	230/240, 50	80	67	36	1.07	70/75	130	0.36	EEl=A3	12	0.38/0.37
70	HS, HI	0.98	NaHJ 70.653	<b>538828</b>	220, 60	80	67	36	1.07	60	130	0.42	EEl=A3	10	0.40
150	HS, HI	1.80	NaHJ 150.620	<b>538834</b>	230, 50	107	94	64	1.80	70	130	0.40	EEl=A3	20	0.77
150	HS, HI	1.80	NaHJ 150.625	<b>538843</b>	240, 50	107	94	64	1.80	75	130	0.40	EEl=A3	20	0.74
150	HS, HI	1.80	NaHJ 150.679	<b>542557</b>	220, 60	107	94	64	1.80	75	130	0.44	EEl=A3	16	0.80

\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## With Thermal Cut-out

Thermal cut-out with automatic reset

Lamp			Ballast											Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	t <sub>w</sub> °C	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
35	HS, HI	0.53	NaHJ 35.485	<b>538258</b>	230/240, 50	80	67	36	1.07	60	130	0.40	EEl=A3	6	0.22/0.21
70	HS, HI	0.98	NaHJ 70.128	<b>538189</b>	230/240, 50	80	67	36	1.07	70/75	130	0.36	EEl=A3	12	0.38/0.37
70	HS, HI	0.98	NaHJ 70.128	<b>539223</b>	230/240, 50	80	67	36	1.07	70/75	140	0.36	EEl=A3	12	0.38/0.37
70	HS, HI	0.98	NaHJ 70.653	<b>538537</b>	220, 60	80	67	36	1.07	60	130	0.42	EEl=A3	10	0.40
100	HS, HI	1.20	NaHJ 100.581	<b>539081</b>	230/240, 50	107	94	64	1.80	60	130	0.42	EEl=A3	12	0.55/0.53
150	HS, HI	1.80	NaHJ 150.159	<b>548260</b>	220, 50	107	94	64	1.80	75	130	0.41	EEl=A3	20	0.77
150	HS, HI	1.80	NaHJ 150.620	<b>538262</b>	230, 50	107	94	64	1.80	70	130	0.40	EEl=A3	20	0.77
150	HS, HI	1.80	NaHJ 150.620	<b>539306</b>	230, 50	107	94	64	1.80	70	140	0.40	EEl=A3	20	0.77
150	HS, HI	1.80	NaHJ 150.620	<b>538264</b>	240, 50	107	94	64	1.80	75	130	0.40	EEl=A3	20	0.74
150	HS, HI	1.80	NaHJ 150.620	<b>539286</b>	240, 50	107	94	64	1.80	75	140	0.40	EEl=A3	20	0.74
150	HS, HI	1.80	NaHJ 150.679	<b>539311</b>	220, 60	107	94	64	1.80	75	130	0.44	EEl=A3	16	0.80




\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Ballasts with Thermal Cut-out for HS and HI Lamps 35 to 150 W, Protection Class II

Encapsulated ballast in compact plastic casing  
Shape: 61 x 72 mm

For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)  
With cable holder  
Thermal cut-out with automatic reset  
Screw terminals: 0.5-2.5 mm<sup>2</sup>

Protection class II  
tw 130

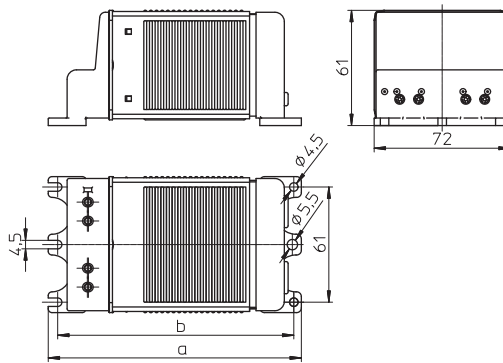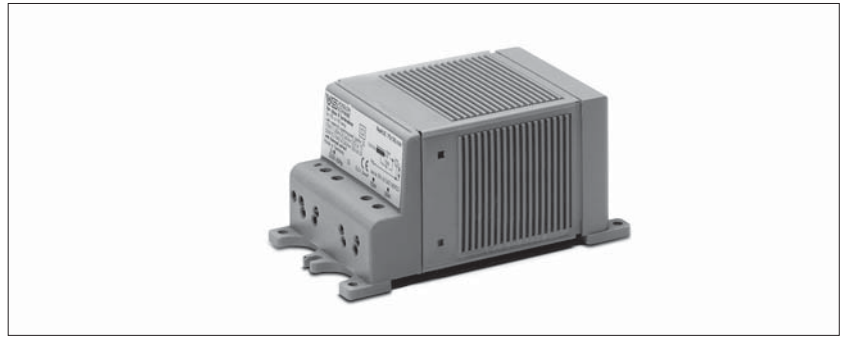


Lamp			Ballast									Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
35	HS	0.53	NaHZ 50/35.797	<b>539609</b>	230, 50	134	125	1.60	45	0.40	EEl=A3	6	0.22
50	HS	0.76							70	0.37	EEl=A3	8	0.30
50	HS	0.76	NaHJZ 70/50.520	<b>533395</b>	230, 50	134	125	1.60	45	0.36	EEl=A3	8	0.30
70	HS, HI	0.98							65	0.36	EEl=A3	12	0.38
70	HS, HI	0.98	NaHJZ 100/70.519	<b>533396</b>	230, 50	161	152	2.10	45	0.36	EEl=A3	12	0.38
100	HS, HI	1.20							60	0.42	EEl=A3	12	0.55
100	HS, HI	1.20	NaHJZ 150/100.466	<b>533398</b>	230, 50	161	152	2.30	45	0.41	A2	12	0.85
150	HS, HI	1.80							70	0.39	EEl=A3	20	0.77

\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017




## Ballasts with Thermal Cut-out and Thermal Fuse for HS and HI Lamps 35 to 150 W, Protection Class II

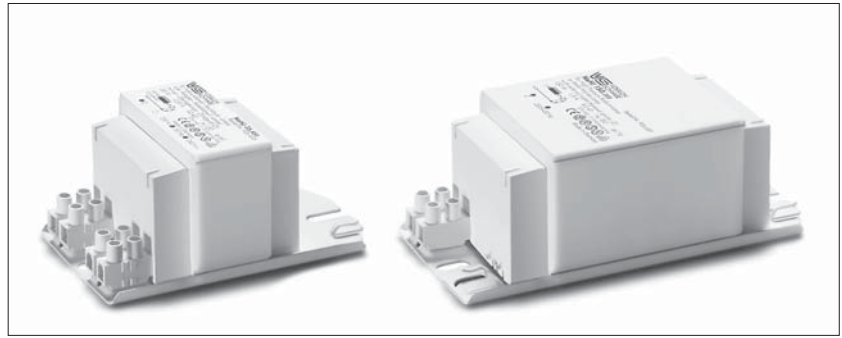


With double insulation  
Shape: 53 x 66 mm

For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)  
Thermal cut-out with automatic reset  
Screw terminals: 0,5-2,5 mm<sup>2</sup>

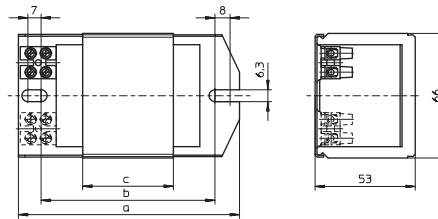

Protection class II

tw 130





Lamp	Ballast			Capacitor											
	Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
new 35	35	HS, HI	0.53	NaHZ 50/35.797	553806	230, 50	108	92	36	1.07	45	0.40	EEI=A3	6	0.22
	50	HS	0.76											8	0.30
new 50	50	HS	0.76	NaHJZ 70/50.785	509490	230, 50	108	92	42	1.24	50	0.35	A2	8	0.30
	70	HS, HI	0.98											12	0.38
new 70	70	HS, HI	0.98	NaHJZ 100/70.786	509491	230, 50	145	120	69	1.83	55	0.38	EEI=A3	12	0.38
	100	HS, HI	1.20											12	0.55
new 100	100	HS, HI	1.20	NaHJZ 150/100.787	509492	230, 50	145	120	69	1.83	50	0.39	EEI=A3	12	0.85
	150	HS, HI	1.80											20	0.77

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Ballasts for HS and HI Lamps 150 to 400 W

Shape: 71x75 mm

For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)  
 Vacuum-impregnated with polyester resin  
 Screw terminals: 0.75-2.5 mm<sup>2</sup>  
 Protection class I  
 tw 130  
 Ballasts for pulse ignition system on request

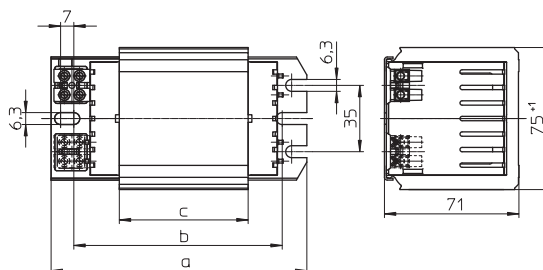

Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
250	HS, HI	3.00	NaHJ 250.741	<b>536147</b>	220, 50	135	115	68	2.85	70	0.42	A2	32	1.35
250	HS, HI	3.00	NaHJ 250.741	<b>536148</b>	230, 50	135	115	68	2.85	75	0.40	A2	32	1.30
250	HS, HI	3.00	NaHJ 250.741	<b>536149</b>	240, 50	135	115	68	2.85	75	0.39	A2	32	1.25
250	HS, HI	3.00	NaHJ 250.742	<b>536150</b>	220, 60	135	115	68	2.85	70	0.42	A2	25	1.40
400	HS, HI	4.45	NaHJ 400.743	<b>536142</b>	220, 50	165	145	103	4.1	70	0.45	A2	45	2.10
400	HS, HI	4.45	NaHJ 400.743	<b>535142</b>	230, 50	165	145	103	4.1	75	0.44	A2	45	2.00
400	HS, HI	4.45	NaHJ 400.743	<b>536143</b>	240, 50	165	145	103	4.1	75	0.40	A2	45	1.85
400	HS, HI	4.45	NaHJ 400.744	<b>536144</b>	220, 60	165	145	103	4.1	70	0.44	A2	40	2.05

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## With Thermal Cut-out

Thermal cut-out with automatic reset



Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
150	HS, HI	1.80	NaHJ 150.216	<b>543740</b>	230, 50	135	115	68	2.85	45	0.40	A2	20	0.77
250	HS, HI	3.00	NaHJ 250.741	<b>539274</b>	220, 50	135	115	68	2.85	70	0.42	A2	32	1.35
250	HS, HI	3.00	NaHJ 250.741	<b>544210</b>	230, 50	135	115	68	2.85	65	0.40	A2	32	1.30
250	HS, HI	3.00	NaHJ 250.741	<b>536151</b>	230, 50	135	115	68	2.85	75	0.40	A2	32	1.30
250	HS, HI	3.00	NaHJ 250.741	<b>537726</b>	230/240, 50	135	115	68	2.85	75	0.40	A2	32	1.30/1.25
250	HS, HI	3.00	NaHJ 250.741	<b>536152</b>	240, 50	135	115	68	2.85	75	0.39	A2	32	1.25
400	HS, HI	4.45	NaHJ 400.743	<b>548259</b>	220, 50	165	145	103	4.1	70	0.44	A2	45	2.10
400	HS, HI	4.45	NaHJ 400.743	<b>536145</b>	230, 50	165	145	103	4.1	75	0.44	A2	45	2.00
400	HS, HI	4.45	NaHJ 400.743	<b>538204</b>	230, 50	165	145	103	4.1	65	0.41	A2	45	2.00
400	HS, HI	4.45	NaHJ 400.743	<b>539209</b>	230/240, 50	165	145	103	4.1	75	0.41	A2	45	2.00/1.85
400	HS, HI	4.45	NaHJ 400.743	<b>543986</b>	240, 50	165	145	103	4.1	70	0.40	A2	45	1.85
400	HS, HI	4.45	NaHJ 400.743	<b>536146</b>	240, 50	165	145	103	4.1	75	0.40	A2	45	1.85
400	HS, HI	4.45	NaHJ 400.744	<b>538620</b>	220, 60	165	145	103	4.1	70	0.44	A2	40	2.05

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Ballasts for HS and HI Lamps 250 to 600 W

Shape: 92 x 102 mm

For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)  
 Vacuum-impregnated with polyester resin  
 Screw terminals: 0.75-2.5 mm<sup>2</sup>  
 Protection class I  
 tw 130  
 Ballasts for pulse ignition system on request

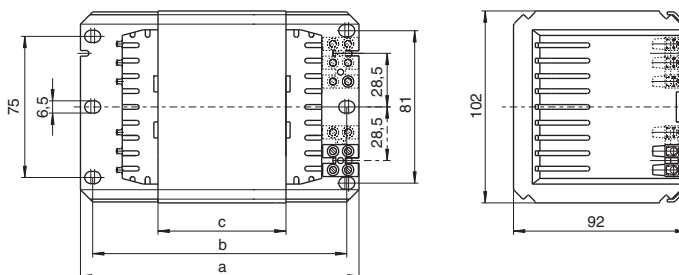

Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
250	HS, HI	3.00	NaHJ 250.003	<b>179743</b>	220, 50	133	120	44	3.53	70	0.41	EEI=A3	32	1.32
250	HS, HI	3.00	NaHJ 250.727	<b>178771</b>	230, 50	133	120	44	3.53	70	0.39	EEI=A3	32	1.26
250	HS, HI	3.00	NaHJ 250.727	<b>500976</b>	240, 50	133	120	44	3.53	70	0.39	EEI=A3	32	1.21
250	HS, HI	3.00	NaHJ 250.011	<b>500401</b>	220, 60	133	120	44	3.53	65	0.43	A2	25	1.35
400	HS, HI	4.45	NaHJ 400.006	<b>179740</b>	220, 50	148	135	68	5.20	70	0.44	A2	45	2.00
400	HS, HI	4.45	NaHJ 400.006	<b>178790</b>	230, 50	148	135	68	5.20	70	0.44	A2	45	1.95
400	HS, HI	4.45	NaHJ 400.737	<b>500402</b>	240, 50	148	135	68	5.20	75	0.43	A2	45	1.90
400	HS, HI	4.45	NaHJ 400.012	<b>500403</b>	220, 60	148	135	68	5.20	70	0.44	A2	40	2.00
400	HI	3.50	J 400.027	<b>505782</b>	230/240, 50	148	135	68	5.20	60	0.45	A2	35	1.64/1.59
600	HS	6.20	NaH 600.010	<b>179742</b>	220, 50	173	160	96	6.80	70	0.44	A2	65	2.90
600	HS	6.20	NaH 600.005	<b>533484</b>	230/240, 50	173	160	96	6.80	70	0.44	A2	65	2.90/2.85
600	HS	6.20	NaH 600.140	<b>529560</b>	220, 60	173	160	96	6.80	65	0.46	A2	55	3.00

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## With Thermal Cut-out

Thermal cut-out with automatic reset



Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
250	HS, HI	3.00	NaHJ 250.727	<b>500969</b>	230/240, 50	133	120	44	3.53	70	0.39	EEI=A3	32	1.26/1.21
250	HS, HI	3.00	NaHJ 250.011	<b>508744</b>	220, 60	133	120	44	3.46	65	0.43	A2	25	1.35
400	HS, HI	4.45	NaHJ 400.737	<b>179424</b>	230/240, 50	148	135	68	5.20	70/75	0.43	A2	45	1.95/1.90
400	HI	3.50	J 400.027	<b>509613</b>	230/240, 50	148	135	68	5.20	60	0.45	A2	35	1.64/1.59
400	HS, HI	4.45	NaHJ 400.012	<b>508741</b>	220, 60	148	135	68	5.20	70	0.44	A2	40	2.00
600	HS	6.20	NaH 600.005	<b>179454</b>	230/240, 50	173	160	96	6.80	70	0.44	A2	65	2.90/2.85

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Ballasts for HS and HI Lamps 1000 W

Shape: 92 x 102 mm

For high pressure sodium lamps (HS) and metal halide lamps (HI)  
 Vacuum-impregnated with polyester resin  
 Screw terminals: 0.75-2.5 mm<sup>2</sup>  
 Protection class I  
 tw 130  
 Ballasts for pulse ignition system on request

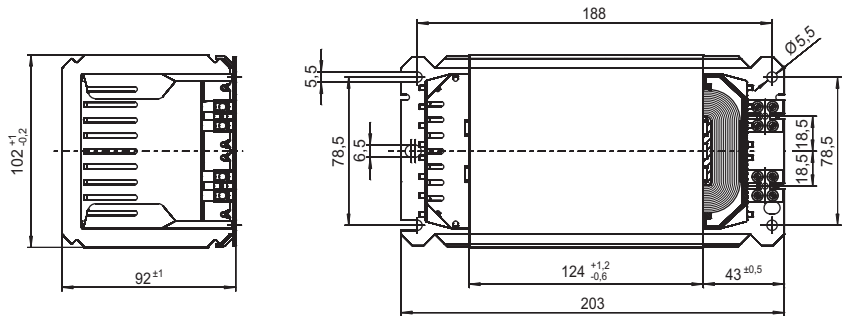


Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
1000	HS	10.30	NaHJ 1000.089	<b>534487</b>	220, 50	203	188	124	8.90	80	0.47	A2	100	5.1
	HI	9.50											85	5.0
1000	HS	10.30	NaHJ 1000.089	<b>539212</b>	220/230, 50	203	188	124	8.90	80	0.45	A2	100	5.1
	HI	9.50											85	5.0
1000	HS	10.30	NaHJ 1000.089	<b>528548</b>	230, 50	203	188	124	8.90	80	0.45	A2	100	5.1
	HI	9.50											85	5.0
1000	HS	10.30	NaHJ 1000.089	<b>544787</b>	230/240, 50	203	188	124	8.90	85	0.45	A2	100	5.1
	HI	9.50											85	5.0
1000	HS	10.30	NaHJ 1000.089	<b>536140</b>	240, 50	203	188	124	8.90	85	0.42	A2	100	4.8
	HI	9.50											85	4.9
1000	HS	10.30	NaHJ 1000.089	<b>528536</b>	220, 60	203	188	124	8.90	75	0.46	A2	100	5.1
	HI	9.50											85	5.0

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017


## Ballasts for HI Lamps up to 2500 W

Shape: 150x150 mm

For metal halide lamps (HI)  
 Vacuum impregnated with polyester resin  
 Screw terminals: 0.75-4 mm<sup>2</sup>  
 For luminaires of protection class I  
 tw 130



For Short Arc Lamps

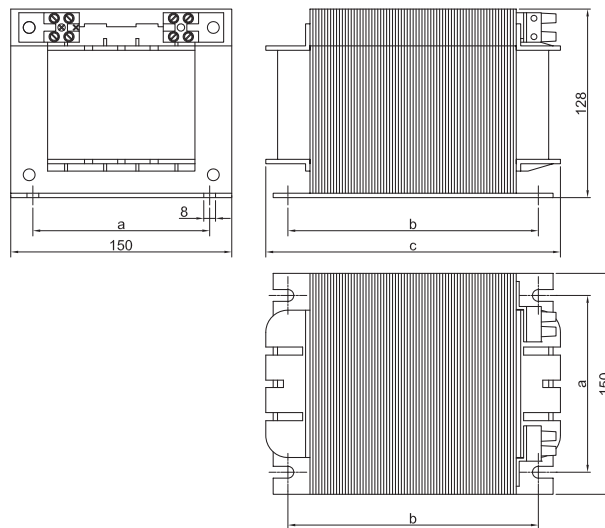





Lamp			Ballast										Capacitor		
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A	
new	2000	HI	8.8	J 2000.71	<b>554303</b>	380/400, 50	122	175	200	15	75	0.60	A2	37	6
new	2000	HI	8.8	J 2000.72	<b>554304</b>	380/400/415, 50	122	135	160	14	70	0.58	A2	37	6
new	2000	HI	8.8	J 2000.73	<b>554305</b>	380, 60	122	175	200	15	75	0.53	A2	30	6
new	2000	HI	10.3/11.3	JD 2000.81	<b>554270</b>	380/400, 50	122	175	200	15	80	0.53	A2	60	6
new	2000	HI	10.3/11.3	JD 2000.82	<b>554306</b>	380/400/415, 50	122	135	160	14	75	0.52	A2	60	6
new	2000	HI	10.3/11.3	JD 2000.83	<b>554283</b>	380, 60	122	175	200	15	75	0.54	A2	50	6
new	2000	HI	12.2	JD 2000II.91	<b>554307</b>	380/400, 50	122	175	200	16	80	0.46	A2	70	6
new	2000	HI	12.2	JD 2000II.92	<b>554308</b>	380, 60	122	175	200	16	75	0.45	A2	60	6
new	2000	HI	16.5	JD 2000I.85	<b>554309</b>	230/240, 50	122	135	160	14	80	0.57	A2	125	10.5
new	2000	HI	16.5	JD 2000I.86	<b>554310</b>	220, 60	122	135	160	14	80	0.57	A2	105	10
<b>For Short Arc Lamps 1200 and 2500 W</b>															
new	1200	HI	13.8	J 1200.95	<b>554311</b>	208, 60 230/245, 50	122	105	130	11	-	0.40	A2 A2	150	6
new	2500	HI	25.6	J 2500.96	<b>554312</b>	208, 60 230/245, 50	122	175	200	16	-	0.44	A2 A2	260	12.3

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Encapsulated Ballasts for HS Lamps 1000 W and HI Lamps 1000 and 2000 W


Shape: 108 x 114 mm

For high-pressure sodium vapour lamps (HS) and metal halide lamps (HI)  
 Corrosion-proof due to fully encapsulation of the ballast in an aluminium casing  
 Specifically designed for installation in pylons  
 Diverse mounting options  
 Screw terminals: 0.75-10 mm<sup>2</sup>  
 For luminaires of protection class I  
 Iw 130  
 With connection for protective earth conductor

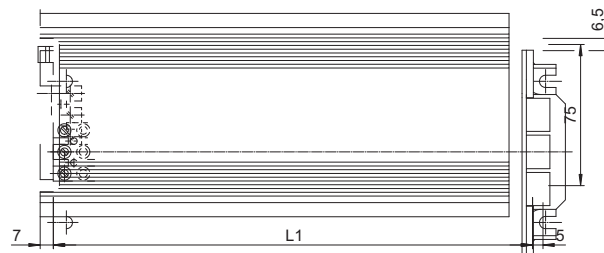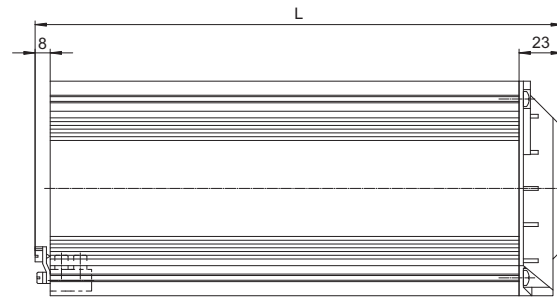

Lamp		Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	L mm	L1 mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	Cp μF	IN A
1000	HS	10.3	NaH 1000G.46	<b>531018</b>	230/240, 50	216	185	10.3	65	0.44	A2	100	5.1
1000	HI	9.5	J 1000G.41	<b>531017</b>	230/240, 50	216	185	10.2	70	0.48	A2	85	5.1
2000	HI	10.3	J 2000G.40	<b>531024</b>	380/400, 50	313	290	19.7	70	0.50	A2	60	6
2000	HI	8.8	J 2000G.42	<b>531021</b>	360/380/400, 50	261	235	13.8	90	0.62	A2	37	6

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017





## Ballasts for HM and HI Lamps 50 to 400 W

Shape: 53 x 66 mm




For mercury vapour lamps (HM) and metal halide lamps (HI) with ignition voltage 1 kV

Vacuum-impregnated with polyester resin

Screw terminals: 0.5-2.5 mm<sup>2</sup>

Protection class I

tw 130

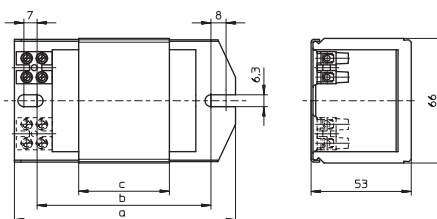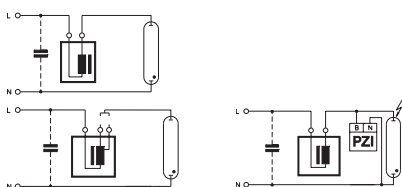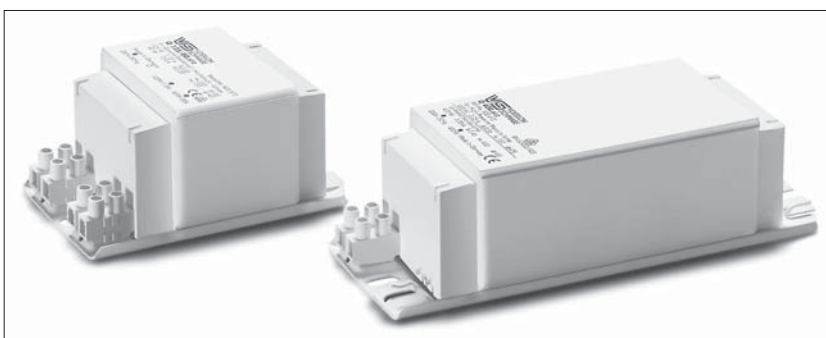

Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
50	HM	0.61	Q 50.501	<b>167100</b>	220, 50	108	86	36	1.07	55	0.44	EEL=A3	7	0.28
50	HM	0.61	Q 50.550	<b>167213</b>	230, 50	108	86	36	1.07	55	0.44	EEL=A3	7	0.27
50	HM	0.61	Q 50.508	<b>167125</b>	240, 50	108	86	36	1.07	65	0.42	EEL=A3	7	0.26
50	HM	0.61	Q 50.535	<b>167185</b>	220, 60	108	86	36	1.07	50	0.44	EEL=A3	6	0.28
50	HM	0.61	Q 80/50.596	<b>167311</b>	230, 50	108	86	36	1.07	55	0.43	EEL=A3	7	0.27
80	HM	0.80								70	0.51	EEL=A3	8	0.41
50	HM	0.61	Q 80/50.592	<b>167306</b>	220, 60	108	86	36	1.07	50	0.44	EEL=A3	6	0.28
80	HM	0.80								60	0.53	EEL=A3	7	0.43
80	HM	0.80	Q 80.587	<b>167302</b>	220, 50	108	86	36	1.07	65	0.52	EEL=A3	8	0.43
80	HM	0.80	Q 80.588	<b>167304</b>	230, 50	108	86	36	1.07	70	0.51	EEL=A3	8	0.41
80	HM	0.80	Q 80.510	<b>167132</b>	240, 50	108	86	36	1.07	60	0.48	EEL=A3	8	0.40
80	HM	0.80	Q 80.584	<b>167299</b>	220, 60	108	86	36	1.07	55	0.51	EEL=A3	7	0.43
80	HM	0.80	Q 125/80.611	<b>167326</b>	230, 50	108	86	42	1.23	50	0.49	EEL=A3	8	0.41
125	HM	1.15								70	0.54	EEL=A3	10	0.60
80	HM	0.80	Q 125/80.511	<b>167136</b>	240, 50	108	86	48	1.39	50	0.48	EEL=A3	8	0.40
125	HM	1.15								70	0.52	EEL=A3	10	0.58
125	HM	1.15	Q 125.549	<b>169947</b>	220, 50	108	86	36	1.07	70	0.56	EEL=A3	10	0.63
125	HM	1.15	Q 125.568	<b>167263</b>	230, 50	108	86	36	1.07	75	0.54	EEL=A3	10	0.60
125	HM	1.15	Q 125.512	<b>167140</b>	240, 50	108	86	48	1.39	65	0.51	EEL=A3	10	0.58
125	HM	1.15	Q 125.598	<b>502818</b>	220, 60	108	86	36	1.07	60	0.57	EEL=A3	10	0.65
250	HM	2.13	Q 250.513	<b>167144**</b>	220, 50	145	120	75	2.10	75	0.58	EEL=A3	18	1.26
250	HM	2.13	Q 250.528	<b>167367**</b>	230, 50	145	120	75	2.10	75	0.56	EEL=A3	18	1.20
250	HM	2.13	Q 250.703	<b>507256**</b>	240, 50	145	120	75	2.10	75	0.53	EEL=A3	18	1.15
250	HM	2.13	Q 250.606	<b>533705**</b>	220, 60	145	120	64	1.80	70	0.58	A2	15	1.30
400	HM	3.25	Q 400.616	<b>528236**</b>	220, 50	160	135	95	2.50	80	0.60	EEL=A3	25	2.00
400	HM	3.25	Q 400.561	<b>167250**</b>	220, 50	180	155	110	2.88	75	0.60	A2	25	2.00
400	HM	3.25	Q 400.612	<b>167330**</b>	230, 50	180	155	110	2.88	75	0.56	EEL=A3	25	1.90
400	HM	3.25	Q 400.669	<b>167374**</b>	240, 50	180	155	110	2.88	75	0.54	EEL=A3	25	1.85
400	HM	3.25	Q 400.613	<b>167335**</b>	220, 60	180	155	110	2.88	65	0.60	EEL=A3	25	2.00
400	HM	3.25	Q 400.613	<b>508245**</b>	220, 60	180	155	95	2.50	75	0.60	EEL=A3	25	2.00

\* Step 2: EEL = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017




\*\* Suitable for metal halide lamps (HI) with ignition voltage 1 kV in combination with pulse ignitor PZI 1000/1 K (see page 60)

## Ballasts with Thermal Cut-out for HM Lamps 50 to 125 W, Protection Class II

Encapsulated ballast in compact plastic casing  
Shape: 61x72 mm

For mercury vapour lamps (HM)  
With cable holder  
Thermal cut-out with automatic reset  
Screw terminals: 0.5-2.5 mm<sup>2</sup>

**Protection class II**  
tw 130

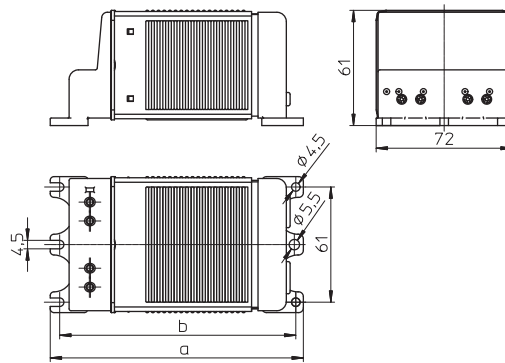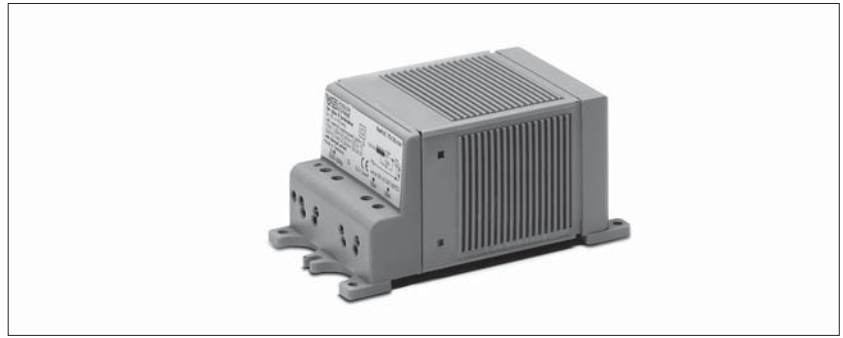

Lamp			Ballast									Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
50	HM	0.61	QZ 80/50.551	<b>533399</b>	230, 50	134	125	1.2	50	0.43	EEl=A3	7	0.27
80	HM	0.80							65	0.51	EEl=A3	8	0.41
80	HM	0.80	QZ 125/80.553	<b>533400</b>	230, 50	134	125	1.6	45	0.50	EEl=A3	8	0.41
125	HM	1.15							60	0.53	EEl=A3	10	0.60

\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

1

2

3

4

5

6

7

8

9

10

## Ballasts for HM and HI Lamps 250 and 400 W

Shape: 71x75 mm



For mercury vapour lamps (HM) and metal halide lamps (HI) with ignition voltage 1 kV

Vacuum-impregnated with polyester resin

Screw terminals: 0.75-2.5 mm<sup>2</sup>

Protection class I

tw 130

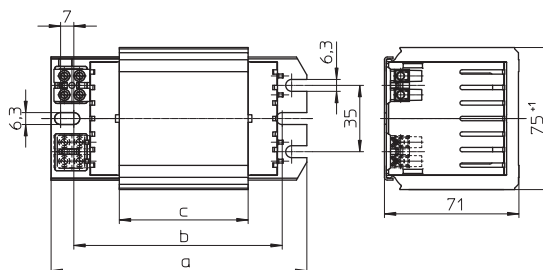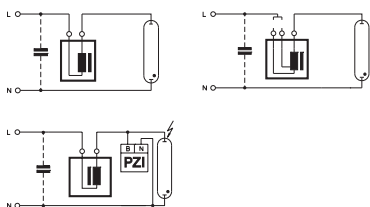

Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
250	HM	2.13	Q 250.800	<b>536260**</b>	230/240, 50	135	115	68	2.85	55	0.53	EEl=A3	18	1.3
400	HM	3.25	Q 400.715	<b>537869**</b>	220, 50	135	115	68	2.85	70	0.59	A2	25	2.0
400	HM	3.25	Q 400.801	<b>536258**</b>	230, 50	135	115	68	2.85	75	0.58	EEl=A3	25	2.0
400	HM	3.25	Q 400.801	<b>538034**</b>	230, 50	135	115	68	2.85	65	0.58	EEl=A3	25	2.0
400	HM	3.25	Q 400.801	<b>537703**</b>	230/240, 50	135	115	68	2.85	75	0.58	EEl=A3	25	2.0/1.85
400	HM	3.25	Q 400.732	<b>537873**</b>	220, 60	135	115	68	2.85	70	0.59	A2	25	2.0

\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

\*\* Suitable for metal halide lamps (HI) with ignition voltage 1 kV in combination with pulse ignitor PZI 1000/1 K (see page 60)

## With Thermal Cut-out

Thermal cut-out with automatic reset

Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A
250	HM	2.13	Q 250.800	<b>536261**</b>	230/240, 50	135	115	68	2.85	55	0.53	EEl=A3	18	1.3
400	HM	3.25	Q 400.801	<b>536259**</b>	230, 50	135	115	68	2.85	75	0.58	EEl=A3	25	2.0

\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

\*\* Suitable for metal halide lamps (HI) with ignition voltage 1 kV in combination with pulse ignitor PZI 1000/1 K (see page 60)

## Ballasts for HM and HI Lamps 250 to 1000 W

Shape: 92 x 102 mm





For mercury vapour lamps (HM) and metal halide lamps (HI) with ignition voltage 1 kV

Vacuum-impregnated with polyester resin

Screw terminals: 0.75-2.5 mm<sup>2</sup>

Protection class I

tw 130

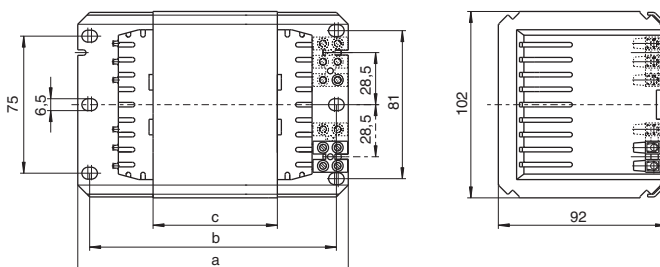

Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>P</sub> μF	I <sub>N</sub> A
250	HM	2.13	Q 250.417	<b>504467</b> **	230/240, 50	133	120	44	3.53	50	0.52	EEl=A3	18	1.20
400	HM	3.25	Q 400.001	<b>504474</b> **	230/240, 50	133	120	44	3.53	65	0.56	EEl=A3	25	1.80
700	HM	5.40	Q 700.035	<b>528521</b>	230/240, 50	173	160	96	6.90	60	0.56	EEl=A3	40	3.40
1000	HM	7.50	Q 1000.097	<b>537103</b> **	220, 50	173	160	96	6.90	75	0.61	EEl=A3	60	4.80
1000	HM	7.50	Q 1000.096	<b>538540</b> **	230, 50	173	160	96	6.90	65	0.60	EEl=A3	60	4.80
1000	HM	7.50	Q 1000.096	<b>528761</b> **	230, 50	173	160	96	6.90	65	0.60	EEl=A3	60	4.80
1000	HM	7.50	Q 1000.145	<b>528886</b> **	240, 50	173	160	96	6.90	75	0.58	EEl=A3	60	4.60
1000	HM	7.50	Q 1000.311	<b>526715</b> **	220, 60	173	160	96	6.90	70	0.61	EEl=A3	50	5.00

\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

\*\* Suitable for metal halide lamps (HI) with ignition voltage 1 kV in combination with pulse ignitor PZI 1000/1 K (see page 60)

## With Thermal Cut-out

Thermal cut-out with automatic reset


Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>P</sub> μF	I <sub>N</sub> A
250	HM	2.13	Q 250.417	<b>508746</b> **	230/240, 50	133	120	44	3.53	50	0.52	EEl=A3	18	1.20
400	HM	3.25	Q 400.001	<b>505002</b> **	230/240, 50	133	120	44	3.53	65	0.56	EEl=A3	25	1.80

\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

\*\* Suitable for metal halide lamps (HI) with ignition voltage 1 kV in combination with pulse ignitor PZI 1000/1 K (see page 60)

## Compact Power Reduction Kits for HS Lamps 50 to 150 W

Ballast shape: 53 x 66 mm

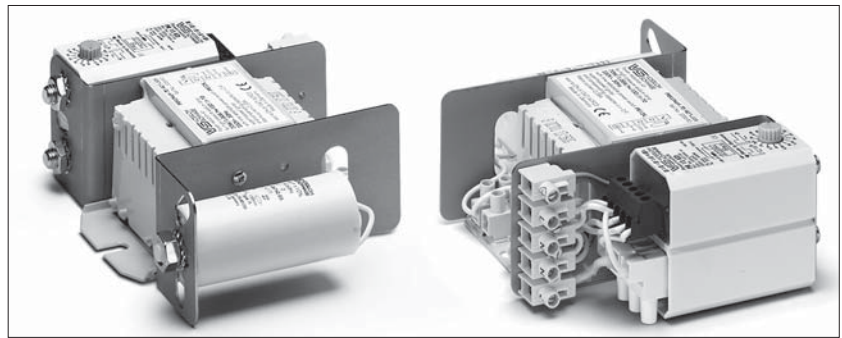

For high pressure sodium lamps (HS)  
Compact power reduction kit with ballast with or without patented, intelligent thermal cut-out with automatic reset (which evaluates the temperature and current of the ballast), ignitor, power switch and compensation capacitor

With luminaire terminal block:  
screw terminal 0.75-2.5 mm<sup>2</sup>

With earth terminal


Permissible load capacity: 20-100 pF

Lead length to the lamp: max. 1.5 m

tw 130

Further outputs and voltages on request

With digital timer ignitor on request

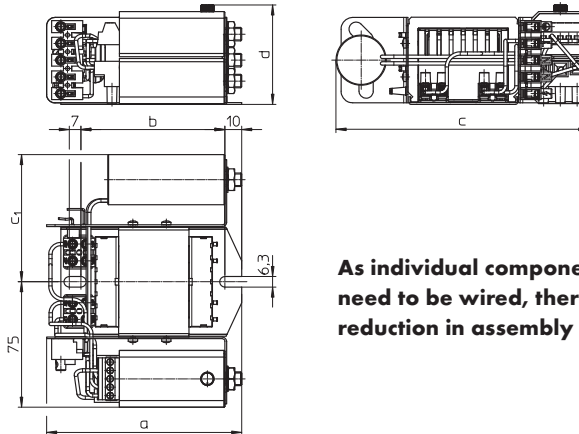

**As individual components no longer need to be wired, there is a significant reduction in assembly time and costs.**

Lamp			Power reduction kit													
Output	Type	Current	Type	Ref. No.	Voltage AC V, Hz	Mains current A	Temperature protection	a mm	b mm	c mm	c1 mm	d mm	Weight kg	Power factor λ	Energy efficiency*	
<b>Power reduction without control phase – Intelligent power switch PR 12 K LC (Light Control)</b>																
70/40%	HS	0.98	PRKUNaH 70/40%.525	<b>543384</b>	220, 50	0.38	no	117	86	151	76	60	1.5	> 0.90	EEI=A3	
100/40%	HS	1.20	PRKUNaH 100/40%.522	<b>543388</b>	220, 50	0.56	no	123	92	151	76	60	1.7	> 0.90	EEI=A3	
150/40%	HS	1.80	PRKUNaH 150/40%.142	<b>543385</b>	220, 50	0.77	no	151	120	154	79	60	2.3	> 0.90	EEI=A3	
50/40%	HS	0.76	PRKUNaH 50/40%.021	<b>544760</b>	230, 50	0.30	yes	117	86	151	76	56	1.5	> 0.90	EEI=A3	
70/40%	HS	0.98	PRKUNaH 70/40%.525	<b>543742</b>	230, 50	0.38	yes	117	86	151	76	60	1.5	> 0.90	EEI=A3	
100/40%	HS	1.20	PRKUNaH 100/40%.522	<b>543743</b>	230, 50	0.55	yes	123	92	151	76	60	1.7	> 0.90	EEI=A3	
150/40%	HS	1.80	PRKUNaH 150/40%.142	<b>543744</b>	230, 50	0.77	yes	151	120	154	79	60	2.3	> 0.90	EEI=A3	
<b>Power reduction without control phase – Power switch PR 12 KD with selectable switching time</b>																
70/40%	HS	0.98	PRKUNaH 70/40%.525	<b>539328</b>	220, 50	0.38	no	117	86	151	76	60	1.5	> 0.90	EEI=A3	
100/40%	HS	1.20	PRKUNaH 100/40%.522	<b>539330</b>	220, 50	0.56	no	123	92	151	76	60	1.7	> 0.90	EEI=A3	
150/40%	HS	1.80	PRKUNaH 150/40%.142	<b>539332</b>	220, 50	0.77	no	151	120	154	79	60	2.3	> 0.90	EEI=A3	
70/40%	HS	0.98	PRKUNaH 70/40%.525	<b>538690</b>	230, 50	0.38	yes	117	86	151	76	60	1.5	> 0.90	EEI=A3	
100/40%	HS	1.20	PRKUNaH 100/40%.522	<b>538691</b>	230, 50	0.56	yes	123	92	151	76	60	1.7	> 0.90	EEI=A3	
150/40%	HS	1.80	PRKUNaH 150/40%.142	<b>538692</b>	230, 50	0.77	yes	151	120	154	79	60	2.3	> 0.90	EEI=A3	
70/40%	HS	0.98	PRKUNaH 70/40%.525	<b>538700</b>	220, 60	0.38	no	117	86	151	76	60	1.5	> 0.90	EEI=A3	
100/40%	HS	1.20	PRKUNaH 100/40%.522	<b>538701</b>	220, 60	0.56	no	123	92	151	76	60	1.7	> 0.90	EEI=A3	
150/40%	HS	1.80	PRKUNaH 150/40%.142	<b>538702</b>	220, 60	0.77	no	151	120	154	79	60	2.3	> 0.90	EEI=A3	
<b>Power reduction with control phase – Power switch PU 12 K</b>																
70/40%	HS	0.98	PRKUNaH 70/40%.525	<b>539329</b>	220, 50	0.38	no	117	86	151	76	56	1.5	> 0.90	EEI=A3	
100/40%	HS	1.20	PRKUNaH 100/40%.522	<b>539331</b>	220, 50	0.56	no	123	92	151	76	56	1.7	> 0.90	EEI=A3	
150/40%	HS	1.80	PRKUNaH 150/40%.142	<b>539333</b>	220, 50	0.77	no	151	120	154	79	56	2.3	> 0.90	EEI=A3	
70/40%	HS	0.98	PRKUNaH 70/40%.525	<b>538695</b>	230, 50	0.38	yes	117	86	151	76	56	1.5	> 0.90	EEI=A3	
100/40%	HS	1.20	PRKUNaH 100/40%.522	<b>538696</b>	230, 50	0.56	yes	123	92	151	76	56	1.7	> 0.90	EEI=A3	
150/40%	HS	1.80	PRKUNaH 150/40%.142	<b>538697</b>	230, 50	0.77	yes	151	120	154	79	56	2.3	> 0.90	EEI=A3	
70/40%	HS	0.98	PRKUNaH 70/40%.525	<b>538705</b>	220, 60	0.38	no	117	86	151	76	56	1.5	> 0.90	EEI=A3	
100/40%	HS	1.20	PRKUNaH 100/40%.522	<b>538706</b>	220, 60	0.56	no	123	92	151	76	56	1.7	> 0.90	EEI=A3	
150/40%	HS	1.80	PRKUNaH 150/40%.142	<b>538707</b>	220, 60	0.77	no	151	120	154	79	56	2.3	> 0.90	EEI=A3	

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Compact Power Reduction Kits for HS Lamps 250 and 400 W

Ballast shape: 71x75 mm

For high pressure sodium lamps (HS)  
Compact power reduction kit with ballast with or without thermal cut-out with automatic reset, superimposed ignitor, power switch and compensation capacitor

With luminaire terminal block:

screw terminal 0.75-2.5 mm<sup>2</sup>

With earth terminal



Permissible load capacity: 20-100 pF

Lead length to the lamp: max. 1.5 m

tw 130

Further outputs and voltages on request

With digital timer ignitor on request

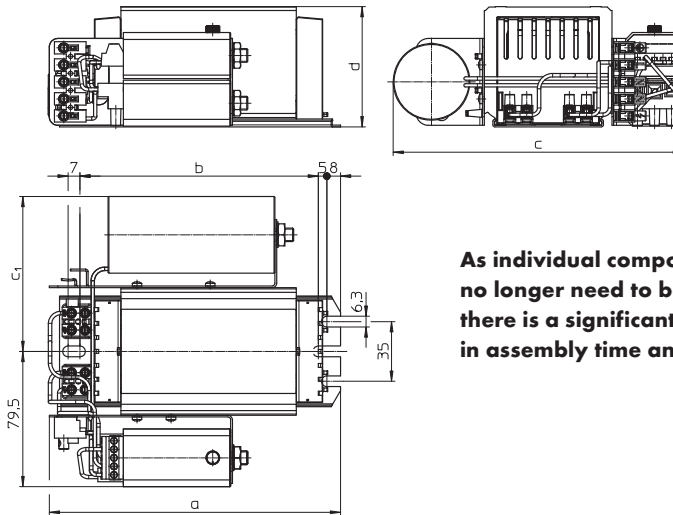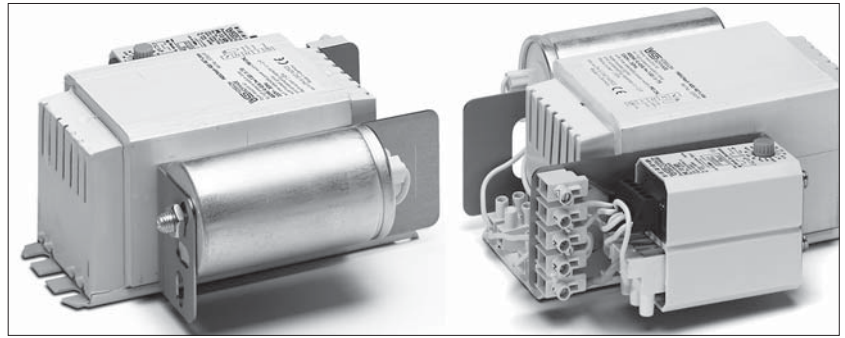

As individual components no longer need to be wired, there is a significant reduction in assembly time and costs.




Lamp			Power reduction kit												
Output	Type	Current	Type	Ref. No.	Voltage AC	Mains current	Temperature protection	a	b	c	c1	d	Weight	Power factor	Energy efficiency*
W		A			V, Hz	A		mm	mm	mm	mm	mm	kg	λ	
<b>Power reduction without control phase – Intelligent power switch PR 12 K LC (Light Control)</b>															
250/40%	HS	3.00	PRKUNaH 250/40%.936	<b>543386</b>	220, 50	1.26	no	141	110	171	91	71	3.3	> 0.90	EEl=A3
400/40%	HS	4.45	PRKUNaH 400/40%.906	<b>543389</b>	220, 50	1.95	no	171	140	171	91	71	5.3	> 0.90	A2
250/40%	HS	3.00	PRKUNaH 250/40%.936	<b>543745</b>	230, 50	1.26	yes	141	110	171	91	71	3.3	> 0.90	EEl=A3
400/40%	HS	4.45	PRKUNaH 400/40%.906	<b>543746</b>	230, 50	1.95	yes	171	140	171	91	71	5.3	> 0.90	A2
<b>Power reduction without control phase – Power switch PR 12 KD with selectable switching time</b>															
250/40%	HS	3.00	PRKUNaH 250/40%.758	<b>546585</b>	220, 50	1.26	no	171	140	171	91	71	5.3	> 0.90	EEl=A3
250/40%	HS	3.00	PRKUNaH 250/40%.936	<b>539334</b>	220, 50	1.26	no	141	110	171	91	71	3.3	> 0.90	EEl=A3
400/40%	HS	4.45	PRKUNaH 400/40%.906	<b>539335</b>	220, 50	1.95	no	171	140	171	91	71	5.3	> 0.90	A2
250/40%	HS	3.00	PRKUNaH 250/40%.936	<b>538693</b>	230, 50	1.26	yes	141	110	171	91	71	3.3	> 0.90	EEl=A3
400/40%	HS	4.45	PRKUNaH 400/40%.906	<b>538694</b>	230, 50	1.95	yes	171	140	171	91	71	5.3	> 0.90	A2
250/40%	HS	3.00	PRKUNaH 250/40%.983	<b>538703</b>	220, 60	1.26	no	141	110	165	86	71	3.3	> 0.90	EEl=A3
400/40%	HS	4.45	PRKUNaH 400/40%.937	<b>538704</b>	220, 60	1.95	no	171	140	171	91	71	5.3	> 0.90	A2
<b>Power reduction with control phase – Power switch PU 12 K</b>															
250/40%	HS	3.00	PRKUNaH 250/40%.936	<b>539336</b>	220, 50	1.26	no	141	110	171	91	71	3.3	> 0.90	EEl=A3
400/40%	HS	4.45	PRKUNaH 400/40%.906	<b>539337</b>	220, 50	1.95	no	171	140	171	91	71	5.3	> 0.90	A2
250/40%	HS	3.00	PRKUNaH 250/40%.936	<b>538698</b>	230, 50	1.26	yes	141	110	171	91	71	3.3	> 0.90	EEl=A3
400/40%	HS	4.45	PRKUNaH 400/40%.906	<b>538699</b>	230, 50	1.95	yes	171	140	171	91	71	5.3	> 0.90	A2
250/40%	HS	3.00	PRKUNaH 250/40%.983	<b>538708</b>	220, 60	1.26	no	141	110	165	86	71	3.3	> 0.90	EEl=A3
400/40%	HS	4.45	PRKUNaH 400/40%.937	<b>538709</b>	220, 60	1.95	no	171	140	171	91	71	5.3	> 0.90	A2

\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Ballasts for Power Reduction of HS Lamps 70 to 250 W

Shape: 53 x 66 mm

For high pressure sodium lamps (HS)  
 Vacuum-impregnated with polyester resin  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Protection class I  
 tw 130

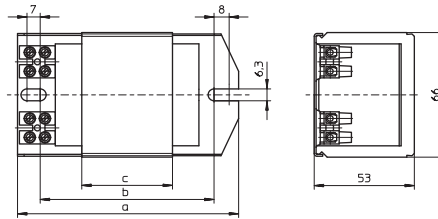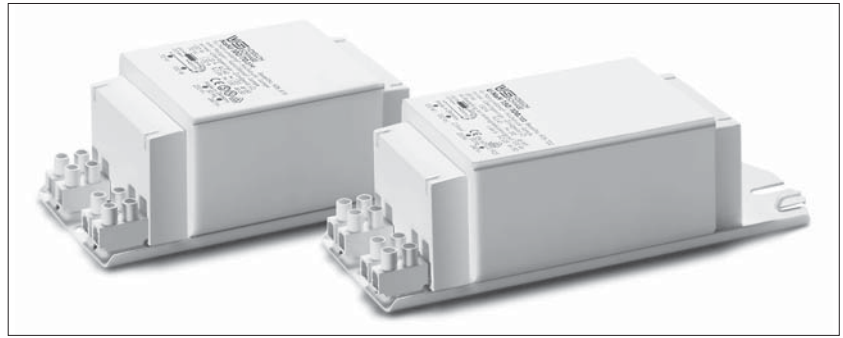

Lamp		Ballast											Capacitor	
Output W	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>P</sub> μF	I <sub>N</sub> A	
70 (42)	0.98	UNaH 70/40%.501	<b>534128</b>	220, 50	108	86	42	1.23	65	0.39	EEl=A3	12	0.40	
70 (42)	0.98	UNaH 70/40%.525	<b>535348</b>	230, 50	108	86	42	1.23	70	0.38	EEl=A3	12	0.38	
70 (42)	0.98	UNaH 70/40%.691	<b>161460</b>	220, 60	108	86	48	1.39	60	0.42	EEl=A3	10	0.40	
100 (60)	1.20	UNaH 100/40%.452	<b>533947</b>	220, 50	117	92	55	1.52	65	0.43	EEl=A3	12	0.55	
100 (60)	1.20	UNaH 100/40%.522	<b>535347</b>	230, 50	117	92	55	1.52	70	0.42	EEl=A3	12	0.55	
100 (60)	1.20	NaHJ 100/70.709	<b>161471</b>	220, 60	145	120	55	1.55	60/50	0.44	EEl=A3	10	0.57	
150 (90)	1.80	UNaH 150/40%.453	<b>533948</b>	220, 50	145	120	75	2.03	75	0.42	EEl=A3	20	0.80	
150 (90)	1.80	UNaH 150/40%.142	<b>535333</b>	230, 50	145	120	75	2.03	75	0.40	EEl=A3	20	0.77	
150 (90)	1.80	UNaH 150/40%.717	<b>161475</b>	220, 60	145	120	75	2.03	70	0.44	EEl=A3	20	0.77	
250 (150)	3.00	UNaH 250/40%.454	<b>533949</b>	220, 50	180	155	110	2.88	80	0.42	EEl=A3	32	1.32	
250 (150)	3.00	UNaH 250/40%.983	<b>169892</b>	220, 60	145	120	75	2.03	75	0.40	EEl=A3	32	1.32	



\* Step 2: EEl = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017




## Ballasts with Thermal Cut-out for Power Reduction of HS Lamps 50 to 150 W

Shape: 53x66 mm


For high pressure sodium lamps (HS)  
 Vacuum-impregnated with polyester resin  
 Thermal cut-out with automatic reset  
 Protection class I  
 tw 130

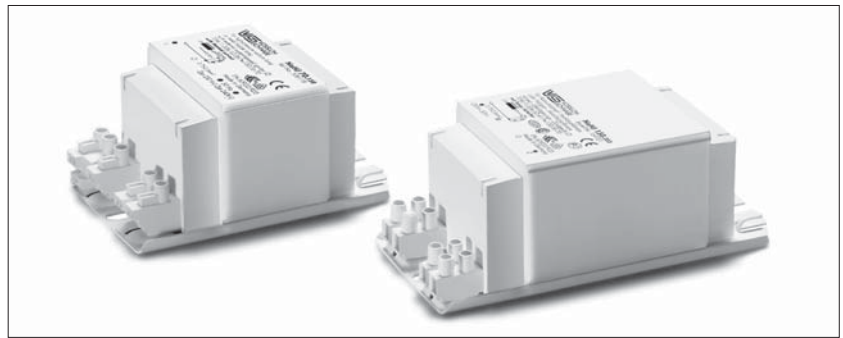

**A** Push-in terminals: 0.5–1.5 mm<sup>2</sup>

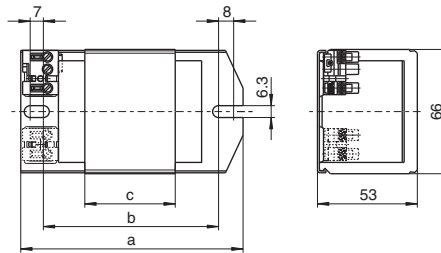


**B** Screw terminals: 0.5–2.5 mm<sup>2</sup>

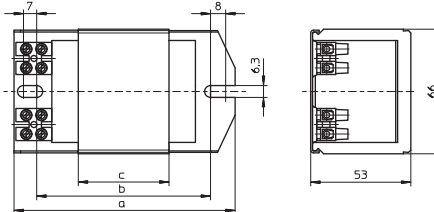


Lamp		Ballast											Capacitor	
Output W	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	c mm	Drawing	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>P</sub> μF	I <sub>N</sub> A
<b>With push-in terminals: 0.5–1.5 mm<sup>2</sup></b>														
70 (42)	0.98	UNaH 70/40%.525	<b>544728</b>	230, 50	108	86	42	A	1.23	70	0.38	EEl=A3	12	0.38
100 (60)	1.20	UNaH 100/40%.522	<b>544730</b>	230, 50	117	92	55	A	1.55	70	0.42	EEl=A3	12	0.55
150 (90)	1.80	UNaH 150/40%.142	<b>544729</b>	230, 50	145	120	75	A	2.10	75	0.40	EEl=A3	20	0.77
150 (101)	1.80	UNaH 150/100.722	<b>539050</b>	230/240, 50	160	135	95	A	2.50	65/50	0.41	EEl=A3	20	0.77
150 (101)	1.80	UNaH 150/100.722	<b>507627</b>	230/240, 50	180	155	95	A	2.50	65/50	0.41	EEl=A3	20	0.77
<b>With screw terminals: 0.5–2.5 mm<sup>2</sup></b>														
50 (33)	0.76	NaH 50/35.797	<b>539515</b>	230, 50	108	86	36	B	1.07	70/45	0.37	EEl=A3	6	0.22
70 (44)	0.98	NaHJ 70/50.695	<b>503136</b>	230, 50	108	86	48	B	1.34	70/50	0.37	EEl=A3	12	0.38
100 (64)	1.20	NaHJ 100/70.703	<b>504131</b>	230, 50	117	92	55	B	1.55	70/60	0.43	EEl=A3	12	0.55
150 (101)	1.80	NaHJ 150/100.973	<b>504135</b>	230, 50	145	120	75	B	2.10	75/55	0.41	EEl=A3/A2	20	0.77

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017





## Ballasts with Thermal Cut-out for Power Reduction of HS Lamps 70 to 150 W, Protection Class II

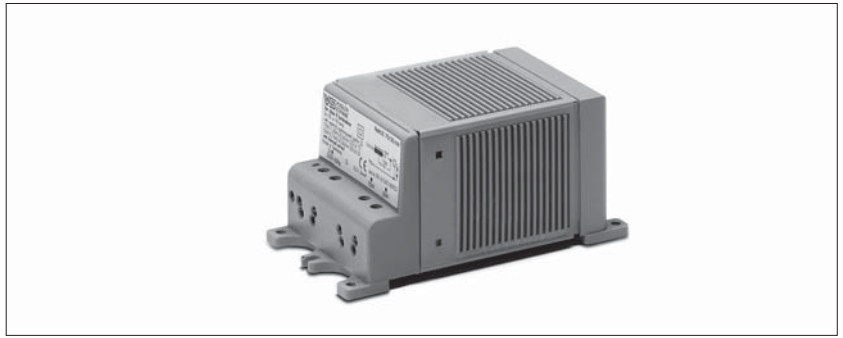

**Encapsulated ballast in compact plastic casing**  
**Shape: 61x72 mm**

For high pressure sodium lamps (HS)  
 With cable holder  
 Thermal cut-out with automatic reset  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>

**Protection class II**  
 Iw 130

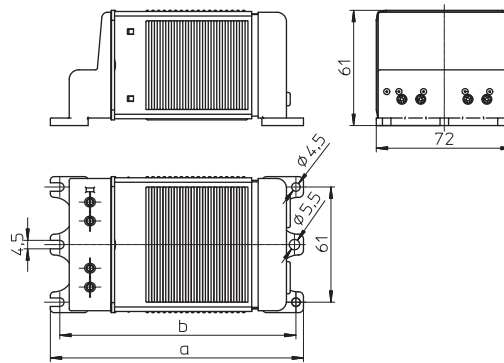





Lamp			Ballast										Capacitor	
Output W	Type	Current A	Type	Ref. No.	Voltage AC V, Hz	a mm	b mm	Weight kg	Δt K	Power factor λ	Energy efficiency*	C <sub>p</sub> μF	I <sub>N</sub> A	
70 (44)	HS	0.98	NaHJZ 70/50.520	<b>533395</b>	230, 50	134	125	1.60	65/45	0.36	EEI=A3	12	0.38	
100 (64)	HS	1.20	NaHJZ 100/70.519	<b>533396</b>	230, 50	161	152	2.10	60/45	0.42	EEI=A3	12	0.55	
150 (101)	HS	1.80	NaHJZ 150/100.466	<b>533398</b>	230, 50	161	152	2.30	70/45	0.39	EEI=A3	20	0.77	

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## Ballasts for Power Reduction of HS Lamps 250 to 600 W

Shape: 71x75 mm  
Shape: 92x102 mm

For high pressure sodium lamps (HS)  
Vacuum-impregnated with polyester resin  
Screw terminals: 0.75-2.5 mm<sup>2</sup>  
Protection class I  
tw 130

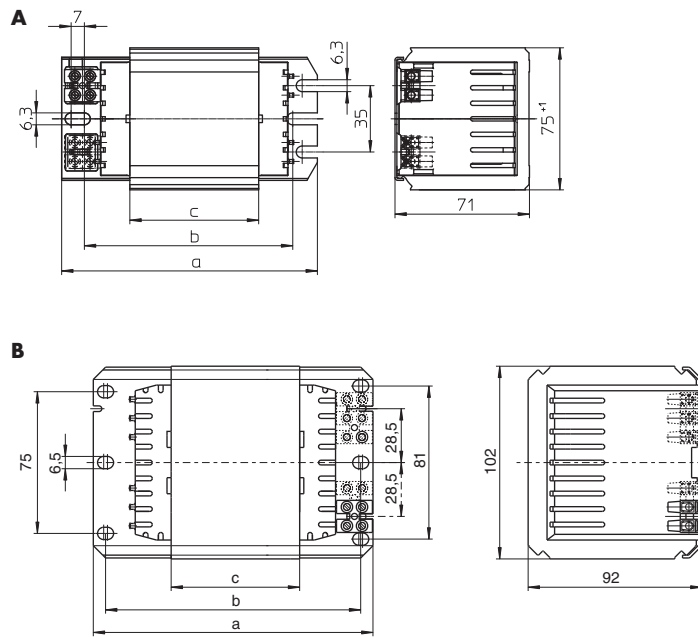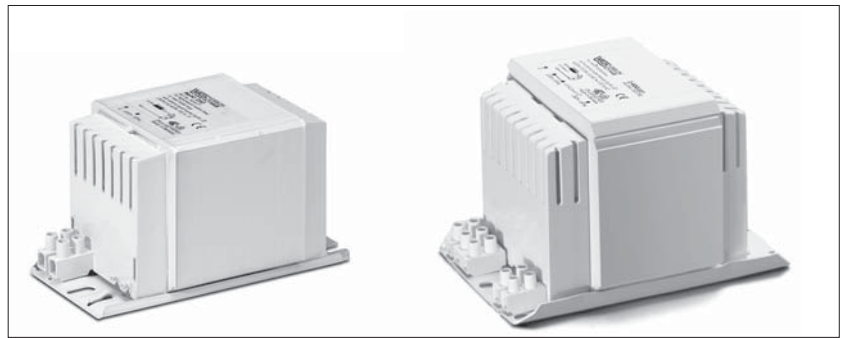

Lamp			Ballast											Capacitor	
Output	Type	Current	Type	Ref. No.	Voltage AC	Drawing	a	b	c	Weight	Δt	Power factor	Energy efficiency*	C <sub>P</sub>	I <sub>N</sub>
W		A			V, Hz		mm	mm	mm	kg	K	λ		μF	A
250 (150)	HS	3.00	UNaH 250/40%.746	<b>539283</b>	220, 50	A	135	115	68	2.85	75	0.42	EEI=A3	32	1.35
250 (150)	HS	3.00	UNaH 250/40%.936	<b>543747</b>	230, 50	A	135	115	68	2.85	75	0.40	EEI=A3	32	1.30
250 (150)	HS	3.00	UNaH 250/40%.747	<b>539517</b>	220, 60	A	135	115	68	2.85	75	0.42	EEI=A3	25	1.40
400 (240)	HS	4.45	UNaH 400/40%.892	<b>538592</b>	220, 50	A	165	145	103	4.13	75	0.44	A2	45	2.10
400 (240)	HS	4.45	UNaH 400/40%.906	<b>543748</b>	230, 50	A	165	145	103	4.13	75	0.42	A2	45	2.00
400 (240)	HS	4.45	UNaH 400/40%.937	<b>538715</b>	220, 60	A	165	145	103	4.13	75	0.44	A2	40	2.05
600 (360)	HS	6.20	UNaH 600/40%.060	<b>539384</b>	230/240, 50	B	173	160	108	6.80	75	0.44	A2	75	2.80

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017


## With Thermal Cut-out

Thermal cut-out with automatic reset

Lamp			Ballast											Capacitor	
Output	Type	Current	Type	Ref. No.	Voltage AC	Drawing	a	b	c	Weight	Δt	Power factor	Energy efficiency*	C <sub>P</sub>	I <sub>N</sub>
W		A			V, Hz		mm	mm	mm	kg	K	λ		μF	A
250 (150)	HS	3.00	UNaH 250/40%.936	<b>538711</b>	230, 50	A	135	115	68	2.85	75	0.40	EEI=A3	32	1.30
400 (240)	HS	4.45	UNaH 400/40%.906	<b>538710</b>	230, 50	A	165	145	103	4.13	75	0.42	A2	45	2.00

\* Step 2: EEI = A3, minimum EU energy efficiency requirements as of 2012 | Step 3: A2, minimum EU energy efficiency requirements as of 2017

## SUPERIMPOSED, PULSE AND INSTANT RESTRIKE

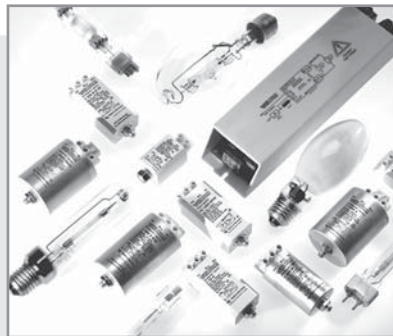

## ELECTRONIC IGNITORS

### **Superimposed ignitors**

Superimposed ignitors work independently of ballasts and generate defined ignition pulses during every half-wave within the stipulated voltage ranges. As the mains frequency only plays a subordinate role, these systems work equally well at 50 Hz and 60 Hz.

Superimposed ignitors should be mounted near the lampholder. The clearance needed between the ignitor and the lamp is determined by the respective maximum load capacitance, which is specified for each ignitor in the technical details. The capacitive load of the cable is dependent on its physical properties and wiring layout; this value usually ranges between 70-100 pF per metre.

### **Pulse ignitors**

As pulse ignitors use the winding of an inductive ballast to generate the requisite pulse voltage, such ballasts must be designed to withstand these high ignition voltages.

### **Instant restrike ignitors**

Instant restrike ignitors are a special type of ignitor for high-pressure discharge lamps. In comparison to superimposed and pulse ignitors, instant restrike ignitors have a very specified field of application. However, safety-relevant lighting systems, e.g. in power plants, stadiums, but also in television studios, make instant re-ignition of hot high-pressure discharge lamps necessary.


On the following pages, Vossloh-Schwabe presents an extensive range of ignitors for all areas of application.




<b>Electronic superimposed ignitors</b>	<b>50–58</b>
<b>Pulse ignitors</b>	<b>59–60</b>
<b>Instant restrike ignitors</b>	<b>61–62</b>
<b>Electronic power switches</b>	<b>63</b>
<b>Electronic superimposed ignitors with power switch</b>	<b>64</b>
<b>Switch units for electronic operating devices with 1–10 V interface</b>	<b>65</b>
<b>Start-up switches</b>	<b>66–67</b>
<b>Electronic discharge units</b>	<b>68</b>
<b>Technical details for discharge lamps</b>	<b>89–131</b>
General technical details	394–401
Glossary	402–404

## Electronic Superimposed Ignitors for HS Lamps up to 70 W


Standard version or with automatic switch-off  
 For high pressure sodium lamps (HS) and ceramic discharge lamps C-HI-TT/ET with base E27  
 Phasing of the ignition voltage:  
 60-90 °el and 240-270 °el  
 Max. permitted casing temperature: 105 °C  
 Fastening: male nipple with pre-assembled washer and nut  
 For luminaires of protection class I and II

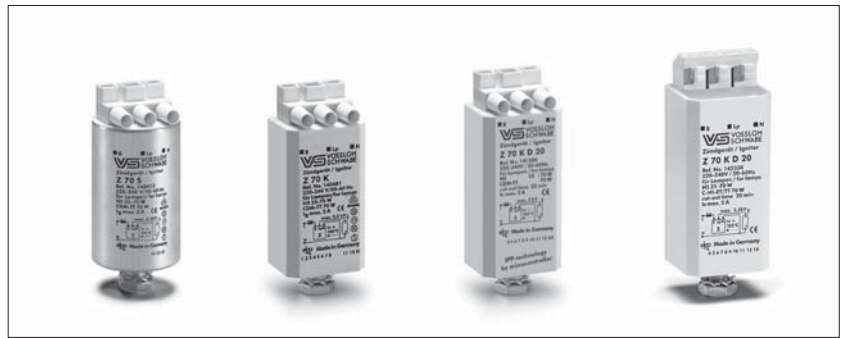


**Al casing**

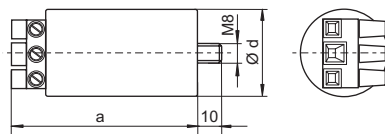


**PC casing – K**

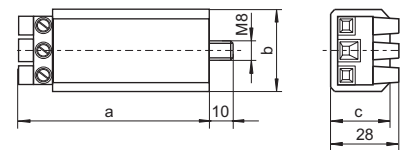

**PC casing – K D20**

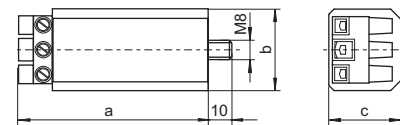

**PC casing – with push-in terminals**

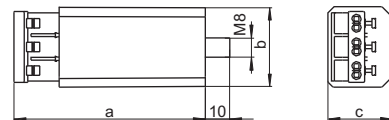

Type	Ref. No.	Voltage AC 50-60 Hz V	Max. lamp A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Casing			Weight g	
									d (Ø) mm	a mm	b mm		c mm
<b>Aluminium casing (Al) with screw terminals: 0.75-4 mm<sup>2</sup></b>													
Z 70 S	140413	220-240	2	< 0.6	< 5	1.8-2.3	20-200	-	35	76	-	-	135
<b>Plastic casing (PC) with screw terminals: 0.75-4 mm<sup>2</sup></b>													
Z 70 K	140481	220-240	2	< 0.6	< 5	1.8-2.3	20-200	-	-	78	34	27	125
Z 70 K D20	141580*	220-240	2	< 0.6	< 5	1.8-2.3	20-200	1216/50-60	-	80	34	30	145
<b>Plastic casing (PC) with push-in terminals: 0.5-2.5 mm<sup>2</sup></b>													
Z 70 K	142320	220-240	2	< 0.6	< 5	1.8-2.3	20-200	-	-	81	34	27	125
Z 70 K D20	142330*	220-240	2	< 0.6	< 5	1.8-2.3	20-200	1216/50-60	-	83	34	30	145


\* With IPP technology

## Electronic Superimposed Ignitors for HS Lamps 70 (DE) to 250 W and HI Lamps 35 to 250 W


Standard version or with automatic switch-off  
 For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)  
 Phasing of the ignition voltage: 60-90 °el and 240-270 °el  
 Max. permitted casing temperature: 105 °C  
 Fastening: male nipple with pre-assembled washer and nut  
 For luminaires of protection class I and II




Al casing

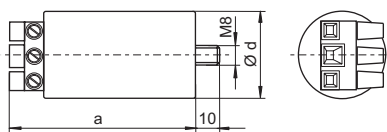


PC casing – K

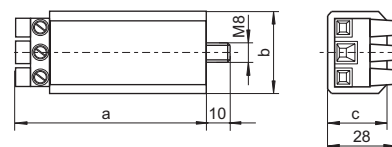

PC casing – K D20

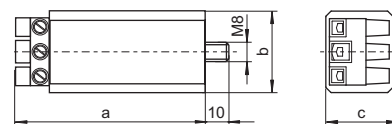

PC casing – with push-in terminals

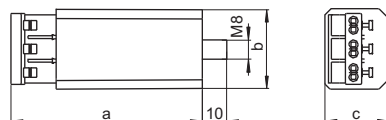


Type	Ref. No.	Voltage AC 50-60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Casing			Weight g	
									d (Ø) mm	a mm	b mm		c mm
<b>Aluminium casing (Al) with screw terminals: 0.75-4 mm<sup>2</sup></b>													
Z 250 S	140425	220-240	3.5	< 1.8	< 20	4-5	20-100	-	35	76	-	-	140
<b>Plastic casing (PC) with screw terminals: 0.75-4 mm<sup>2</sup></b>													
Z 250 K	140489	220-240	3.5	< 1.8	< 20	4-5	20-100	-	-	78	34	27	130
Z 250 K D20	141581*	220-240	3.5	< 1.8	< 20	4-5	20-100	1216/50-60	-	80	34	30	145
<b>Plastic casing (PC) with push-in terminals: 0.5-2.5 mm<sup>2</sup></b>													
Z 250 K	142340	220-240	3.5	< 1.8	< 20	4-5	20-100	-	-	81	34	27	130
Z 250 K D20*	142350*	220-240	3.5	< 1.8	< 20	4-5	20-100	1216/50-60	-	83	34	30	145

\* With IPP technology




## Electronic Superimposed Ignitors for HS Lamps 70 (DE) to 400 W and HI Lamps 35 to 400 W

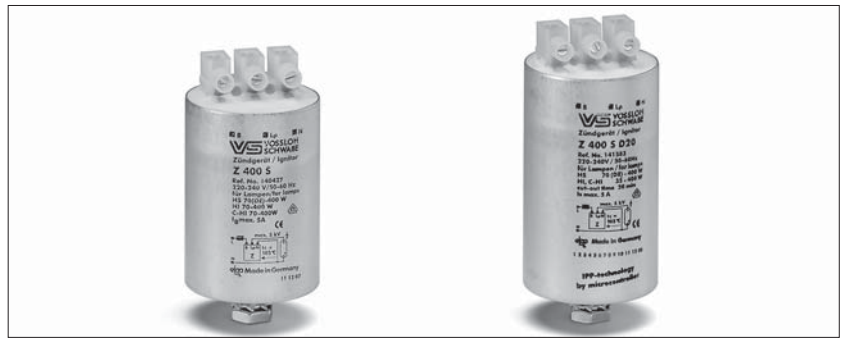

Standard version or with automatic switch-off  
 For high pressure sodium lamps (HS),  
 metal halide lamps (HI) and  
 ceramic discharge lamps (C-HI)  
 Phasing of the ignition voltage:  
 60-90 °el and 240-270 °el  
 Max. permitted casing temperature: 105 °C  
 Screw terminals: 0.75-4 mm<sup>2</sup>  
 Fastening: male nipple with pre-assembled  
 washer and nut  
 For luminaires of protection class I and II

Al casing

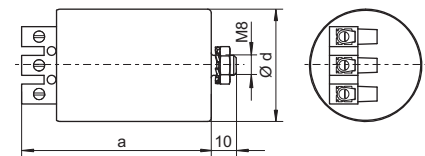

Type	Ref. No.	Voltage AC 50-60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Casing			Weight g	
									d (Ø) mm	a mm	b mm		c mm
<b>Aluminium casing (Al)</b>													
Z 400 S	<b>140427</b>	220-240	5	< 3	< 25	4-5	20-100	-	45	76	-	-	250
Z 400 S D20	<b>141583*</b>	220-240	5	< 3	< 25	4-5	20-100	1216/50-60	45	90	-	-	280

\* With IPP technology

## Electronic Superimposed Ignitors for HS Lamps 70 (DE) to 400 W and HI Lamps 35 to 400 W

Standard version or with automatic switch-off Compact shape

For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)

Ignition voltage: 4-5 kV

Phasing of the ignition voltage: 60-90 °el and 240-270 °el


Max. permitted casing temperature: 105 °C

Fastening: male nipple with pre-assembled washer and nut


For luminaires of protection class I and II

For luminaires of protection class I


(140594, 147707)

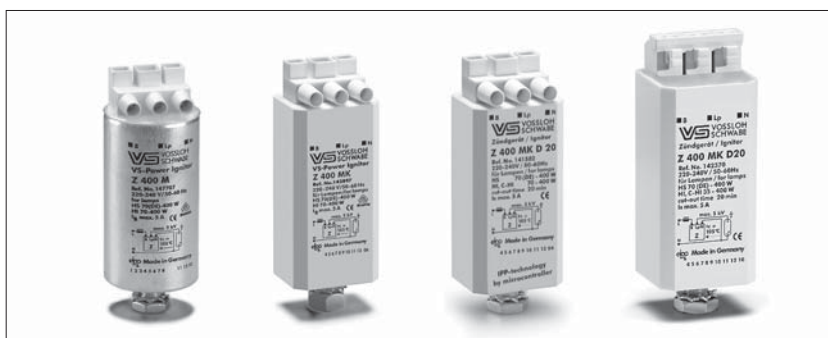


Al casing

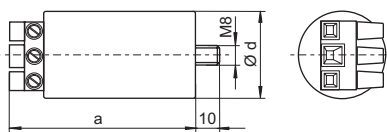


PC casing – K

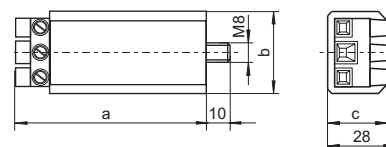

PC casing – K D20

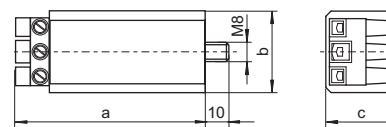

PC casing – with push-in terminals

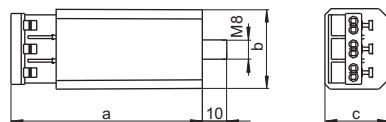

Type	Ref. No.	Voltage AC 50-60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Casing d (Ø) mm	a mm	b mm	c mm	Weight g
<b>Aluminium casing (Al) with screw terminals: 0.75-4 mm<sup>2</sup></b>													
Z 400 M	140594	220-240	5	< 3	< 35	4-5	20-50	-	35	76	-	-	140
Z 400 M VS-Power	147707**	220-240	5	< 3	< 35	4-5	20-50	-	35	76	-	-	140
Z 400 M S	140693	220-240	5	< 3	< 35	4-5	20-50	-	35	76	-	-	140
<b>Plastic casing (PC) with screw terminals: 0.75-4 mm<sup>2</sup></b>													
Z 400 M K	140597	220-240	5	< 3	< 35	4-5	20-50	-	-	78	34	27	130
Z 400 M K VS-Power	142897**	220-240	5	< 3	< 35	4-5	20-50	-	-	78	34	27	130
Z 400 M K D20	141582*	220-240	5	< 3	< 35	4-5	20-50	1216/50-60	-	80	34	30	145
<b>Plastic casing (PC) with push-in terminals: 0.5-2.5 mm<sup>2</sup></b>													
Z 400 M K	142360	220-240	5	< 3	< 35	4-5	20-50	-	-	81	34	27	130
Z 400 M K VS-Power	142361**	220-240	5	< 3	< 35	4-5	20-50	-	-	81	34	27	130
Z 400 M K D20	142370*	220-240	5	< 3	< 35	4-5	20-50	1216/50-60	-	83	34	30	145

Recommended for outdoor lighting

\* With IPP technology

\*\* Not suitable for C-HI lamps

## Electronic Superimposed Ignitors for HS Lamps 600 and 750 W



Standard version

For high pressure sodium lamps (HS)

Phasing of the ignition voltage:

60-90 °el and 240-270 °el


Max. permitted casing temperature: 105 °C

Screw terminals: 0.75-4 mm<sup>2</sup>

Fastening: male nipple with pre-assembled washer and nut

For luminaires of protection class I and II


**Al casing**

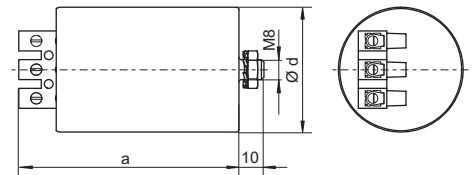


Type	Ref. No.	Voltage AC 50 - 60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Casing			Weight g	
									d (Ø) mm	a mm	b mm		c mm
<b>Aluminium casing (Al)</b>													
Z 750 S	<b>146990</b>	220 - 240	8	< 3	< 20	4 - 5	20 - 100	-	50	90	-	-	360

## Electronic Superimposed Ignitors for HS and HI Lamps 250 to 1000 W


Standard version or with automatic switch-off  
 For high pressure sodium lamps (HS) and metal halide lamps (HI)  
 Phasing of the ignition voltage: 60-90 °el and 240-270 °el  
 Max. permitted casing temperature: 105 °C  
 Screw terminals: 0.75-2.5 mm<sup>2</sup> (Z 1000 S: 0.75-4 mm<sup>2</sup>)  
 Fastening: male nipple with pre-assembled washer and nut  
 For luminaires of protection class I and II

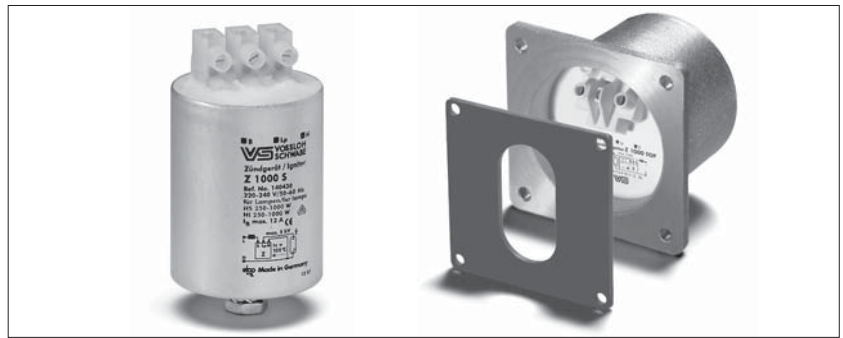


Al casing

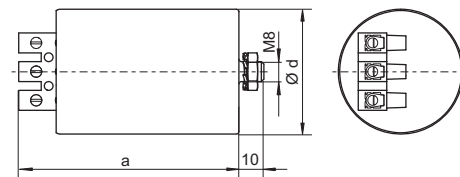

Al casing - D20

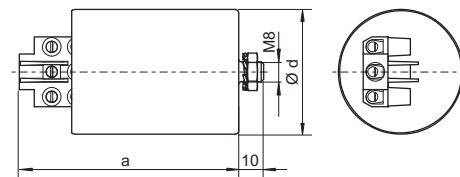

Z 1000 TOP

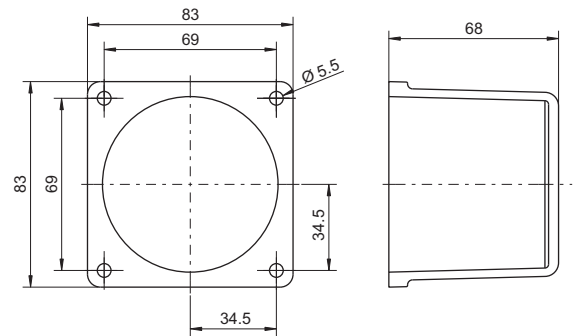


Type	Ref. No.	Voltage AC 50-60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Casing			Weight g	
									d (Ø) mm	a mm	b mm		c mm
<b>Aluminium casing (Al)</b>													
Z 1000 S	140430	220-240	12	< 6	< 35	4-5	20-100	-	50	80	-	-	340
Z 1000 TOP	140607**	220-240	12	< 6	< 35	4-5	20-100	-	-	83	83	68	620
Z 1000 S D20	141584*	220-240	12	< 6	< 35	4-5	20-100	1216/50-60	50	89	-	-	340

\* With IPP technology

\*\* For flange-mounting with gasket for degree of protection IP55

## Electronic Superimposed Ignitors for HS and HI Lamps up to 1000 W

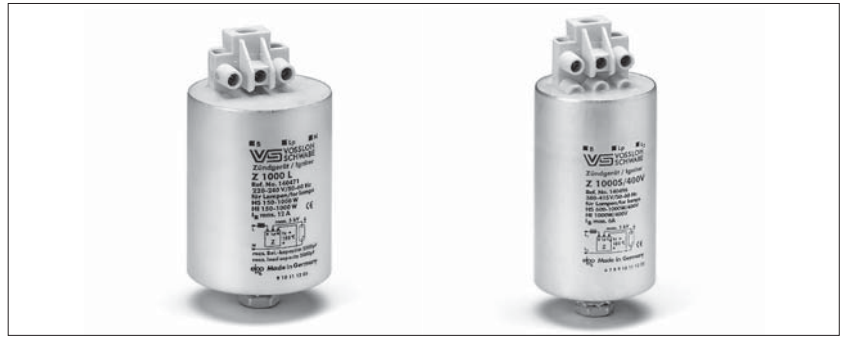

Standard version

For high pressure sodium lamps (HS)

and metal halide lamps (HI)


**For long lead lengths**

Max. permitted casing temperature: 105 °C

Screw terminals: 0.75–2.5 mm<sup>2</sup>

Fastening: male nipple with pre-assembled washer and nut

**Al casing**

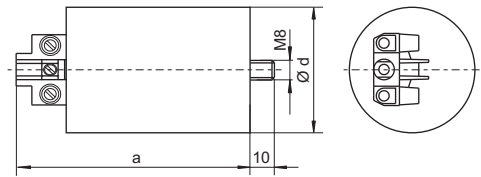

**For HS and HI lamps 150 to 1000 W**

Phasing of the ignition voltage: 60–90 °el

For luminaires of protection class I

Type	Ref. No.	Voltage AC 50–60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Casing				Weight g
									d (Ø) mm	a mm	b mm	c mm	
<b>Aluminium casing (Al)</b>													
Z 1000 L	140471 *	220–240	12	< 6	< 35	4–5	20–2000	–	50	97	–	–	340

\* Not suitable for HI lamps types NDL, WDL or for HS lamps types S, de-Luxe, Comfort or similar

**For HS lamps 600 to 1000 W/400 V  
and HI lamps 1000 W/400 V**

Phasing of the ignition voltage:

60–90 °el and 240–270 °el

For luminaires of protection class I and II

Type	Ref. No.	Voltage AC 50–60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Casing				Weight g
									d (Ø) mm	a mm	b mm	c mm	
<b>Aluminium casing (Al)</b>													
Z 1000 S/400 V	140496	380–415	6	< 3.3	< 28	4–5	20–2000	–	45	100	–	–	295

## Electronic Superimposed Ignitors for Projection Lamps up to 1200 W

Standard version

For high-pressure discharge lamps

Phasing of the ignition voltage:

60-90 °el and 240-270 °el

Max. permitted casing temperature: 105 °C


Screw terminals: 0.75-2.5 mm<sup>2</sup>

Fastening: male nipple with pre-assembled washer and nut

For luminaires of protection class I



Al casing

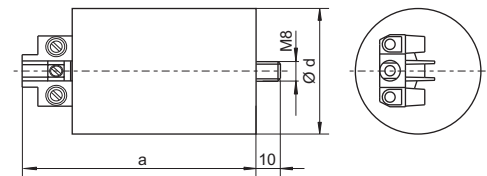

Type	Ref. No.	Voltage AC 50-60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Casing				Weight g
									d (Ø) mm	a mm	b mm	c mm	
<b>Aluminium casing (Al)</b>													
Z 1200/2.5	<b>140608*</b>	220-240	15	< 7.5	< 40	2-2.5	20-200	-	50	87	-	-	330
Z 1200/9	<b>140609**</b>	220-240	15	< 10	< 40	7-8	20-50	-	50	135	-	-	650

\* For lamps, e.g. HSR, MSR, SN

\*\* For lamps, e.g. HMI, HTI, CDI, RSI, CSR

## Electronic Superimposed Ignitors for HI Lamps up to 3500 W

Standard version

For metal halide lamps (HI)

Phasing of the ignition voltage:


60-90 °el and 240-270 °el

Max. permitted casing temperature: 105 °C

Screw terminals: 0.75-2.5 mm<sup>2</sup>

Fastening: male nipple with pre-assembled washer and nut

For luminaires of protection class I and II

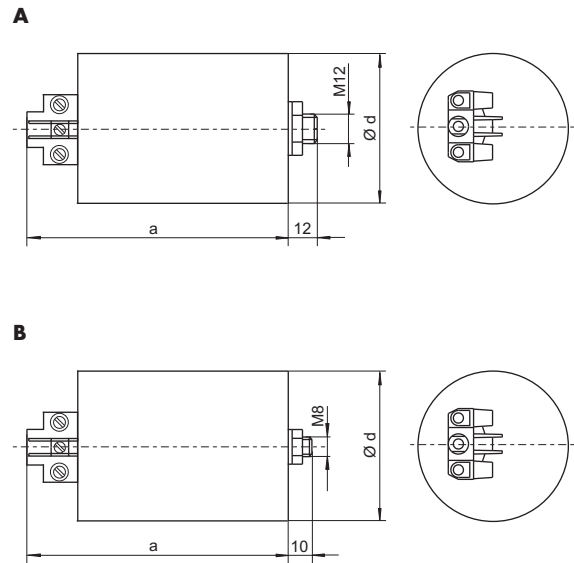

Type	Ref. No.	Voltage AC 50-60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Drawing	Casing			Weight g	
										d (Ø) mm	a mm	b mm		c mm
<b>Aluminium casing (Al)</b>														
Z 2000 S	<b>140432</b>	220-240	20	< 6	< 30	4-5	20-100	-	A	65	96	-	-	640
Z 2000 S/400 V	<b>140497</b>	380-415	12	< 5	< 32	4-5	20-2000	-	B	50	98	-	-	340
Z 3500 S/400 V	<b>140499</b>	380-415	20	< 7	< 35	4-5	20-100	-	A	65	96	-	-	650



## Pulse Ignitors for HS and HI Lamps up to 1000 W

With automatic switch-off

For high pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)

Max. permitted casing temperature: 95 °C

Screw terminals: 0.75-2.5 mm<sup>2</sup>


Fastening: male nipple with pre-assembled washer and nut

For luminaires of protection class I


This pulse ignitor is only for use with ballasts that have a dedicated tapping, as this determines the size of the ignition voltage.



Al casing

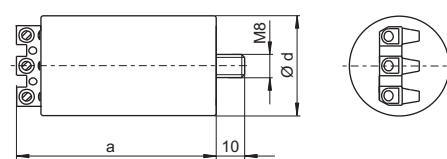

PC casing

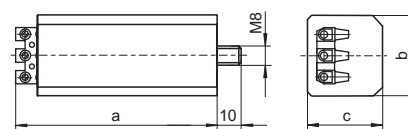

**For HS lamps 50 to 1000 W, HI lamps 35 to 1000 W and C-HI lamps 35 to 400 W**

Type	Ref. No.	Voltage AC 50-60 Hz V	Number of ignition pulses per mains period	Ignition voltage kV	Load capacity pF	Programmed switch-off time sec./Hz	Casing			Weight g
							a mm	b mm	c mm	
<b>Plastic casing (PC)</b>										
PZ 1000 K D20	142784*	220-240 ±10%	≥ 2	1.8-2.3/4-5	20-1000	1216/50-60	74	34	27	100

With IPP technology

\* Suitable ballasts (type: NaHJ...PZT) are available on request

**For HS lamps 600 to 1000 W/400 V and HI lamps 1000 W/400 V**

Type	Ref. No.	Voltage AC 50-60 Hz V	Number of ignition pulses per mains period	Ignition voltage kV	Load capacity pF	Programmed switch-off time sec./Hz	Casing				Weight g
							d (Ø) mm	a mm	b mm	c mm	
<b>Aluminium casing (Al)</b>											
PZ 1000/400 V A5	142783*	380-420	≥ 1	4-5	20-800	300/50	40	80	-	-	155

\* Suitable ballasts (type: NaHJ...PZT) are available on request

## Pulse Ignitors for HS Lamps 50 to 1000 W

Standard version



For standard high pressure sodium lamps (HS)

Max. permitted casing temperature: 95 °C

Screw terminals: 0.5-1.5 mm<sup>2</sup>

Fastening: male nipple with pre-assembled washer and nut

For luminaires of protection class I

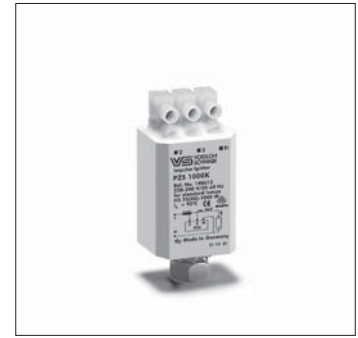

Type	Ref. No.	Voltage AC 50-60 Hz V	Number of ignition pulses per mains period	Ignition voltage kV	Load capacity pF	Programmed switch-off time sec.	Casing				Weight g
							d (∅) mm	a mm	b mm	c mm	

### Plastic casing (PC)

PZS 1000 K	<b>140613</b>	220-240	approx. 1/sec.	approx. 4	20-4000	–	–	50	28	27	50
------------	---------------	---------	----------------	-----------	---------	---	---	----	----	----	----

Not suitable for HS lamps types Plus, Super, XL, HO

Suitable ballasts (type: NaH...P) are available on request

## Pulse Ignitors for HI Lamps 250 to 2000 W, Ignition Voltage up to 1 kV

Standard version

For metal halide lamps (HI)


with ignition voltage of 0.9 kV

Max. permitted casing temperature: 95 °C

Screw terminals: 0.5-2.5 mm<sup>2</sup>

Fastening: male nipple with pre-assembled washer and nut

For luminaires of protection class I



Type	Ref. No.	Voltage AC 50-60 Hz V	Number of ignition pulses per mains period	Ignition voltage kV	Load capacity pF	Programmed switch-off time sec.	Casing			Weight g
							a mm	b mm	c mm	

### Plastic casing (PC)

PZI 1000/1 K	<b>140617</b>	220-240	≥ 1	0.7-0.9	max. 10000	–	57	28	27	50
--------------	---------------	---------	-----	---------	------------	---	----	----	----	----

Suitable ballasts see page 38, 40 und 41

## Instant Restrike Ignitors for High-pressure Discharge Lamps up to 600 W


For high pressure sodium lamps (HS), metal halide lamps (HI), ceramic discharge lamps (C-HI) and projection lamps in accordance with the lamp table shown below  
For installation as a symmetric ignition device (whereby the ignition voltage is split equally over both lamp electrodes)

For installation in luminaires of protection class I  
Max. permitted ambient temperature  $t_a$ : 60 °C  
Mains connection: screw terminal 3-poles, 0.75-2.5 mm<sup>2</sup>

Lamp connection: screw terminal 0.75-2.5 mm<sup>2</sup> for circuit 1 and 2

Fastening: 2 mounting slots for screws M4


Material: plastic casing made of ABS

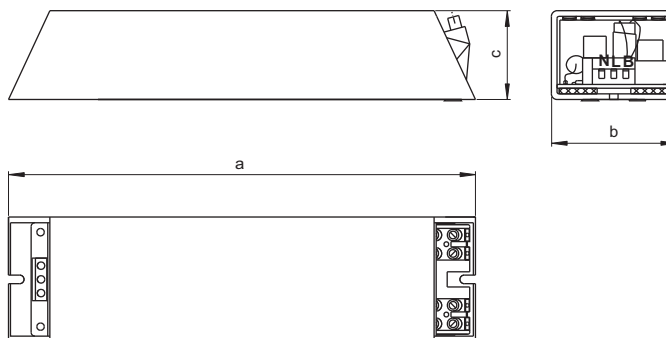


### CAUTION

Defective lamps must be replaced immediately

**Circuit 1**

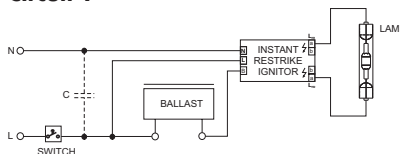

**Circuit 2**

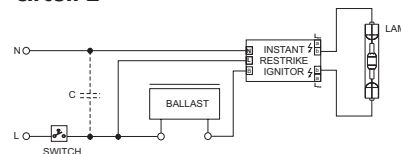


Type	Ref. No.	Voltage AC 50-60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage* kV	Ignition time sec.	Load capacity pF	Casing			Weight g
									a mm	b mm	c mm	
HZ 600 K	<b>147790</b>	230 ±10%	8	< 4	< 10	20-30	approx. 6	5-30	247	66	47	1000

\* Depending on the respective circuit, the ignition voltage is split equally over both lamp electrodes

Lamp table						
Circuit 1				Circuit 2		
Lamp type	Base	VS lampholder type	Catalogue page	Lamp type	Base	VS lampholder type
CDM-TD 70 W	RX7s	306	86	HBO 50 W	SFa8-2	-
HCI-TS 70 W	RX7s	306	86	MSR 125 HR	GZX9.5	-
HI 70 W (DE)	RX7s	306	86	HBO 200 W	SFc10.4	-
HS 70 W (DE)	RX7s	306	86	HBO 200 W	SFc10.4	-
RCI-TS 70 W	RX7s	306	86	MSR 200 HR	GZX9.5	-
HS 150 W (DE)	RX7s	306	86	HTI 250 W	FaX1.5	-
HMI 200 W	X515	-		HMI 400 W/SE	GZZ9.5	-
HMI 200 W/X	GZY9.5	-		HMP 400 W	FaX1.5	-
MSI 200 W	GZY9.5	-		HTI 400 W	FaX1.5	-
RSI 200 W	X515	-		RSI 400 W	GZX9.5	-
HS 250 W (DE)	Fc2	025	86-87	HBO 500 W	SFcY13-5	-
HS 400 W (DE)	Fc2	025	86-87	HMP 575 W	SFc10.4 / G22	-
MSR 400 HR	GZZ9.5	-		HMI 575 W	SFc10.4	-
MSI 575 W	SFc10	-		RSI 575 W	G22	-
MSR 575 HR	G22	-		HTI 600 W	FaX1.5	-

## Instant Restrike Ignitors for High-pressure Discharge Lamps 1000 W/230 V and 2000 W/400 V

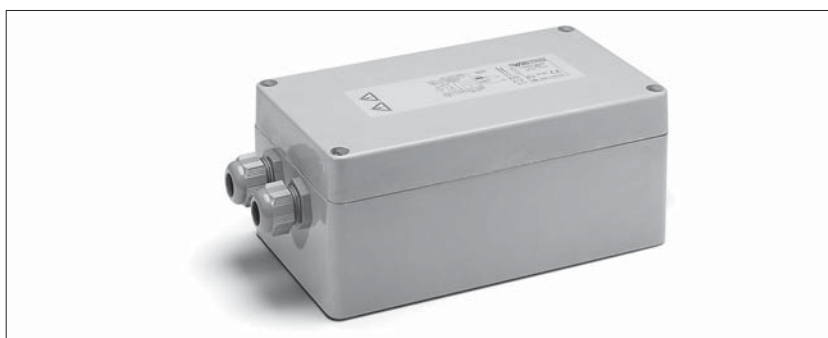

For high pressure sodium lamps (HS), metal halide lamps (HI), ceramic discharge lamps (C-HI) in accordance with the lamp table shown below  
For installation as a symmetric ignition device (whereby the ignition voltage is split equally over both lamp electrodes)

Degree of protection: IP65

For installation in luminaires of protection class I

Max. permitted ambient temperature  $t_a$ : 60 °C


Mains connection: screw terminal 3-poles, max. 4 mm<sup>2</sup>

Earth connection: screw terminal max. 4 mm<sup>2</sup>


Lamp connection: screw terminal max. 4 mm<sup>2</sup>

Fastening: 4 holes Ø 6.3 mm in the base of casing


Material: casing made of fibreglass-reinforced polyester

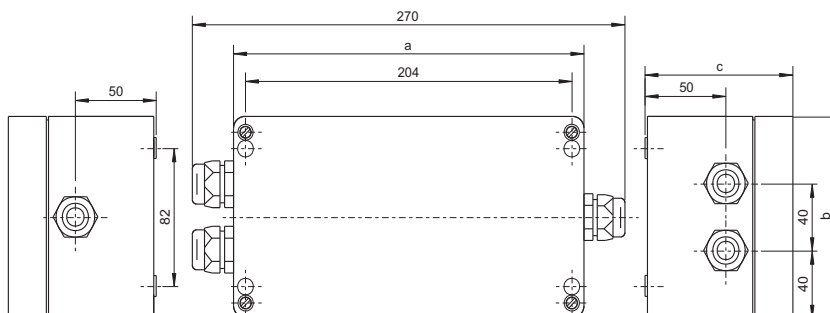

**Circuit diagram HZ 1000 K/230V**

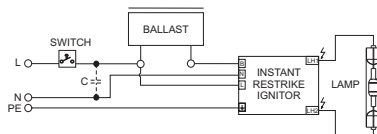

**Circuit diagram HZ 2000 K/400 V**

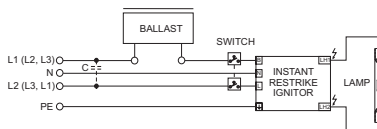

### CAUTION

Defective lamps must be replaced immediately

Type	Ref. No.	Voltage AC 50-60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage* kV	Ignition time sec.	Load capacity pF	Casing			Weight g
									a mm	b mm	c mm	
HZ 1000 K	<b>147791</b>	230 ±10%	12	< 5	< 10	36	approx. 6	5-50	218	120	92	3745
HZ 2000 K/400 V	<b>147793</b>	400 ±10%	12	< 5	< 10	36	approx. 6	5-30	218	120	92	3745

\* The ignition voltage is split equally over both lamp electrodes

### Lamp table HZ 1000 K

Lamp type	Lamp manufacturer	Base	VS lampholder type	Catalogue page	Lamp type	Base	VS lampholder type	Catalogue page
CDM-TD 150 W	Philips	RX7s	306	86	HI 400 W (DE)	Fc2	025	86-87
HCI-TS 150 W	Osram	RX7s	306	86	HS 400 W (DE)	Fc2	025	86-87
HI 150 W (DE)		RX7s	306	86	HI 1000 W (DE)	Fc2	025	86-87
HS 150 W (DE)		RX7s	306	86	HS 1000 W (DE)	Cable, K12s-7	211	88
HI 250 W (DE)		Fc2	025	86-87	-	-	-	-
HS 250 W (DE)		Fc2	025	86-87	-	-	-	-

### Lamp table HZ 2000 K/400 V


Lamp type	Base	VS lampholder type	Catalogue page	Note
HI 2000 W (DE)	Cable, K12s-7	211	88	not suitable for HRI-TS 2000 W/N/L, HQI-TS 2000 W/N/L

## Electronic Power Switches for HS Lamps up to 600 W and HM Lamps up to 700 W




For high pressure sodium lamps (HS) and mercury vapour lamps (HM)  
 For power reduction by using ballasts with multiple voltage tapping and superimposed ignitors  
 PR 12 K LC and PR 12 K D are also suitable for power switching of LED drivers and electronic ballasts.  
 Casing: PC  
 Max. permitted casing temperature  $t_c$ : 80 °C  
 Screw terminals: 0.75–2.5 mm<sup>2</sup>  
 Fastening: male nipple with pre-assembled washer and nut  
 For luminaires of protection class I and II  
 Circuit diagrams for power reduction see pages 106–107.


**PU 12 K/PR 12 KD/PR 12 K LC**



**PU 120 K**

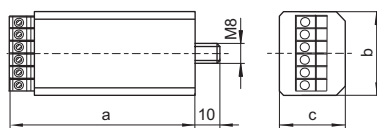

**PU 121 K**

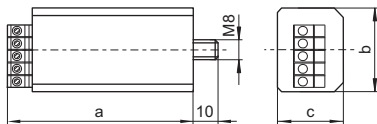

### Advantages of PR 12 K LC

- intelligent, auto-adaptive concept
- eliminates the time-consuming task of continually adjusting the times of power-reduced operation to suit constantly changing day-night cycles
- removes the need for making adjustments due to daylight-saving times
- easy programming via dial
- no additional control line necessary
- optimal suitable for the supplementary integration into existing luminaires
- suitable for luminaires of protection class I and II

Type	Ref. No.	Voltage AC V, Hz	Max. contact current		Inherent heating K	Integrated delay switching	Control phase for power reduction (circuitry logic)	Casing			Weight g
			A	λ				a mm	b mm	c mm	
<b>Power reduction with control phase</b>											
PU 12 K	<b>140621</b>	230, 50 / 220, 60	8/0.5	12/1	< 25	–	disconnect or connect	74	34	27	100
PU 120 K	<b>140622*</b>	230, 50 / 220, 60	8/0.5	12/1	< 10	327 sec.	disconnect	74	34	27	100
PU 121 K	<b>140623*</b>	230, 50 / 220, 60	8/0.5	12/1	< 25	327 sec.	connect	74	34	27	100
<b>Power reduction without control phase</b>											
PR 12 K LC	<b>142170**</b>	220–230 ±10%, 50 220 ±10%, 60	8/0.5	12/1	< 12	selectable	without control phase	76	34	31	100
PR 12 K D	<b>142150***</b>	220–230 ±10%, 50 220 ±10%, 60	8/0.5	12/1	< 12	selectable	without control phase	76	34	31	100

\* For full-load lamp start

\*\* Time of power-reduced operation selectable, starting point of switching-time changes automatically to suit constantly changing day-night cycles

\*\*\* Power reduction after a constant switching-time (delay switching);

switching-time selectable: 3 | 3.5 | 4 | 4.5 | 5 | 5.5 | 6 hrs at 50 Hz

## Electronic Superimposed Ignitors with Power Switch for HS Lamps 50 to 250 W



For ignition and power reduction of high pressure sodium lamps (HS)

Casing: PC

Control voltage: 230 V ±10%

Response/cut-out voltage: 170-198 V

Phasing of the ignition voltage:


60-90 °el and 240-270 °el

Max. permitted casing temperature  $t_c$ : 80 °C

Push-in terminals: 0.75-1.5 mm<sup>2</sup>

Fastening: male nipple with pre-assembled washer and nut

For luminaires of protection class I and II

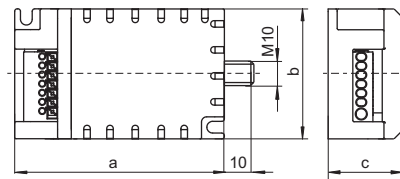

Applicable for positive switch logic allowing for terminal pin assignment of power switch

- Full load lamp start is guaranteed
- Switching to power reduced operation after delay time of approx. 5 min.

Type	Ref. No.	Voltage AC V, Hz	Max. lamp current A	Number of ignition pulses per mains period	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Programmed switch-off time sec./Hz	Casing			Weight g
										a	b	c	
<b>HS lamps 50 and 70 W</b>													
ZPU 70 K D20	142098	230, 50/220, 60	2	4	< 2	< 15	1.8-2.3	20-200	1216/50-60	96	50	32	240
<b>HS lamps 70 (DE) to 250 W</b>													
ZPU 250 K D20	142099	230, 50/220, 60	3	6	< 2	< 15	4-5	20-50	1216/50-60	96	50	32	240

Circuit diagrams see page 107

## Switch Units for Electronic Operating Devices with 1–10 V Interface

Vossloh-Schwabe's switch units are designed to enable one-step power reduction of lamps (FL, CFL, LED, HS, HI and C-HI) with the help of the respective electronic ballast or converter.

To this end, the switch units utilise the 1–10 V interface of the control gear unit. The switch unit is mainly intended for outdoor luminaires in systems with or without a control phase.

Shape: 56x28x27 mm

Casing: PC

Screw terminals: 0.75–2.5 mm<sup>2</sup>

Max. permissible casing temperature  $t_c$ : 80 °C

Min. permissible ambient temperature  $t_a$ : -30 °C

Fastening: plastic male nipple with pre-assembled washer and nut

### Power reduction SU 1–10 V K for lighting systems featuring an L<sub>ST</sub> control phase


The switch unit employs a positive switching to reduce power, i.e. power is reduced when the control phase is switched off (L<sub>ST</sub> = 0 V).

The 1–10 V interface of the electronic ballast is addressed at the moment that power reduction is effected.


### Power reduction PR 1–10 V K LC for lighting systems without a control phase

This switch unit can be used to effect power reduction in lighting systems that do not feature a control phase.


The 1–10 V interface is addressed on the basis of the fundamental operating principle used by Vossloh-Schwabe's PR 12 K LC power switch (details of which can be made available on request). This power switch is capable of determining the starting time of reduced-power operation over the measured operating time of a lighting system. As a result, it is no longer necessary to spend valuable time modifying the power-reduction unit to suit the continually changing day-night cycle; changing the clocks in line with daylight saving measures in the summer and winter is equally unnecessary. The 1–10 V interface of the electronic ballast is addressed as soon as the system is switched to reduced power.



**Circuit diagram SU 1–10 V K**

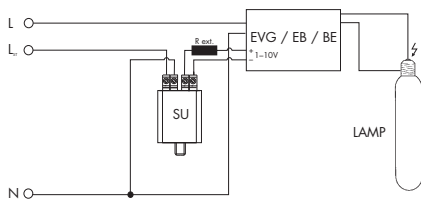

**Circuit diagram PR 1–10 V K LC**

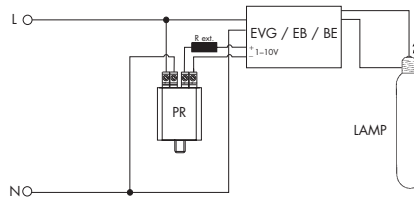

Type	Ref. No.	Control voltage L <sub>ST</sub> V, 50/60 Hz	Externally (on site) connected resistor (R <sub>ext.</sub> ) kΩ (min. 0.1 W)	Self-heating K	Weight g
<b>For lighting systems with control phase</b>					
SU 1–10 V K	149992	220–240 V ±10%	1–70	< 10	50
<b>For lighting systems without control phase</b>					
PR 1–10 V K LC	149993	–	1–70	< 10	50



## Start-up Switches for HS and HI Lamps 35 to 1000 W and HM Lamps 50 to 700 W

**To bridge a phase of darkness during the starting-up period of high-pressure discharge lamps and also after a brief interruption of the power supply until the high-pressure discharge lamps are restarted**

For mercury vapour lamps (HM), high-pressure sodium lamps (HS), metal halide lamps (HI) and ceramic discharge lamps (C-HI)

For HS, HI and C-HI lamps only if used together with a superimposed ignitor

Nominal voltage/frequency:

220-230 V  $\pm$  10%/50-60 Hz

240 V  $\pm$  10%/50 Hz

Max. permitted casing temperature  $t_c$ : 85 °C

Screw terminals: 0.75-2.5 mm<sup>2</sup>


Fastening: male nipple with pre-assembled washer and nut

Max. wattage of incandescent lamp: 1000 W


Automatic switch-off at 60% of the discharge lamp's luminous flux

During the ignition and start-up period, the start-up switch activates an incandescent lamp to provide a basic level of lighting. After a brief interruption in the supply voltage during the re-ignition of the discharge lamp, the integrated control electronics also bridges the phase of darkness by switching on the auxiliary lighting. The incandescent lamp is automatically switched off when the discharge lamp has achieved a sufficient luminous flux (approx. 60%).

### Circuit for HM lamps



### Circuit for HS and HI lamps



### AS 1000 K

Casing: PC


Weight: 100 g

Internal loss: < 0.8 W


Inherent heating: < 10 K

Type: AS 1000 K

Ref. No.: 140627



The time diagram shows some typical switching examples of a luminaire equipped with a high-pressure discharge lamp, incandescent lamp and start-up switch AS 1000 K.

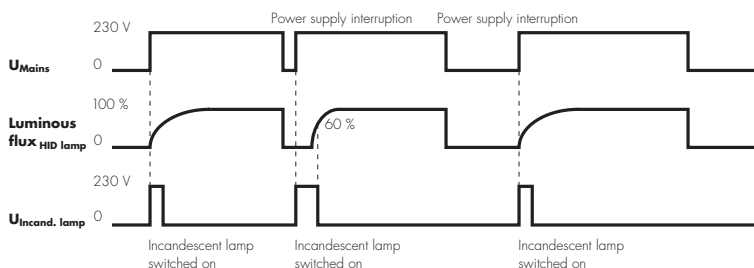

# Ignitors and Accessories for Discharge Lamps

## AS 1000 K A10

Specially for using with electronic ballasts or pulse ignitors for high-pressure discharge lamps

Casing: PC

Delayed switching: 655 sec. (50 Hz)

For luminaires of protection class I and II

Max. contact current: 6 A at  $\lambda$  0.5, 10 A at  $\lambda$  1



Internal loss: < 1 W

Inherent heating: < 12 K





Weight: 100 g

Type: AS 1000 K A10


Ref. No.: 141193

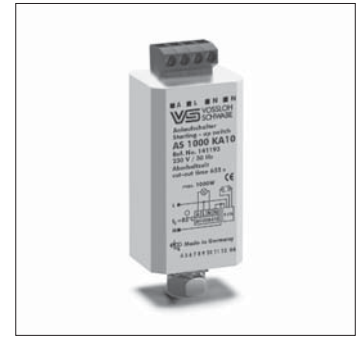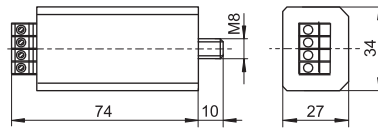

## Circuit with electronic ballast



The time diagram shows some typical switching examples of a luminaire equipped with a high-pressure discharge lamp, incandescent lamp and start-up switch AS 1000 K A10.

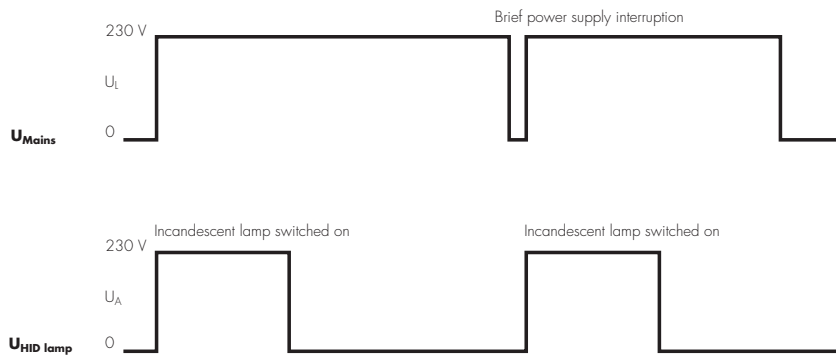

1

2

3

4

5

6

7

8

9

10

## Electronic Discharge Units for Parallel Connected Capacitors 0.1 to 100 $\mu\text{F}$


On luminaires with parallel compensation and designed for plug connection to the mains supply, the plugs retain their charge for a relatively long time after disconnection from the power supply. The discharge resistors built into the compensation capacitor are designed for stationary lamps and when disconnected from the mains permit a voltage reduction to 50 V after 1 minute at the earliest.

According to European standard EN 60598-1, the compensation capacitor on mobile lamps must be discharged to 34 V within 1 second. Until now so-called discharge chokes built like conventional ballasts have been used for this purpose. These conventional discharge chokes are connected in parallel to the compensation capacitor and after disconnection from the power supply rapidly discharge the capacitor owing to their low ohmic resistance.


In their rated operating conditions, conventional discharge chokes exhibit a considerable inductive reactance which diminishes the effect of the compensation capacitor particularly if it has a low capacitance.

Furthermore, conventional discharge chokes cause considerable losses and feature high weight.

**With the aid of the electronic discharge unit CE 50, it is possible to discharge a capacitor with a capacitance of up to 100  $\mu\text{F}$  to 34 V within 1 second, i.e. within the time specified in EN 60598-1.**

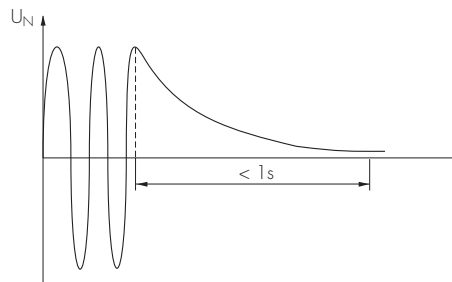

Thanks to its high reliability, low inherent losses, small dimensions and low weight, the CE 50 represents an inexpensive solution to the problem of capacitor discharge.



### CE 50

All electronic, wear resistant switching element

Casing: aluminium

Nominal voltage: 34–264 V

Nominal frequency: 50–60 Hz

Internal loss:  $< 0.5\text{ W}$

Inherent heating:  $< 6\text{ K}$

Max. permitted casing temperature:  $95\text{ }^\circ\text{C}$


Push-in terminals:  $1\text{ mm}^2$

Fastening: male nipple with pre-assembled washer and nut

Weight: 40 g

Type: CE 50

**Ref. No.: 140537**



1

**2**

3

4

5

6

7

8

9

10

## THERMOPLASTICS AND PORCELAIN



### THE RIGHT MATERIAL MIX SPELLS A DECISIVE ADVANTAGE

The lampholders presented in this chapter are designed for high-pressure discharge lamps, for which high ignition voltages and high starting currents are characteristic. High temperatures can also occur with higher lamp outputs.

Vossloh-Schwabe therefore attaches great importance to ensuring casings, contacts and cables are made of high-grade materials.

Owing to the high ignition voltages, these lampholders are also governed by stricter requirements regarding creepage and air clearance distances.

When operating high-pressure discharge lamps with E27 and E40 Edison bases, care must be taken to ensure that the respective lampholders are approved for use with discharge lamps. Lampholders that are suitable in this respect are marked with "5 kV".

Lampholders with E26 and E39 bases and UL-approved wiring can be found under [www.unvlt.com](http://www.unvlt.com).



<b>E27 lampholders</b>	<b>72-74</b>
<b>E40 lampholders</b>	<b>75-76</b>
<b>G8.5 lampholders</b>	<b>77</b>
<b>GX8.5 lampholders, accessories</b>	<b>77</b>
<b>GU6.5 lampholders</b>	<b>78</b>
<b>PGJ5 lampholders</b>	<b>79</b>
<b>GX10 lampholders</b>	<b>80</b>
<b>GY9.5 lampholders</b>	<b>81</b>
<b>G12, GX12-1, PG12-1, PG12-2 lampholders</b>	<b>81-82</b>
<b>RX7s lampholders</b>	<b>83-86</b>
<b>Fc2 lampholders</b>	<b>86-87</b>
<b>K12x30s lampholders</b>	<b>88</b>
<b>K12s-7 support</b>	<b>88</b>
<b>Technical details for discharge lamps</b>	<b>89-131</b>
General technical details	394-401
Glossary	402-404


## E27 Lampholders

For discharge lamps with base E27

E27 lampholders, for cover caps (see p. 113)  
 Profiled shape, external thread 40x2.5 IEC 60399  
 Nominal rating: 4/250/5 kV  
 Push-in twin terminals: 0.5-2.5 mm<sup>2</sup>  
 Fixing holes for screws M3  
 Rear fixing holes for self-tapping screws  
 acc. to ISO 1481/7049-ST3.9-C/F  
 Weight: 15/16.5 g, unit: 500 pcs.  
 Type: 64719

**Ref. No.: 505721** PET GF, black, T210


**Ref. No.: 505720** LCP, black, T270

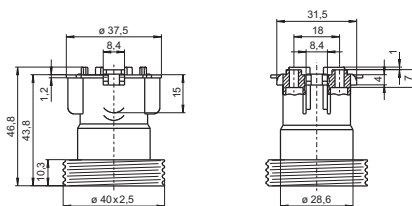

E27 lampholders, for cover caps (see p. 113)  
 Profiled shape, plain  
 Nominal rating: 4/250/5 kV  
 Push-in twin terminals: 0.5-2.5 mm<sup>2</sup>  
 Fixing holes for screws M3  
 Rear fixing holes for self-tapping screws  
 acc. to ISO 1481/7049-ST3.9-C/F  
 Weight: 15 g, unit: 500 pcs.  
 Type: 64770

**Ref. No.: 505389** PET GF, black, T210

**Ref. No.: 505014** LCP, black, T270

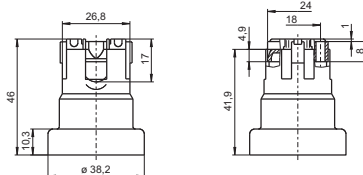


E27 lampholders  
 Casing: PPS, black, T230  
 Nominal rating: 4/500/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Fixing holes for screws M4 and M5  
 Weight: 35/35.4 g, unit: 250 pcs.  
 Type: 62150

**Ref. No.: 108718**

Type: 62151 with lamp safety catch

**Ref. No.: 108719**

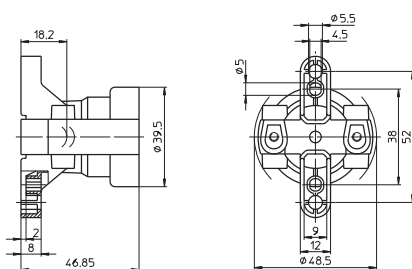


E27 lampholders  
 Casing: porcelain, white, T210  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Oblong holes for screws M4  
 Weight: 65/67.7 g, unit: 200 pcs.  
 Type: 62600

**Ref. No.: 102635**

Type: 62601 with lamp safety catch

**Ref. No.: 102637**

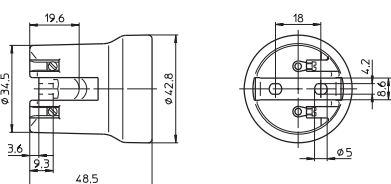


# Lampholders for Discharge Lamps

## E27 lampholder

Casing: porcelain, white, T210  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Threaded bushes for screws M3  
 Weight: 69.3 g, unit: 200 pcs.  
 Type: 62622

**Ref. No.: 108416**

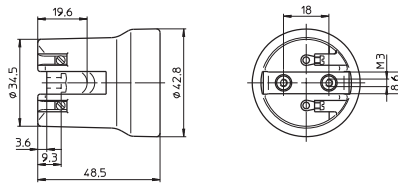

1

2


## E27 lampholders

Casing: porcelain, white, T210  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Oblong holes for screws M4, length max. 15 mm  
 Weight: 106.8/103.9 g, unit: 100 pcs.  
 Type: 62104

**Ref. No.: 102615**

Type: 62105 with lamp safety catch

**Ref. No.: 102617**

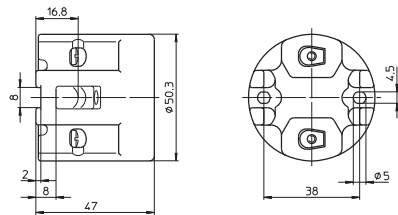

3

4


## E27 lampholders

Casing: porcelain, white, T210  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Fixing bracket with slot for screws M5  
 Weight: 113 g, unit: 100 pcs.  
 Type: 62110

**Ref. No.: 106585**

Type: 62111 with lamp safety catch

**Ref. No.: 109568**

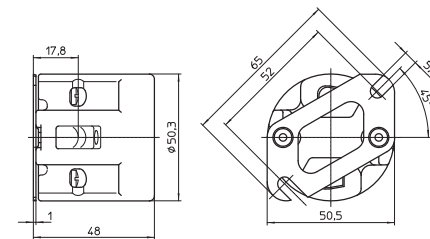

5

6

## E27 lampholders

Casing: porcelain, white, T270  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Fixing oblong holes for screws M4  
 Weight: 60.6 g, unit: 200 pcs.  
 Type: 62050


**Ref. No.: 102599**

Type: 62010 with lamp safety catch (with spring)

**Ref. No.: 102577**

Type: 62009 with lamp safety catch (with crushing)

**Ref. No.: 544605**

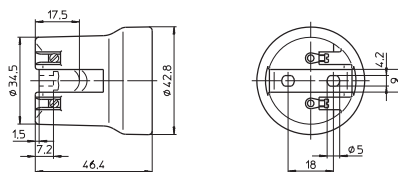


7

8

## E27 lampholder

Casing: porcelain, white, T270  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Fastening bushes for screws M3  
 Weight: 66.3 g, unit: 200 pcs.  
 Type: 62015

**Ref. No.: 102582**

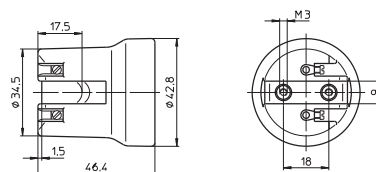

9


10



# Lampholders for Discharge Lamps


E27 lampholder, one-piece  
Material: porcelain, white, T270  
Nominal rating: 4/250/5 kV  
Screw terminals: 0.5-2.5 mm<sup>2</sup>  
Spring loaded central contact  
Fixing oblong holes for screws M4  
Weight: 60.5 g, unit: 200 pcs.  
Type: 62070

**Ref. No.: 543304**

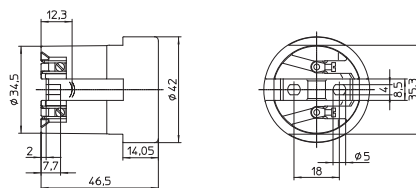


E27 lampholder  
Material: porcelain, white, T270  
Nominal rating: 4/250/5 kV  
Screw terminals: 0.5-2.5 mm<sup>2</sup>  
With lateral fixing flange,  
tilt angle: 15°  
Spring loaded central contact  
Fixing hole for screw M4  
Weight: 67.6 g, unit: 200 pcs.  
Type: 62415

**Ref. No.: 543414**




E27 lampholder, for cover caps (see page 336-338)  
Casing: porcelain, white, T270  
Nominal rating: 4/250/5 kV  
Screw terminals: 0.5-2.5 mm<sup>2</sup>  
Spring loaded central contact  
Fixing oblong holes for screws M4  
Weight: 66.5 g, unit: 150 pcs.  
Type: 62310

**Ref. No.: 102624**

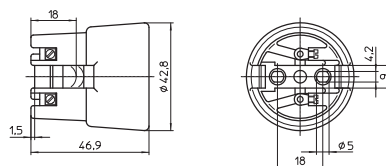

E27 lampholder  
For cover caps type 80010, 97735  
and 97742 (see page 344)  
Casing: porcelain, white, T270  
Nominal rating: 4/250/5 kV  
Screw terminals: 0.5-2.5 mm<sup>2</sup>  
Spring loaded central contact  
Fixing oblong holes for screw M4  
Weight: 66.5 g, unit: 200 pcs.  
Type: 62370

**Ref. No.: 543303**

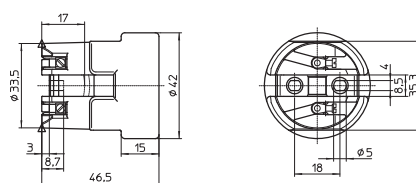

## E40 Lampholders

**For discharge lamps with base E40**

Nominal rating: 18/500/5 kV

Screw terminals: 1.5–4 mm<sup>2</sup>

Spring loaded central contact

E40 lampholders

Casing: PPS, black, T240

Oblong holes for screws M5

Weight: 111.7/112.1 g, unit: 40 pcs.

Type: 12600/12601


**Ref. No.: 400913**

**Ref. No.: 400914** with lamp safety catch

With steel thread

**Ref. No.: 533428**

**Ref. No.: 533429** with lamp safety catch

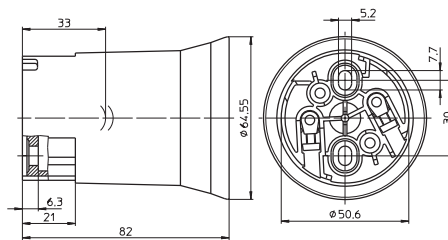

E40 lampholders

Casing: PPS, black, T240

Fixing bracket with slots for screws M5

Weight: 122.3/122.7 g, unit: 40 pcs.

Type: 12610/12611


**Ref. No.: 400915**

**Ref. No.: 400916** with lamp safety catch

With steel thread

**Ref. No.: 533430**

**Ref. No.: 533431** with lamp safety catch

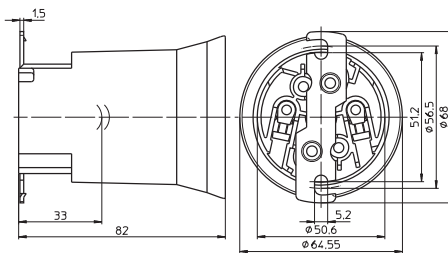

E40 lampholders

Casing: PPS, black, T240

Fixing bracket with tapped fixing holes M5

Weight: 122.9/123.3 g, unit: 40 pcs.

Type: 12614/12612


**Ref. No.: 400917**

**Ref. No.: 400918** with lamp safety catch

With steel thread

**Ref. No.: 536220**

**Ref. No.: 533432** with lamp safety catch

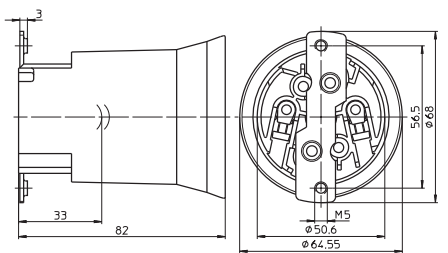

E40 lampholders

Casing: porcelain, white, T270

Oblong holes for screws M5

Weight: 224/229.3 g, unit: 48 pcs.

Type: 12800/12801


**Ref. No.: 108208**

**Ref. No.: 107780** with lamp safety catch

With steel thread

**Ref. No.: 532602**

**Ref. No.: 532603** with lamp safety catch

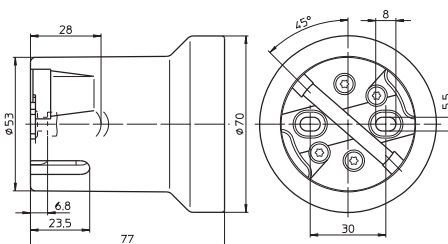

# Lampholders for Discharge Lamps

## E40 lampholders

Casing: porcelain, white, T270

Fixing bracket with slots for screws M5

Weight: 252.3/243 g, unit: 48 pcs.

Type: 12810/12811


**Ref. No.: 108374**

**Ref. No.: 108375** with lamp safety catch

With steel thread

**Ref. No.: 532604**

**Ref. No.: 532605** with lamp safety catch

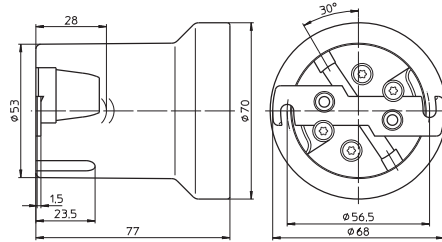

## E40 lampholders

Casing: porcelain, white, T270

Fixing bracket with tapped fixing holes M5

With lamp safety catch



Weight: 252.8 g, unit: 48 pcs.

Type: 12812

**Ref. No.: 108373**

With steel thread

**Ref. No.: 532606**

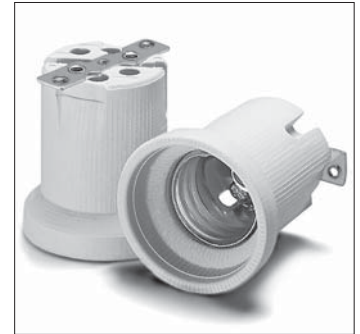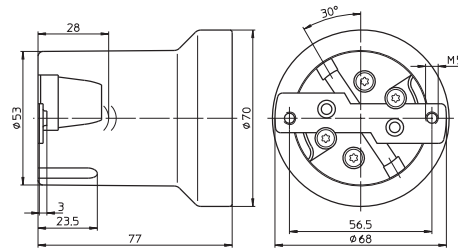

## E40 lampholders

Only for lamps with base E40/E45

Casing: porcelain, white, T270


Oblong holes for screws M5

Weight: 206 g, unit: 50 pcs.

Type: 12900/12901

**Ref. No.: 528252**

**Ref. No.: 528958** with lamp safety catch

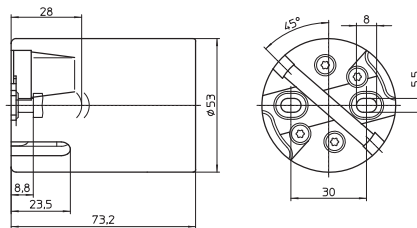

## E40 lampholders

Only for lamps with base E40/E45

Casing: porcelain, white, T270


Fixing bracket with slots for screws M5

Weight: 217 g, unit: 50 pcs.

Type: 12910/12911

**Ref. No.: 528253**

**Ref. No.: 528254** with lamp safety catch

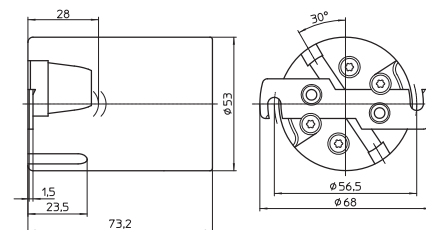

## G8.5 Lampholders

For discharge lamps with base G8.5

Nominal rating: 2/500/5 kV  
 Multipoint contacts: CuNiZn  
 Fixing holes for screws M3


G8.5 lampholders

Push-in terminals for stranded conductors with ferrule bare end of cores  $\varnothing$  1.4-1.8 mm  
 Type: 33600 casing: LCP, black, T270  
 Weight: 5 g, unit: 1000 pcs.

**Ref. No.: 502394**

Type: 33650 casing: ceramic, T300  
 Weight: 12.6 g, unit: 150 pcs.


**new Ref. No.: 554542**

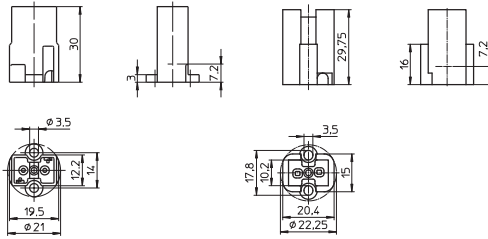

G8.5 lampholder

Casing: ceramic, T300  
 Welded leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,  
 Si-insulation max.  $\varnothing$  3.6 mm, length: 300 mm  
 Weight: 26.4 g, unit: 100 pcs.  
 Type: 33671

**new Ref. No.: 554543**



## GX8.5 Lampholders, Accessories

For discharge lamps with base GX8.5


GX8.5 lampholders

Casing: LCP, cover material: LCP, T270  
 Nominal rating: 2/500/5kV  
 Push-in terminals for stranded conductors with ferrule bare end of cores  $\varnothing$  1.8 mm  
 Weight: 11.9/12.6, unit: 50 pcs.

Type: 34650/34651

**Ref. No.: 547807** fixing holes for screws M3

**Ref. No.: 547808** threaded bushes M3

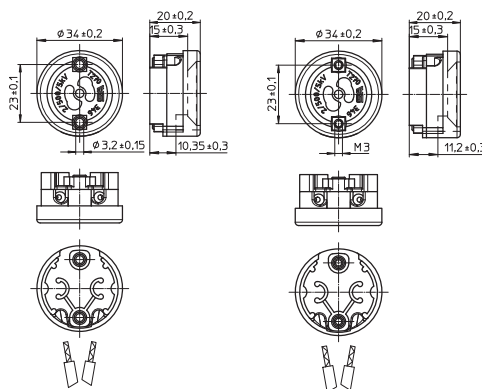


Cover cap for GX8.5 lampholders type 346

For luminaires of protection class II

Material: LCP, black  
 Weight: 5.4 g, unit: 50 pcs.  
 Type: 97685

**Ref. No.: 532521**



## GU6.5 Lampholders

### For discharge lamps with base GU6.5

Suitable for luminaries of protection class II

Casing: ceramic, cover: PPS, T250

Nominal rating: 2/250/5 kV

Leads: Cu nickel-plated, stranded conductors 0.75 mm<sup>2</sup>,  
double PTFE-insulation, length: 250 mm

GU6.5 lampholders


Weight: 13.8 g, unit: 100 pcs.

Type: 34510 fixing holes for screws M3

**Ref. No.: 533957**

Type: 34511 threaded bushes for screws M3

**Ref. No.: 534220**



GU6.5 lampholder


Fixing holes for screws M3

Identical mounting hole layout and lamp focus of the PGJ5 lampholder 34120 offer an effortless interchangeability of both lamp technologies.

Weight: 15 g, unit: 100 pcs.

Type: 34520

**Ref. No.: 539497**



## PGJ5 Lampholders

**For discharge lamps with base PGJ5**

Nominal rating: 2/300/2.5 kV

Fixing holes for screws M3

PGJ5 lampholders with cover plate

Casing: ceramic, cover plate: LCP, T270

Leads: Cu nickel-plated, stranded conductors


0.75 mm<sup>2</sup>, PTFE-insulation, length: 250 mm

Weight: 9.2 g, unit: 100 pcs.

Type: 34105/34106

**Ref. No.: 534080** lateral lead exit

**Ref. No.: 534081** central lead exit



PGJ5 lampholders with cover plate

Suitable for luminaires protection class II

Casing: ceramic, cover plate: LCP, T270

Leads: Cu nickel-plated, stranded conductors



0.75 mm<sup>2</sup>, double PTFE-insulation, length: 250 mm

Weight: 10.6 g, unit: 100 pcs.

Type: 34110/34111

**Ref. No.: 534016** lateral lead exit

**Ref. No.: 534017** central lead exit

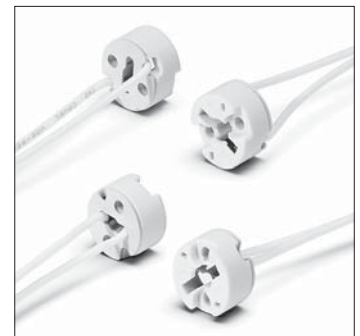

PGJ5 lampholder with cover plate

Suitable for luminaires protection class II

Casing: ceramic, cover plate: LCP, T270

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, double PTFE-insulation, length: 250 mm


Identical mounting hole layout and lamp focus like

for GU6.5 lampholder 34520 offer an effortless

interchangeability of both lamp technologies.

Weight: 11.5 g, unit: 100 pcs., type: 34120

**Ref. No.: 534979**



PGJ5 lampholders with cover plate

Suitable for luminaires protection class II

Casing: ceramic, cover plate: mica, T270

Leads: Cu nickel-plated, stranded conductors



0.75 mm<sup>2</sup>, double PTFE-insulation, length: 250 mm

Weight: 10.8 g, unit: 100 pcs.

Type: 34150/34151

**Ref. No.: 536428** lateral lead exit

**Ref. No.: 536429** central lead exit

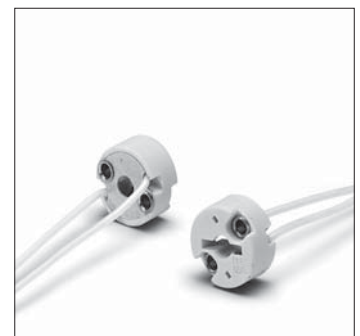


## GX10 Lampholders

### For discharge lamps with base GX10


GX10 lampholder, for luminaires of protection class II  
 Casing: PPS, black, T240, nominal rating: 2/250/5 kV  
 Push-in twin terminals for stranded conductors  
 with ferrule bare end of cores max.  $\varnothing$  1.8 mm  
 Fixing holes for screws M3  
 Weight: 9 g, unit: 100 pcs.. Type: 31400

**Ref. No.: 509356**





GX10 lampholder, for luminaires of protection class II  
 Casing: steatite, cover plate: PPS  
 T240, nominal rating: 2/500/5 kV  
 Push-in terminals for stranded conductors  
 with ferrule bare end of cores  $\varnothing$  1.5–1.8 mm  
 For leads with outer diameter: max. 3 mm  
 Fixing holes for screws M3  
 Weight: 14 g, unit: 100 pcs.  
 Type: 31500

**Ref. No.: 536469**

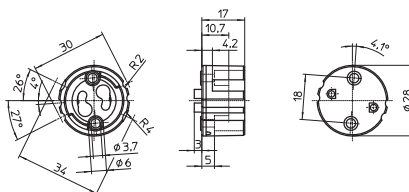



GX10 lampholder  
 Casing: steatite, cover plate: PPS  
 T240, nominal rating: 2/500/5 kV  
 Welded leads: 2x0.75 mm<sup>2</sup>, stranded conductors,  
 length: 400 mm  
 5 kV: Cu nickel-plated, PTFE-insulation,  
 Cu tinned, Si-insulation  
 Fixing holes for screws M3  
 Weight: 36.3 g, unit: 100 pcs.  
 Type: 31500



**new Ref. No.: 549999**

GX10 lampholder, for luminaires of protection class II  
 Casing: steatite, cover plate: PPS  
 T240, nominal rating: 2/500/5 kV  
 Welded leads: Cu nickel-plated, stranded conductors  
 0.75 mm<sup>2</sup>, double PTFE-insulation, length: 250 mm  
 Fixing holes for screws M3  
 Weight: 23.3 g, unit: 100 pcs.  
 Type: 31530

**Ref. No.: 543267**





## GY9.5 Lampholders

For discharge lamps with base GY9.5

GY9.5 lampholder

Casing: ceramic, cover plate: PPS, black

T240, nominal rating: 10/500/5 kV, contacts: Ni

Leads: Cu tinned, stranded conductors

5 kV: 1 mm<sup>2</sup>, Si-insulation max. Ø 3.6 mm,

length: 300 mm and Cu tinned,

stranded conductors 0.75 mm<sup>2</sup>, Si-insulation,



length: 300 mm

Fixing holes for screws M3

Weight: 48 g, unit: 150 pcs.

Type: 37001

Ref. No.: 533663

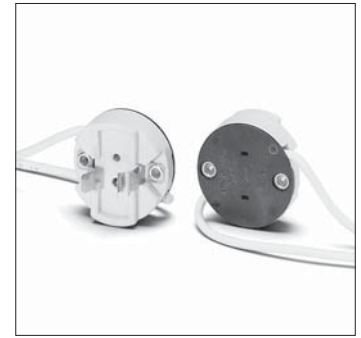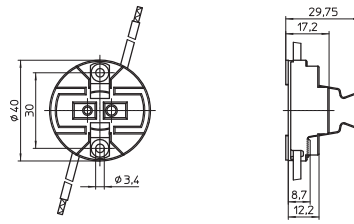

1

2

3

4

## G12, GX12-1, PG12-1, PG12-2 Lampholders

For discharge lamps with base G12, GX12 and PG12

G12 lampholders

Casing: ceramic, cover plate: LCP

T250, nominal rating: 5/500/5 kV

Contacts: CrNi

Push-in terminals for leads with


ferrule bare end of cores max. Ø 1.8 mm

Weight: 30.7 g, unit: 25 pcs.

Type: 42200/42210

Ref. No.: 535750 fixing holes Ø 4.2 mm

Ref. No.: 535751 threaded bushes M3



5

6

G12 lampholders

Casing: ceramic

T250, nominal rating: 5/500/5 kV

Contacts: CrNi

Welded leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>


Si-insulation, white, length: 300 mm

Weight: 43/52 g, unit: 25 pcs.

Type: 42222/42242

Ref. No.: 535755 cover plate: LCP

Ref. No.: 543643 cover plate: ceramic



7

8

G12 lampholder

Casing: LCP, black

T250, nominal rating: 2/500/5 kV

Contacts: CrNi

Push-in terminals for leads with

ferrule bare end of cores max. Ø 1.8 mm


For tinned lead ends: 0.5 - 1 mm<sup>2</sup>

Fixing holes for screws M4

Weight: 13.6 g, unit: 250 pcs.

Type: 42000

Ref. No.: 509213



9

10





# Lampholders for Discharge Lamps

## GX12-1 lampholder

Casing: ceramic, cover plate: PPS, black  
 T220, nominal rating: 2/500/5 kV, contacts: Ni  
 Welded leads: Cu tinned, stranded conductors  
 5 kV: 1 mm<sup>2</sup>, Si-insulation, white,  
 N: 0.75 mm<sup>2</sup>, Si-insulation, brown,  
 length: 300 mm

Fixing holes for screws M4  
 Weight: 58.5 g, unit: 25 pcs.  
 Type: 41900

**Ref. No.: 507656**

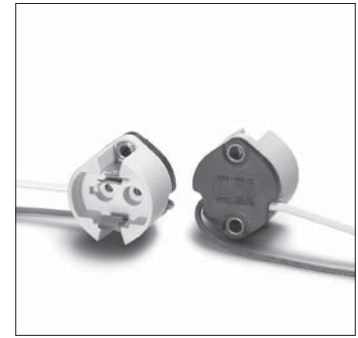


## GX12-1 lampholder

Casing: LCP, black  
 T250, nominal rating: 2/500/5 kV  
 Contacts: CrNi

Push-in terminals for leads with  
 ferrule on bare end of core max. Ø 1.8 mm  
 or for tinned lead ends: 0.5-1 mm<sup>2</sup>

Fixing holes for screws M4  
 Weight: 13.6 g, unit: 50 pcs.  
 Type: 42100

**Ref. No.: 509214**


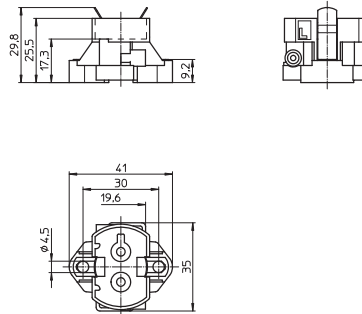


## PG12-1 lampholder

Casing: PPS, black, T220  
 Nominal rating: 4/500/5 kV, contacts: CrNi  
 Push-in terminals for leads with  
 ferrule on bare end of core max. Ø 1.8 mm  
 or for tinned lead ends: 0.5-1 mm<sup>2</sup>

Fixing holes for screws M4  
 Weight: 20.2 g, unit: 100 pcs.  
 Type: 31981

**Ref. No.: 505030**

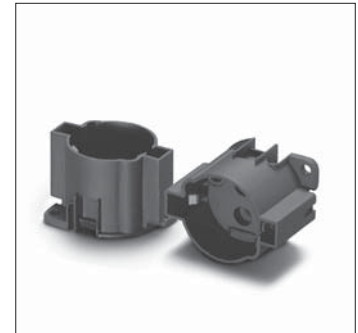



## PG12-1 lampholder

For cover caps (see p. 113)  
 Casing: PPS, black, T220  
 Nominal rating: 4/500/5 kV, contacts: CrNi  
 Push-in terminals for leads with  
 ferrule on bare end of core max. Ø 1.8 mm  
 or for tinned lead ends: 0.5-1 mm<sup>2</sup>

Fixing holes for screws M3  
 Weight: 23 g, unit: 100 pcs.  
 Type: 31980

**Ref. No.: 505029**

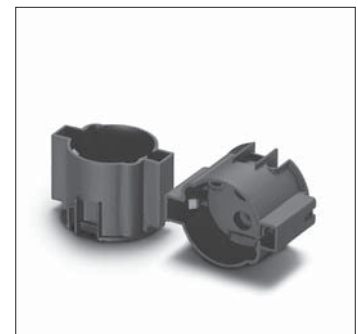

## RX7s Lampholders

If the central hole on the bracket is used for fixing it has to be ensured by an additional support within the luminaire that the bracket cannot be deformed. If the lampholders are used for lamps with ignition voltage max. 20 kV the luminaire manufacturer is responsible for sufficient creepage distances and clearances.

### RX7s lampholders

Contact pin: Ni, nominal rating: 2/500/5 kV  
 Lead: Cu tinned, stranded conductors 1 mm<sup>2</sup>,  
 Si-insulation max. Ø 3.6 mm, length: 300 mm  
 Fixing holes for screws M4  
 Weight: 23.3/20.1 g, unit: 25 pcs.  
 Type: 31662/31672 PPS, black, T220  
**Ref. No.: 107065** lead exit right  
**Ref. No.: 107066** lead exit left  
 Type: 31695/31696 LCP, black, T270  
**Ref. No.: 504416** lead exit right  
**Ref. No.: 504669** lead exit left

### Remark on lampholders type 323 and 343:

The luminaire design must ensure protection from electric shock as well as sufficient creepage distances and clearances from live parts on the back of lampholder.

### Type 343:

With doubled insulated leads suitable for luminaires of protection class II

### RX7s lampholder







Casing: PPS, black, T220  
 Contact pin: Cu, silver bulb  
 Nominal rating: 2/250/5 kV  
 Lead: Cu tinned, stranded conductors 1 mm<sup>2</sup>,  
 Si-insulation max. Ø 3.6 mm, length: 200 mm  
 With screw M4  
 Weight: 14 g, unit: 300 pcs.  
 Type: 34301  
**Ref. No.: 509117**

### RX7s lampholder

Casing: PPS, black, T220  
 Contact pin: Cu, silver bulb  
 Nominal rating: 2/250/5 kV  
 Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,  
 Si-insulation max. Ø 3.6 mm, length: 200 mm  
 Oblong holes for screws M4  
 Central hole for screw M4  
 Other bracket versions on request  
 Weight: 43.8 g, unit: 200 pcs.  
 Type: 34311 contact distance 114.2 mm  
**Ref. No.: 529841**

### RX7s lampholder

Casing: PPS, black, T220  
 Contact pin: Cu, silver bulb  
 Nominal rating: 2/250/5 kV  
 Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,  
 Si-insulation max. Ø 3.6 mm, length: 200 mm  
 Oblong holes for screws M4  
 Central tapped hole M4  
 Weight: 47.5 g, unit: 200 pcs.  
 Type: 34326 contact distance: 132 mm  
**Ref. No.: 529845**

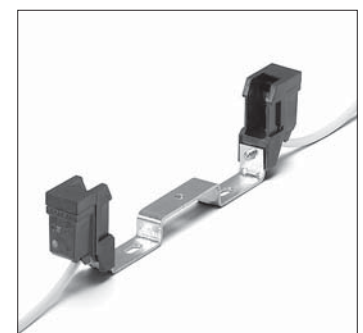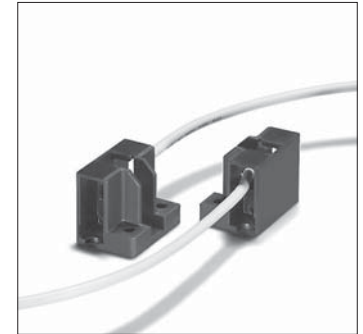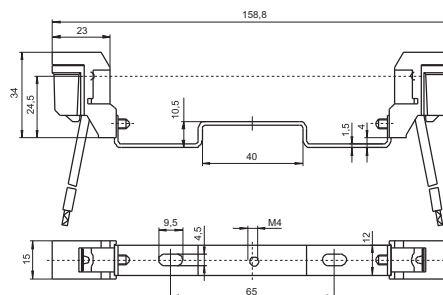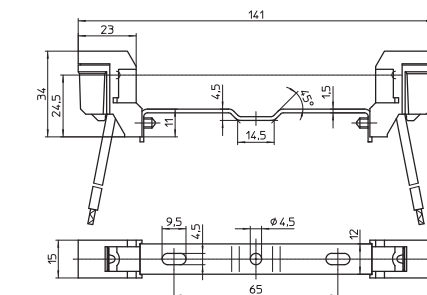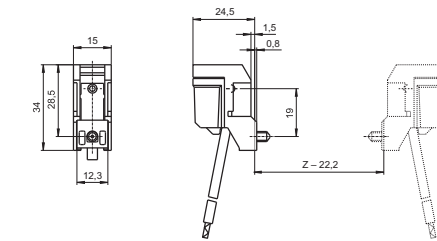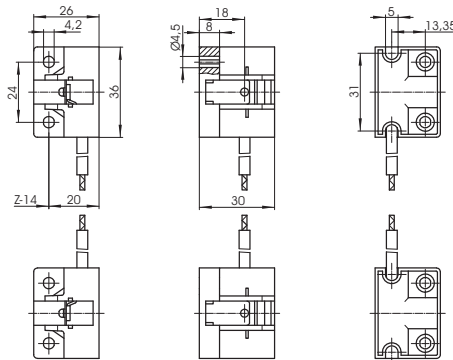

1

2

3

4

5

6

7

8

9

10

# Lampholders for Discharge Lamps

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/500/5 kV

Lead: Cu tinned, stranded conductors 1 mm<sup>2</sup>,



Si-insulation max. Ø 3.6 mm, length: 200 mm

Fixing screw M4

Weight: 26.2 g, unit: 300 pcs.

Type: 32301

**Ref. No.: 100913**

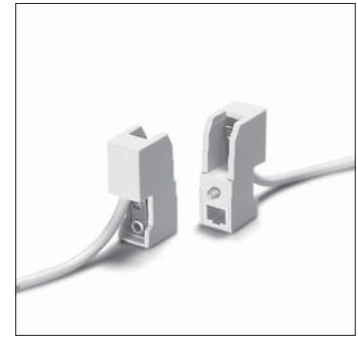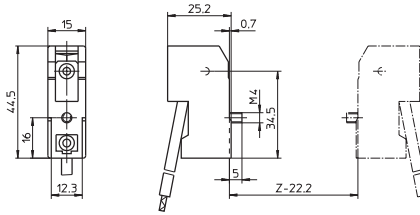

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/500/5 kV

Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,

Si-insulation max. Ø 3.6 mm, length: 200 mm



Oblong holes for screws M4

Central hole for screw M4

Weight: 74.8 g, unit: 200 pcs.

Type: 32311 contact distance: 114.2 mm

**Ref. No.: 100921**

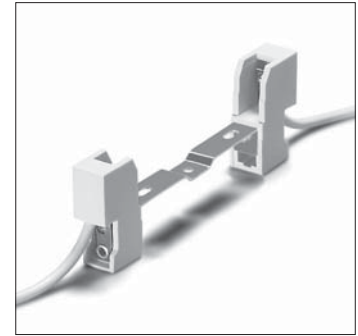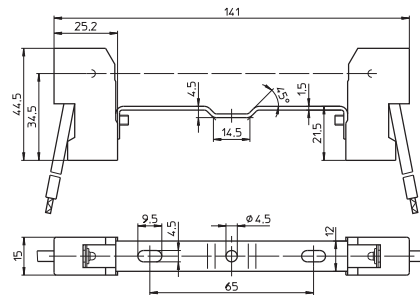

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/500/5 kV

Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,

Si-insulation max. Ø 3.6 mm, length: 200 mm



Oblong holes for screws M4

Central tapped holes M4

Weight: 76 g, unit: 200 pcs.

Type: 32321 contact distance: 114.2 mm

**Ref. No.: 100922**

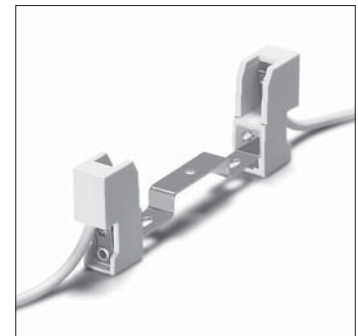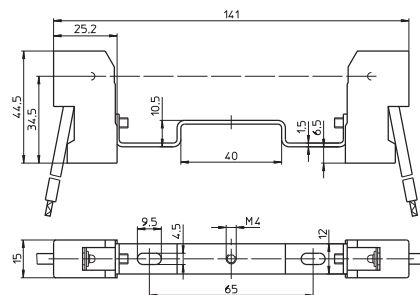

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/500/5 kV

Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,

Si-insulation max. Ø 3.6 mm, length: 200 mm



Oblong holes for screws M4

Central hole for screw M4

Weight: 74 g, unit: 200 pcs.

Type: 32341 contact distance: 114.2 mm

**Ref. No.: 100932**

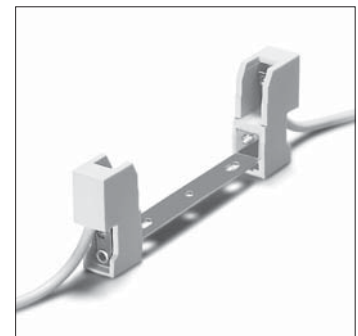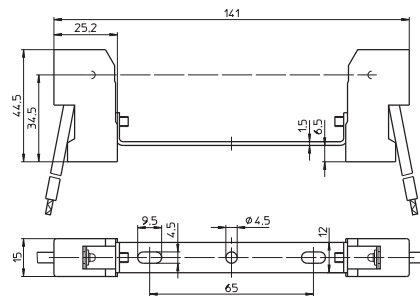

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/500/5 kV

Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,

Si-insulation max. Ø 3.6 mm, length: 200 mm



Oblong holes for screws M4

Central hole for screw M5

Weight: 75.5 g, unit: 200 pcs.

Type: 32361 contact distance: 114.2 mm

**Ref. No.: 100934**

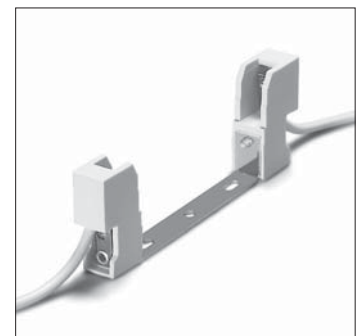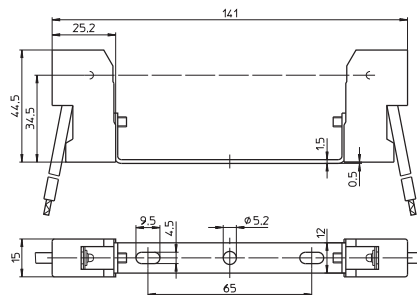

# Lampholders for Discharge Lamps

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/500/5 kV

Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,

Si-insulation max. Ø 3.6 mm, length: 200 mm



Oblong holes for screws M4

Central hole for screw M5

Weight: 76.4 g, unit: 200 pcs.

Type: 32381 contact distance: 114.2 mm

**Ref. No.: 100937**

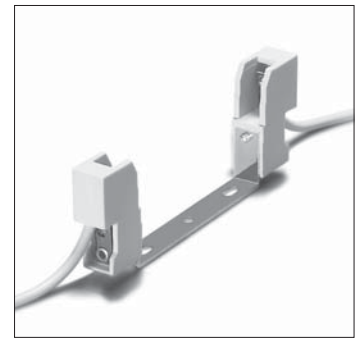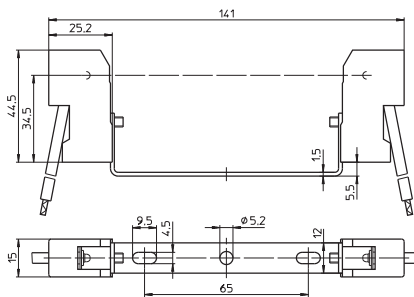

1

2

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/500/5 kV

Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,

Si-insulation max. Ø 3.6 mm, length: 200 mm



Oblong holes for screws M4

Central tapped hole M4

Weight: 78.3 g, unit: 200 pcs.

Type: 32326 contact distance: 132 mm

**Ref. No.: 100925**

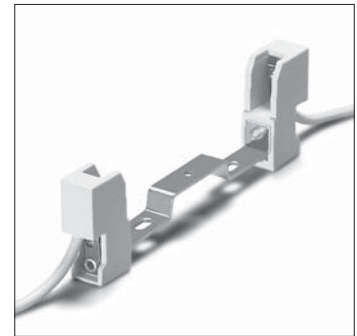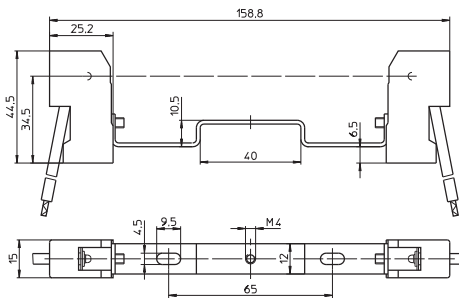

3

4

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/500/5 kV

Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,

Si-insulation max. Ø 3.6 mm, length: 200 mm



Oblong holes for screws M4

Central hole for screw M5

Weight: 77.6 g, unit: 200 pcs.

Type: 32330 contact distance: 132 mm

**Ref. No.: 100928**

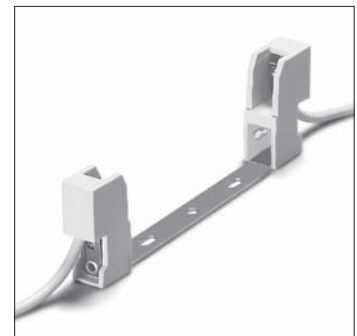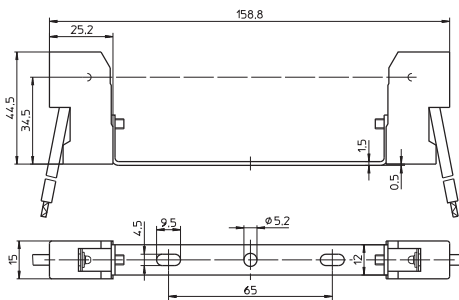

5

6

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/500/5 kV

Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>,

Si-insulation max. Ø 3.6 mm, length: 200 mm



Oblong holes for screws M4

Central hole for screw M5

Weight: 75.7 g, unit: 200 pcs.

Type: 32336 contact distance: 132 mm

**Ref. No.: 100931**

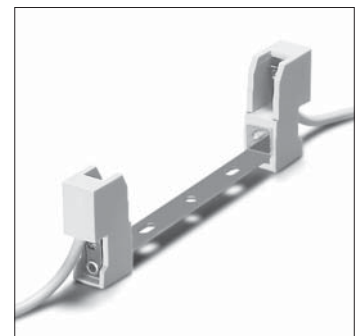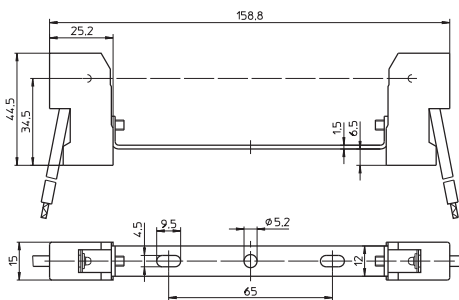

7

8

Protection caps for RX7s lampholders

For push-fit onto lampholders type 323

Protection against electrical shock

on the rear side of the lampholder



Lampholders with assembled protection cap on request

Weight: 0.7/0.6 g, unit: 1000 pcs.

Type: 97528

**Ref. No.: 507592** LCP, natural

**Ref. No.: 507593** PET, white

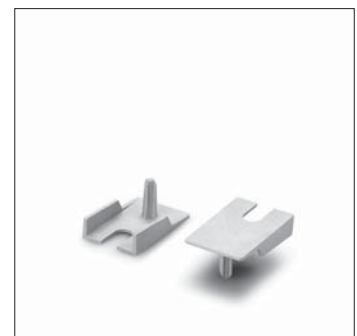

9

10

# Lampholders for Discharge Lamps

## RX7s lampholder

Casing: ceramic, T250

Contact pin: Ni

Nominal rating: 10/500/5 kV

Lead: Cu tinned, stranded conductors 1 mm<sup>2</sup>,



Si-insulation max. Ø 3.6 mm, length: 300 mm

Fixing holes for screws M4

Weight: 72 g, unit: 25 pcs.

Type: 30602

**Ref. No.: 100723**

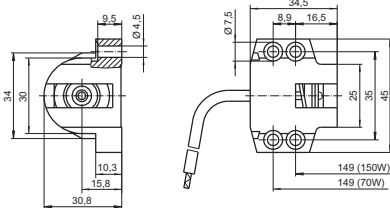

## RX7s lampholder

Casing: ceramic, T250, contact pin: Ni

Nominal rating: 10/500/20 kV

Lead: Cu tinned, stranded conductors 1 mm<sup>2</sup>,

Si-insulation with spun glass filler Ø 7 mm,

for ignition voltage: max. 20 kV,



length: 1000 mm

Fixing holes for screws M4

Weight: 120 g, unit: 25 pcs.

Type: 30620

**Ref. No.: 100741**

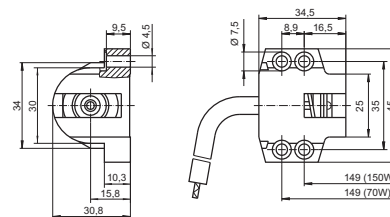

## Fc2 Lampholders

### For discharge lamps with base Fc2

If the lampholders are used for lamps with ignition voltage max. 20 kV the luminaire manufacturer is responsible for sufficient creepage distances and clearances.

## Fc2 lampholder

Casing: ceramic, T250

Nominal rating: 10/500/5 kV

Contacts: Ni

Lead: Cu tinned, stranded conductors 1 mm<sup>2</sup>,



Si-insulation max. Ø 3.6 mm, length: 300 mm

Fixing holes for screws M4

Weight: 100 g, unit: 200 pcs.

Type: 02500

**Ref. No.: 108937**

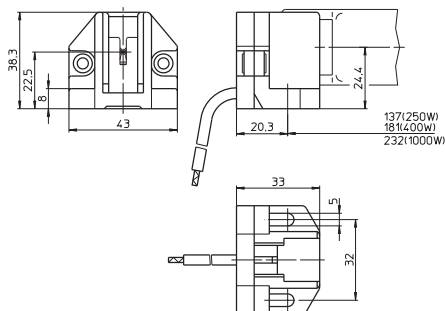

## Fc2 lampholder

Casing: ceramic, T250

Nominal rating: 10/500/5 kV, contacts: Ni

Lead: Cu tinned, stranded conductors 1 mm<sup>2</sup>,



Si-insulation max. Ø 3.6 mm, length: 300 mm

Fixing screws M4, captive

Weight: 102 g, unit: 25 pcs.

Type: 02574 rigid fixing



**Ref. No.: 100096**

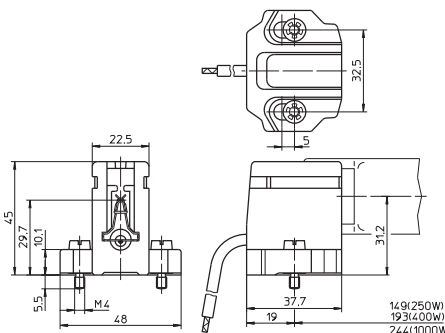

# Lampholders for Discharge Lamps

## Fc2 lampholder

Casing: ceramic, T250  
 Nominal rating: 10/500/5 kV, contacts: Ni  
 Lead: Cu tinned, stranded conductors 1 mm<sup>2</sup>,  
 Si-insulation max. Ø 3.6 mm, length: 300 mm  
 Fixing screws M4, captive  
 Weight: 102 g, unit: 25 pcs.  
 Type: 02575 adjustable fixing  
**Ref. No.: 100098**

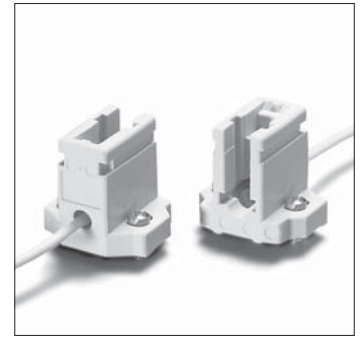
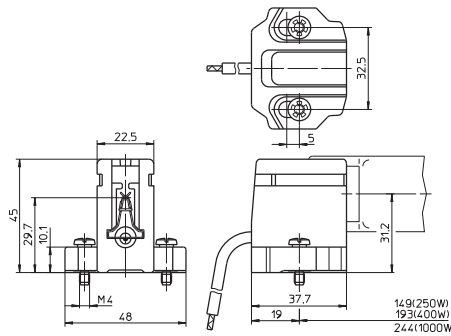


1

2

## Fc2 lampholder

Casing: ceramic, T250  
 Nominal rating: 10/500/20 kV, contacts: Ni  
 Lead: Cu tinned, stranded conductors 1 mm<sup>2</sup>,  
 Si-insulation with spun glass filler Ø 7 mm,  
 for ignition voltage: max. 20 kV,  
 length: 500 mm  
 Fixing screws M4, captive  
 Weight: 120 g, unit: 25 pcs.  
 Type: 02525 rigid fixing  
**Ref. No.: 100082**

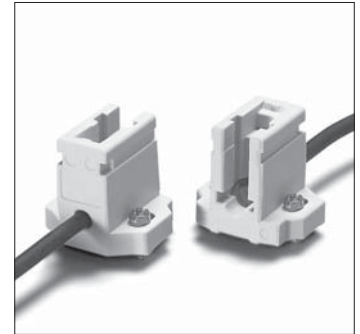
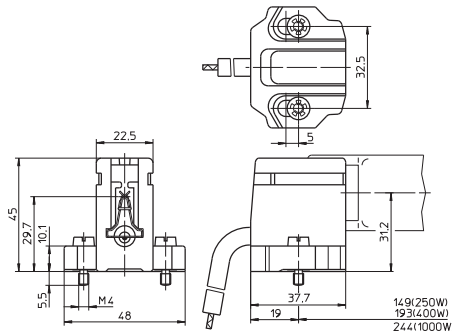


3

4

## Fc2 lampholder

Casing: ceramic, T250  
 Nominal rating: 10/500/20 kV, contacts: Ni  
 Lead: Cu tinned, stranded conductors 1 mm<sup>2</sup>,  
 Si-insulation with spun glass filler Ø 7 mm,  
 for ignition voltage: max. 20 kV,  
 length: 500 mm  
 Fixing screws M4, captive  
 Weight: 120 g, unit: 25 pcs.  
 Type: 02543 adjustable fixing  
**Ref. No.: 100086**

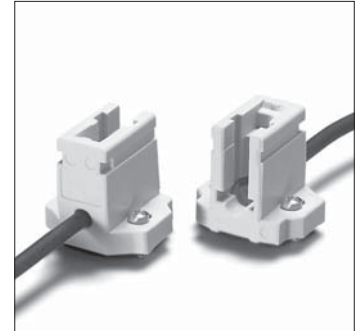
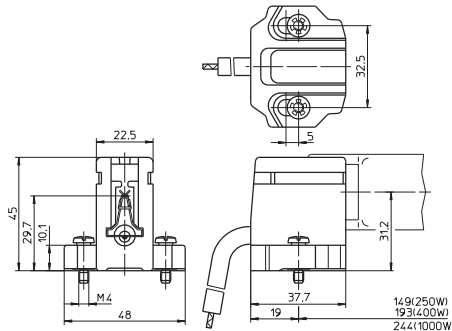


5

6

## Lamp safety catch

For push-fit onto the lampholders 100082,  
 100086, 100096 and 100098  
 Casing: ceramic  
 Spring: stainless steel  
 Weight: 21 g, unit: 50 pcs.  
 Type: 86037  
**Ref. No.: 103818**

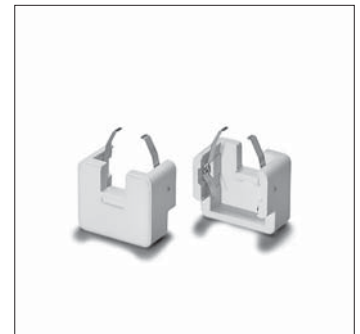

7

8

9

10

## K12x30s Lampholders

### For discharge lamps with base K12x30s

K12x30s lampholders

Suitable for luminaires of protection class II

Casing: LCP, black, T150

Nominal rating: 4/500/3 kV

Contacts: CuSn6, silver plated

Leads: Cu tinned, stranded conductors 1 mm<sup>2</sup>

Si-insulation, doubled insulated

Rear recess M4, wrench size 7



Rear and bottom fixing holes for screws M5

Weight: 75.9/61.5 g, unit: 100 pcs.

Type: 13010

**Ref. No.: 532430** lead length: 705 mm

**Ref. No.: 532431** lead length: 155 mm

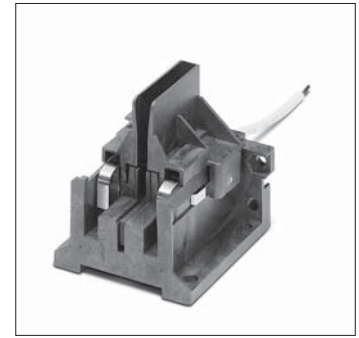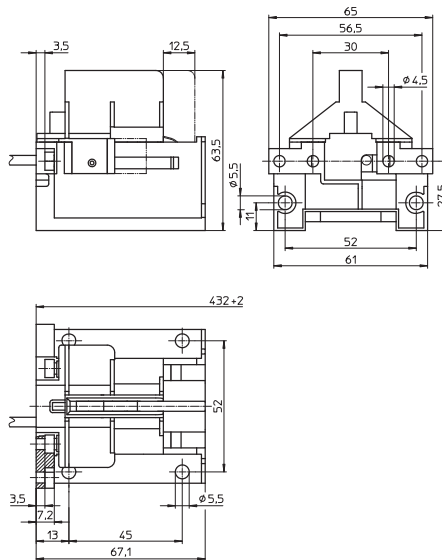

## K12s-7 Support

### For metal halide lamps 1000 and 2000 W

#### Type Osram HQI TS and Radium HRI TS

The luminaire design must ensure protection from electric shock as well as sufficient creepage and clearance distances.

K12s-7 support

Cable connection on cable lug for lead 0.75-2.5 mm<sup>2</sup>

Casing: ceramic, T300


Support: stainless steel, heat-resistant

Oblong holes for screws M5

Weight: 70 g, unit: 25 pcs.

Type: 21100

**Ref. No.: 107677**

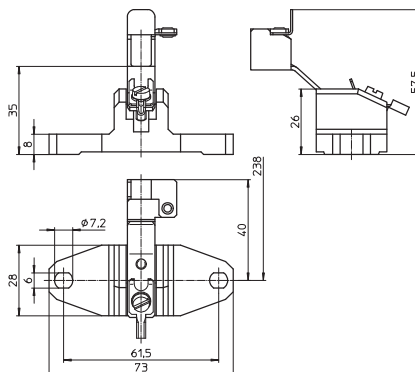

2

Components for Discharge Lamps

<b>Electronic ballasts</b>	<b>90</b>
Assembly instructions for mounting and installing	91 - 96
Circuit diagrams	96
<b>Electromagnetic ballasts</b>	<b>96</b>
Power reduction	97
Assembly instructions for mounting and installing	101 - 104
<b>Electromagnetic control gear units</b>	<b>98</b>
Assembly instructions for mounting and installing	98 - 101
<b>Circuit diagrams – Electromagnetic ballasts</b>	<b>105–107</b>
<b>Lampholders for high-pressure discharge lamps</b>	<b>108–109</b>
<b>Ignitors</b>	<b>109–111</b>
Assembly instructions for mounting and installing	112 - 114
<b>Power switches</b>	<b>115–117</b>
<b>Switch units</b>	<b>117–118</b>
<b>Lamp table</b>	<b>119–129</b>
<b>Energy efficiency classification</b>	<b>130</b>
<b>General technical details</b>	<b>394–401</b>
Glossary	402 - 404

1

2

3

4

5

6

7

8

9

10



If the electrical current through a discharge lamp is increased, a discharge channel with very high luminous efficiency is created in the discharge chamber. Luminous flux and light output increase substantially. The internal pressure of the discharge chamber rises and attains between 1 and 10 bar – these are so-called high-pressure discharge lamps or simply discharge lamps. The light output and colour rendition of high-pressure lamps vary considerably depending on the lamp family.

Discharge lamps can only be operated with ballasts. Igniters are additionally required for sodium lamps and metal halide lamps. Furthermore, to compensate blind current when using magnetic ballasts, compensation capacitors must be fitted. The lampholders enable the lamp to be fixed in the luminaire and ensure simple exchange of lamps at the end of their service life.

As well as stabilising the lamp's operating point, ballasts also influence the lamp's output and luminous flux, the system's light output, the service life of the lamps as well as the colour temperature of the light.

The following chapters provide technical information regarding VS components for

- High-pressure sodium lamps (HS lamps)
- Metal halide lamps (HI lamps)
- Metal halide lamps with a ceramic discharge tube (C-HI lamps)
- Mercury vapour lamps (HM lamps)
- Low-pressure sodium lamps (LS lamps)

Electromagnetic or electronic ballasts can be used for high-pressure discharge lamps. Unlike with fluorescent lamps, lamp efficiency is not decisively altered by the use of electronic ballasts. In contrast, electronic ballasts lead to a reduction of the inherent losses and thus to an increase in system efficiency. In addition, electronic ballasts ensure gentle lamp operation, which increases the lamp's service life.

Independent electronic and electromagnetic ballasts have also been developed, which in the form of control gear units then provide special advantages during application.

## Electronic Ballasts for HI and C-HI Lamps

Electronic ballasts are fitted with all the components required to operate discharge lamps.

Furthermore, they safely shut down lamps at the end of their service life to prevent high temperatures from being generated within the luminaires that could influence the service life of the luminaires and components.

By adding a strain-relief module, VS electronic built-in ballasts turn into independent operating devices that can, for instance, be used as a power unit and can also be installed in intermediate ceilings in this form.

### Dimmable electronic ballasts

The series of dimmable electronic ballasts for discharge lamps has been optimised in terms of efficiency and cost-effectiveness. A 40% drop in power consumption can be achieved thanks to these dimmable electronic devices. In addition, maintenance work required on site can also be reduced since, when integrated into a networked lighting system, these EBs provide feedback on possible problems, which in turn enables targeted maintenance work.

The low weight and compact dimensions of these devices provide further advantages over conventional solutions.

The electronic ballasts are fitted with a dimmer interface that can be connected both to DALI and the MidNight module. In accordance with the lamp specifications of leading lamp manufacturers, lighting levels can be dimmed by up to 50%. If no dimming signal is applied, the lighting level of the luminaire will remain at 100%.

## MidNight – Multi-Step dimming

The MidNight concept is based on dimmable ballasts for integration in lampposts; these ballasts can be programmed to create different light scenes with different dimm settings.

The simplicity of MidNight makes it a most innovative solution for street lighting as there is no need to install complex systems.

## DALI

This dimming mode is characterised by immunity to interference and precise addressing via the DALI interface, error feedback, programmable operating parameters in DALI mode and stepless dimming range of up to 50%. The EHXd-DALI provides advanced functionality and makes it the perfect fit for current and future indoor and street lighting applications.

Standardisation Ballasts fully comply with the new DALI IEC 62386 standard.

Extensive protocol (optional)

Advanced control and monitoring commands that comply with Part X.203 of the DALI standard.

Various DALI devices

Compliance with all standard DALI controllers and device as well as all Lonmark® DALI devices.

Super-low communication-noise mechanism

Years of working with various DALI nodes in the market have positioned the EHXd-DALI as a device that causes one of the lowest degrees of communication interference.

Up-to-date and debugged

Ballast firmware can be upgraded remotely (using the DALI terminals).

## Assembly Instructions for Electronic Ballasts

### Assembly instructions for mounting and installing electronic ballasts for high-pressure discharge lamps

#### Mandatory regulations

DIN VDE 0100 Erection of low voltage installations

EN 60598-1 Luminaires – part 1: general requirements and tests

EN 61347-1 Operating devices for lamps – part 1: general and safety requirements

EN 61347-2-12 Control gear for lamps; part 2-12: Particular requirements for d.c. or a.c. supplied electronic ballasts for discharge lamps (excluding fluorescent lamps)

EN 55015 Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

EN 61000-3-2 Electromagnetic Compatibility (EMC) – part 3: maximum values – main section part 2: maximum values for mains harmonics (device input current up to and including 16 A per conductor)

EN 61547 Installations for general lighting purposes – EMC immunity requirements



1

2

3

4

5

6

7

8

9

10

## Descriptions of VS EBs for discharge lamps

The type designations for VS HID ballasts all follow the same pattern, as follows:

EHXc	70	.326
Electronic ballast for HID lamps	Wattage	Serial number

## Mechanical mounting

**Surface** Firm, flat surface required to ensure good heat transfer. Avoid mounting on protruding surfaces.

### Mounting location

Electronic ballasts must be protected against moisture and heat. Installation in outdoor luminaires: water protection rate of > 4 (e.g. IP54 required).

**Fastening** Using M4 screws in the designated holes

**Heat transfer** If the ballast is destined for installation in a luminaire, sufficient heat transfer must be ensured between the electronic ballast and the luminaire casing. Electronic ballasts should be mounted with the greatest possible clearance to heat sources or lamps. During operation, the temperature measure at the ballast's  $t_c$  point must not exceed the specified maximum value.

## Supplement for independent electronic ballasts

**Mounting position** Any

**Clearance** Min. of 0.10 m from walls, ceilings and insulation  
Min. of 0.10 m from further electronic ballasts  
Min. of 0.25 m from sources of heat (lamp)

**Surface** Solid; EB must not be allowed to sink into insulation materials

## Technical specifications

Type	Operating voltage range AC: 220 V...240 V	Protective conductor mA	Mean service life*** hrs.	Power factor ë	Temperature protection*	Possible no. of VS devices/automatic cut-out type			
						B (10A)	B (16A)	C (10A)	C (16A)
<b>Standard EB</b>									
EHXc 20.329	+6 - 10%	≤ 0.5	50,000 ( $t_c$ 75 °C)	> 0.9	yes	11	18	18	30
EHXc 20.370	±10%	≤ 0.5	30,000 ( $t_c$ 75 °C)	0.95	yes	37	45	37	45
			50,000 ( $t_c$ 70 °C)						
EHXc 35.325 (183033;183034)	±10%	≤ 0.5	32,000 ( $t_c$ 85 °C)	0.95	yes**	7	12	12	20
			40,000 ( $t_c$ 80 °C)						
			50,000 ( $t_c$ 75 °C)						
EHXc 35.325 (183035)	±10%	≤ 0.5	32,000 ( $t_c$ 80 °C)	0.95	yes	7	12	12	20
			40,000 ( $t_c$ 75 °C)						
			50,000 ( $t_c$ 70 °C)						
EHXc 35G.327	+6 - 10%	≤ 0.5	30,000 ( $t_c$ 80 °C)	> 0.95	yes	7	12	12	20
EHXc 35.371	±10%	≤ 0.5	30,000 ( $t_c$ 75 °C)	0.95	yes	37	45	37	45
			50,000 ( $t_c$ 70 °C)						
EHXe 35.356	±10%	≤ 0.5	30,000 ( $t_c$ 80 °C)	0.95	yes	7	12	12	20
EHXc 235.316	+6 - 10%	≤ 0.5	50,000 ( $t_c$ 70 °C)	0.98	yes	7	12	12	20
EHXc 50.358	±10%	≤ 0.5	40,000 ( $t_c$ 80 °C)	0.95	yes**	7	12	12	20
EHXc 50.372	±10%	≤ 0.5	30,000 ( $t_c$ 75 °C)	0.95	yes	28	45	28	45
			50,000 ( $t_c$ 70 °C)						

\* The devices are fitted with a temperature switch to protect against impermissible overheating.

Once the device has cooled down, it is switched on again. It may prove necessary to briefly dis- and then reconnect the device to the mains voltage.

\*\* The temperature protection inside the luminaire must be checked when using devices without a cap.

\*\*\* To achieve the mean service life, the max. temperature ( $t_{c,max}$ ) at the  $t_c$  point must not be exceeded; failure rate = 0.2% per 1000 hrs

# Technical Details – Components for Discharge Lamps

Type	Operating voltage range AC: 220 V...240 V	Protective conductor mA	Mean service life*** hrs.	Power factor ë	Temperature protection*	Possible no. of VS devices/automatic cut-out type			
						B (10A)	B (16A)	C (10A)	C (16A)
<b>Standard EB</b>									
EHXc 70.326 (183036; 183037)	±10%	≤ 0.5	32,000 (t <sub>c</sub> 80 °C)	0.95	yes**	7	12	12	20
			40,000 (t <sub>c</sub> 75 °C)						
			50,000 (t <sub>c</sub> 70 °C)						
EHXc 70.326 (183038)	±10%	≤ 0.5	26,000 (t <sub>c</sub> 75 °C)	0.95	yes	7	12	12	20
			40,000 (t <sub>c</sub> 65 °C)						
			50,000 (t <sub>c</sub> 60 °C)						
EHXc 70.373	±10%	≤ 0.5	30,000 (t <sub>c</sub> 80 °C)	0.95	yes	20	32	20	32
			50,000 (t <sub>c</sub> 70 °C)						
EHXe 70.357	±10%	≤ 0.5	30,000 (t <sub>c</sub> 75 °C)	0.95	yes	7	12	12	20
EHXc 270.317	+6 -10%	≤ 0.5	50,000 (t <sub>c</sub> 70 °C)	0.98	yes	4	7	7	12
EHXc 100.353	±10%	< 2	50,000 (t <sub>c</sub> 70 °C)	> 0.95	yes	4	6	6	11
EHXc 150G.334	+6 -10%	≤ 0.5	50,000 (t <sub>c</sub> 75 °C)	> 0.98	yes	4	7	7	12
<b>Dimmable DALI/MidNight EB (Dual)</b>									
EHXd 50.360	±10%	≤ 0.5	50,000 (t <sub>c</sub> 80 °C)	0.98	yes	30	47	30	47
EHXd 70.361	±10%	≤ 0.5	50,000 (t <sub>c</sub> 80 °C)	0.98	yes	22	35	22	35
EHXd 100.362	±10%	≤ 0.5	50,000 (t <sub>c</sub> 75 °C)	0.98	yes	15	24	15	24
EHXd 150.363	±10%	≤ 0.5	50,000 (t <sub>c</sub> 75 °C)	0.98	yes	10	16	10	16
EHXd 250.364	±10%	≤ 0.5	50,000 (t <sub>c</sub> 65 °C)	0.98	yes	6	10	6	10

\* The devices are fitted with a temperature switch to protect against impermissible overheating.

Once the device has cooled down, it is switched on again. It may prove necessary to briefly dis- and then reconnect the device to the mains voltage.

\*\* The temperature protection inside the luminaire must be checked when using devices without a cap.

\*\*\* To achieve the mean service life, the max. temperature (t<sub>c max</sub>) at the t<sub>c</sub> point must not be exceeded; failure rate = 0.2% per 1000 hrs

## Product features

### Shutdown of defective lamps

In the event of a lamp failing to ignite or of a lamp with an increased operating voltage (end of the lamp's service life), the electronic ballast will switch off after a defined period of time (< 20 minutes). The ballast will also shut down if the lamp fails to attain its specified rated output. The ballast can be reset by disconnecting and then reconnecting the mains voltage. The ballast must always be disconnected from the mains prior to changing a lamp.

### EOL Effect

In high-pressure discharge lamps, the EOL effect manifests itself in a change of the lamp's voltage. These changes can, for instance, occur due to unsealed parts of the burner or the rectifier effect. An automatic EOL cut-out prevents safety risks at the end of the service life of high-pressure discharge lamps. EOL tests are conducted to check the behaviour of electronic ballasts at the end of a lamp's service life. The EOL cut-out stops the lamp base overheating at the end of a lamp's service life.

### Short-circuit resistance

The ballast outputs (to the lamp) are short-circuit-proof. Short-circuits between the lamp connection and the casing (earth conductor) will destroy the ballast.

### Temperature protection

To prevent excess temperatures, some ballasts are fitted with temperature protection. A ballast will restart after it has cooled down. It might be necessary to briefly interrupt the supply voltage. The table on page 92-93 contains a list of temperature-protected devices.

### Transient mains peak protection

Values are in compliance with EN 61547 (interference immunity).

## Electrical installation

- Wiring
- The wiring between the mains, electronic ballast and lamp must comply with the respective circuit diagram. Note: the luminaire casing (metal) must be connected to the earth conductor.
  - The electronic ballast must be earthed using a toothed washer or similar (protection class I, compliance with RFI/BCI standards).
  - To ensure compliance with RFI suppression limits, mains conductors should not be wired parallel to lamp conductors and maximum clearance should be ensured.
  - After the installation of electronic ballasts, luminaires must be tested to ensure compliance with maximum values laid down in EN 55015.

It is permissible to connect the protective conductor of the ballast by attaching the ballast to metal conductors that are connected to the protective conductor. In doing so, care must be taken to ensure the protective conductor is contacted in accordance with EN 60598. If, however, a ballast is fitted with a connection terminal for a protective conductor without through-wiring and if this is to be used to connect the protective conductor, this connection terminal may only be used for the ballast itself.

- Push-in terminals
- The used terminals can be connected using rigid or flexible conductors with a section of 0.75-2.5 mm<sup>2</sup> (K35 ballasts: 0.5-1.5 mm<sup>2</sup>). The stripped conductor length is 10-11 mm (K35 ballasts: 8.5-9.5 mm, K40/41 and M42/M45 ballasts: 5-6 mm ) for terminal grid 3.5 mm. Conductors must not be tin-plated.

- Error current
- Impulse-resistant leak-current protection must be installed. Distribute the luminaires to phases L1, L2 and L3; install tri-phase FI switches. If permissible, install FI switches with 30 mA leak current; connect no more than 15 luminaires as FI switches can be triggered at half the leak current value.

### Tri-phase connection of luminaires with EB

- Prior to operating newly installed lighting systems: check the mains voltage is appropriate to the electronic ballast's mains voltage range (AC, DC).
- The N-type conductor must be properly connected to all luminaires or ballasts.
- Conductors can only be connected or disconnected if the ballast is disconnected from the mains. Attention: N-type conductors must never be disconnected individually or as the first element.
- Insulation resistance test: from L to PE (L and N must not be connected)
- The neutral conductor must be reconnected after completion of the test.

### Electromagnetic Compatibility (EMC)

Vossloh-Schwabe's electronic ballast range was developed in accordance with valid EMC standards (interference, interference immunity and mains harmonics) and specially designed to ensure safe compliance with the limiting values. It is assumed that any remarks regarding conductor wiring and conductor length in the instructions for installing electronic ballasts in luminaires or for independent ballasts will be observed.

- Compensation
- Luminaires with electronic ballasts do not need compensation (power factor  $\geq 0.95$ ).

## Selection of automatic cut-outs

### Dimensioning automatic cut-outs

High transient currents occur when an EB is switched on because the capacitors have to load. Lamp ignition occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.

- Release reaction
- The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics.

No. of electronic ballasts (see table on page 92–93)

The maximum number of VS ballasts applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible ballasts must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m [2.5 mm<sup>2</sup>] of conductor from the power supply to the distributor and a further 15 m to the luminaire). Doubling circuit impedance to 800 mΩ increases the possible number of ballasts by 10%.

## Additional information

Information on the installation of electronic ballasts for optimising EMC. To ensure good radio interference suppression and the greatest possible operating safety, the following points should be observed when installing electronic ballasts:

- Conductors between the EB and the lamp (HF conductors) must be kept short (reduction of electromagnetic interference).
- Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another. The distance between HF and mains conductors should be as large as possible, ideally > 5 cm. (This prevents the induction of interference between the mains and lamp conductors.)
- The mains conductor within the luminaire must be kept short (to reduce the induction of interference).
- Devices must be properly earthed. EBs require secure contacts to the luminaire casing or must be earthed using a PE connection. This PE connection should be effected using an independent conductor to achieve better dissipation of the leak current. EMC improves at frequencies greater than 30 MHz.
- The mains conductor must not be laid too close to the EB or the lamp (this is especially important in the event of through-wiring).
- Mains and lamp conductors must not be crossed. Should this be impossible to avoid, conductors should be crossed at right angles to one another if at all possible.
- Should conductors be wired through metal parts, such conductors must always be additionally shielded (e.g. with an insulating sleeve or grommet).

Temperature

Reference point temperature  $t_c$

The safe operation of electronic ballasts is dependent on the maximum permissible temperature not being exceeded at the measuring point. Vossloh-Schwabe has determined a casing temperature measuring point –  $t_{c \text{ max.}}$  – on all EB casings. To avoid shortening the service life or diminishing operating safety, the stipulated maximum temperature must not be exceeded at this  $t_c$  point. This point is determined by testing the converter during normal, IEC-standardised operation at the specified ambient temperature ( $t_a$ ), which is also indicated on the type plate. As both the design-related ambient temperature and the ballast's inherent heat, as determined by the installed load, are subject to great variation, the casing temperature should be tested at the  $t_c$  point under real installation conditions.

Ambient temperature  $t_a$

The ambient temperature – as specified on every EB – denotes the permissible temperature range within the luminaire.

Reliability and service life

If the max. temperature at the  $t_c$  reference point (as specified on the type plate and the technical documentation of the ballast) is not exceeded, the defined service life can be expected to be achieved, assuming a switching cycle of 165 minutes on and 15 minutes off. See table on page 92–93 for service life details.

1

2

3

4

5

6


7

8


9

10


## Circuit diagrams for metal halide lamps (HI) and high-pressure sodium lamps (HS) with electronic ballasts (EB)




20.370, 35.371,  
50.372, 70.373




20.329, 35G.327, 35.325,  
35.356, 50.358, 70.326,  
70.357, 150G.334




235.316, 270.317



100.353



50.360, 70.361, 100.362,  
150.363, 250.364



50.360, 70.361, 100.362,  
150.363, 250.364

## Electromagnetic Ballasts for Discharge Lamps

### Electromagnetic ballasts for HI and HS Lamps


As the lamp manufacturer's reference values regarding lamp current and voltage are generally identical for metal halide (HI) and high-pressure sodium lamps (HS) of the same lamp wattage and the impedance values required for the ballast are also identical, the same ballasts can frequently be used for both lamp types. It should be remembered that HI lamps react sensitively to impedance deviations from the rated value with appreciable colour changes. Vossloh-Schwabe ballasts therefore comply with the lamp's narrower tolerances. Moreover, ballasts remain below the maximum peak DC value for HI lamps. This value is not specified for HS lamps; instead, the maximum stated start-up current must not be exceeded.

In order to keep the temperature of the luminaires and the electrical values of the lamps within tolerable limits, the impedance of the ballasts must remain constant over the entire service life. A so-called service life test (test of thermal durability) provides proof of this requirement having been met.

HI and HS lamps constitute a special case in terms of thermal testing. In rare cases, a safety risk can occur at the end of the service life of lamps fitted with external bulbs. The safety risk is caused by the so-called lamp rectifier effect, which can lead to overheating of ballasts, ignitors, lampholders and conductors and can therefore destroy the luminaire. Against this background, the luminaire standard EN 60598-1 "luminaires; part 1: general requirements and tests" has been supplemented by tests concerning this safety risk. As a result, since 1 September 2002, it has been illegal to market luminaires that do not comply with the new regulations. This means luminaires need to be fitted with thermal protection that prevents a luminaire from overheating in the event of this malfunction.

**In this respect, it is recommended to use VS ballasts with temperature switches that have already been tested using this circuit.**

### Test circuit for thermally protected ballasts



DUT Device under Test  
D Diode, 100A, 600V  
R Resistor, 0...200  
(1/2 lamp output)  
 $U_N$  110% of rated  
supply voltage

## Electromagnetic ballasts for HM lamps

Even in the event of major mains fluctuations (92–106% of the rated voltage), the ballast must not fall short of the no-load voltage specified by the lamp manufacturer nor exceed a fixed short-circuit current. The start-up current must be high enough to ensure that at least 90% of the lamp's operating voltage is achieved within 15 minutes.

## Power reduction with HS and HM lamps

The lamp wattage can be reduced by operating the ballast at a higher impedance value, higher than the rated value. The lamp manufacturer's specifications must be observed in doing so to avoid shortening the lamp's service life. The lamps should be started at the ballast's rated impedance and only switched down to reduced operation after a period of at least five minutes.

The impedance value can be altered by using an additional ballast (high-effort option) or by using a switchable ballast (low-cost option). These ballast models can be switched using either a modern, time-controlled electronic power reduction switch, which is equipped with an additional control conductor (230 V), or a power reduction switch with a constant incentive rate setting (no control conductor).

The construction of power reduction switches with control conductors differs according to the selected increase in impedance.

## Power reduction with switchable ballasts

Ballast type	Tested with	Mains voltage	System output 100% W	Reduced system output W	%	Reduced luminous flux % (approx. values)
U-NaHJ 70/40%	HS 70	230, 50	83	50	60	55
U-NaH 100/40%	HS 100	230, 50	114	67	58	55
U-NaH 150/40%	HS 150	230, 50	160	98	61	55
U-NaH 250/40%	HS 250	230, 50	271	150	55	50
U-NaH 400/250.805	HS 400	230, 50	421	253	60	50
Q 80/50.596	HM 80	230, 50	90	55	61	55
Q 125/80.611	HM 125	230, 50	134	89	65	55
U-Q 250/150.438	HM 250	230, 50	274	164	60	55
U-Q 400/250.437	HM 400	230, 50	422	267	65	55

Example: Osram lamp, type NAV, HQL

## Start-up switches

As high-pressure lamps operate with a start-up phase, the lamp's full luminous flux will only be reached after completion of this start-up period. In the event of disconnection from the mains, this start-up phase is dependent on the lamp's temperature. If an additional source of light is desired or required for this start-up period for safety-relevant applications, it is possible to switch on an auxiliary lamp with the help of a start-up switch.

There are two types of start-up switches:

- AS 1000 K for superimposed ignition systems. This switch monitors the lamp's operating voltage. If this is below a defined value (approx. 60% of the lamp's luminous flux), an auxiliary lamp is switched on.
- AS 1000 K A10 for pulse ignition systems and electronic ballasts. This model switches the auxiliary lamp off after a defined period of time (10 minutes), after which the high-pressure lamp will have reached the desired illumination level.

Lamp family	Typical start-up time	Typical restart time (mains interruption at lamp operating temperature)
HS	3 min.	5 min.
HI / C-HI	3 min.	10 min.
HM	4–5 min.	4–5 min.
LS	10 min.	5 min.

1

2

3

4

5



6

7

8

9

10

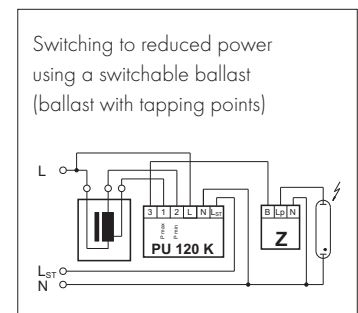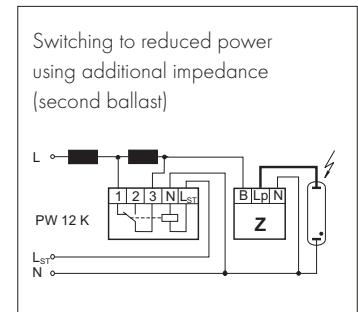



## Control Gear Units for High-pressure Discharge Lamps

### With electromagnetic ballasts

Control gear units with electromagnetic ballasts for high-pressure sodium lamps (HS), metal halide lamps (Hl) and metal halide lamps with a ceramic discharge tube (C-Hl) are fitted with all the components needed to ensure safe normal operation. Apart from a ballast, control gear units also contain a digital timer ignitor with IPP++ technology (Intelligent-Pulse-Pause-Mode), a compensation capacitor and a temperature switch with automatic reset. As all these components form a matched system, they create optimum operating conditions for lamps and small models. These compact control gear units remove the need for separate installation and wiring of individual components, thus considerably reducing assembly time.

### Mandatory regulations

DIN VDE 0100	Erection of low voltage installations
EN 60598-1	Luminaires – part 1: general requirements and tests
EN 61347-1	Operating devices for lamps – part 1: general and safety requirements
EN 61347-2-1	Control gear for lamps; part 2-1: special requirements for ignitors (other than glow starters)
EN 61347-2-9	Control gear for lamps; part 2-9: special requirements for ballasts for discharge lamps (except fluorescent lamps)
EN 60923	Ballasts for discharge lamps – performance requirements
EN 60927	Operating devices for lamps; ignitors (glow starters); performance requirements
EN 61048	Operating devices for lamps – capacitors for fluorescent lamp circuits and other discharge lamp circuits; general and safety requirements
EN 61049	Operating devices for lamps – capacitors for fluorescent lamp circuits and other discharge lamp circuits; performance requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61000-3-2	Electromagnetic Compatibility (EMC) – part 3: maximum values – main section part 2: maximum values for mains harmonics (device input current up to and including 16 A per conductor)
EN 61547	Installations for general lighting purposes – EMC immunity requirements

## Technical specifications

### Operating voltage range

Control gear units can be operated at the specified mains voltage within a tolerance range of  $\pm 10\%$  for HS/HI lamps and  $\pm 3\%$  for C-HI lamps.

### Leak current $\leq 0.1$ mA

### Compensation/power factor

Parallel-compensated control gear units with a power factor of  $\lambda < 0.9$  ( $\lambda < 0.85$  for 100 W)

### Degree of protection

IP40, IP65

IP54 for aluminium casing

### Protection class

Independent, protection class II control gear units (plastic casing)

Independent, protection class I control gear units (aluminium casing)

### Max. ambient temperature

See  $t_a$  value on the type plate of the control gear unit

### Lead length to lamp

Max. 10 m

### "F" designation

Suitable for mounting on surfaces of normal flammability

## Mechanical mounting

### Mounting position

Any position using the mounting tabs

### Clearance

Min. of 0.20 m from walls, ceilings and insulation

Min. of 0.20 m from further control gear units

Min. of 0.25 m from sources of heat (lamp)

### Surface

Solid; control gear unit must not be allowed to sink into insulation materials

## Electromagnetic compatibility (EMC)

### Interference

Interference voltage measurements only have to be taken at the connection terminals for luminaires with electromagnetic control gear units as these systems operate with lamp voltages of under 100 Hz. These low-frequency interference voltages are generally not critical with high-pressure discharge lamps with electromagnetic control gear units.

### Interference immunity

Thanks to the robust design and choice of materials, electromagnetic control gear units provide a high degree of interference immunity and are not impaired by normal mains power interference.

### Mains Harmonics

After every zero crossing of the lamp current, discharge lamps experience a re-ignition peak as the lamps go out for a brief (imperceptible) moment. These re-ignition peaks of discharge lamps generate mains harmonics that are smoothed by the ballast's impedance. VS electromagnetic control gear units all comply with the stipulated maximum values.

1

2

3

4

5

6

7

8

9

10

## Selection of automatic cut-outs for VS control gear units

### Dimensioning automatic cut-outs

When a control gear unit is switched on, high transient current peaks occur due to the smoothing capacitor having to load. The lamps are ignited almost simultaneously, which also causes energy consumption peaks. These high system switch-on currents put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.

**Release reaction** The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B and C characteristics.

### No. of control gear units

The following values are meant as guidelines only and may vary depending on the respective lighting system. The specified maximum number applies to the number of devices that can be switched on simultaneously. Specifications apply to single-pole fuses; using multi-pole fuses reduces the maximum number by 20%. The considered circuit impedance equals 400 mΩ (approx. 20 m [2.5 mm<sup>2</sup>] of conductor from the power supply to the distributor and a further 15 m to the luminaire). Doubling circuit impedance to 800 mΩ increases the possible number of control gear units by 10%.

Type of control gear unit	Type of automatic cut-out			
	B (10 A)	B (16 A)	C (10 A)	C (16 A)
VNaHJ 35PZT	7	12	12	20
VNaHJ 70PZT	7	12	12	20
VNaHJ 100PZT	6	10	10	16
VNaHJ 150PZT	5	8	8	14
VNaHJ 250PZT	3	5	5	7
VNaHJ 400PZT	2	4	3	5

## Safety functions

### Shutdown of defective lamps

In the event of a lamp failing to ignite the control gear unit will automatically shut down after a preset safety period. The programmed switch off time prevents flickering at the end of the lamp's service life. The control gear unit can be reset after shut down and lamp changing by disconnecting and then reconnecting the mains voltage.

### Temperature protection

To protect against impermissible excess temperatures, the devices are fitted with a temperature fuse.

### Protection against installation and wiring errors

The integrated IPP<sup>++</sup> function will prevent the power unit from making any attempt to start the lamp in the event of an installation or wiring error and also if the neutral conductor is dislodged within the existing mains voltage network (three-phase supply network). Should the nominal supply voltage be connected, the power unit will begin starting the lamp immediately.

## Reliability and service life

The control gear units can be expected to provide a service life of 50,000 operating hours provided that the assembly instructions are observed and the maximum tw value of the ballast is not exceeded. Failure rate:

< 0.1%/1,000 hrs

## Electrical installation

### Connection terminals

Terminals can be contacted with rigid or flexible conductors

- Rigid conductors: max. 2.5 mm<sup>2</sup>
- Flexible conductors: max. 2.5 mm<sup>2</sup>
- Stripped lead length: 10–11 mm
- Conductors must not be tin-plated

### Connection leads

Admissible diameter 7–9 mm

The suitability of luminaire conductors and cables for use within luminaires with ignition devices must be checked in accordance with luminaire standard EN 60598-1 10.2.2.

In general, all silicone and standard PVC cables meet these requirements.

### Wiring

The wiring between the supply mains, control gear unit and lamp must be in accordance with the circuit diagram shown on the type plate.

Note: luminaire casing (metal) must be connected to the protective earth conductor.

## Assembly Instructions for Electromagnetic Ballasts

### For mounting and installing electromagnetic ballasts for high-pressure discharge lamps

#### Mandatory regulations

DIN VDE 0100	Erection of low voltage installations
EN 60598-1	Luminaires – part 1: general requirements and tests
EN 61347-1	Operating devices for lamps – part 1: general and safety requirements
EN 61347-2-9	Operating devices for lamps; part 2-9: special requirements for ballasts for discharge lamps (except fluorescent lamps)
EN 60923	Ballasts for discharge lamps – performance requirements
EN 55015	Maximum values and methods of measurement for RFI suppression in electrical lighting installations and similar electrical appliances
EN 61000-3-2	Electromagnetic Compatibility (EMC) – part 3: maximum values – main section part 2: maximum values for mains harmonics (device input current up to and including 16 A per conductor)
EN 61547	Installations for general lighting purposes – EMC immunity requirements

1

2

3

4

5

6

7

8

9

10

## Technical specifications

### Operating voltage range

The ballasts can be operated at the specified mains voltage within a tolerance range of  $\pm 10\%$  for HS/HI and HM lamps and  $\pm 3\%$  for C-HI lamps.

### Leak current $\leq 0.1$ mA

### Compensation/power factor

Inductive ballasts:  $\lambda \leq 0.5$

Parallel-compensated ballasts:  $\lambda \geq 0.85$

## Mechanical mounting

### Mounting position

Any

### Mounting location

Ballasts are designed for installation in luminaires or comparable devices. Independent ballasts do not need to be installed in a casing.

### Fastening

Preferably using M4 to M6 screws, depending on the size of the ballast. Encapsulated ballasts may only be used with flat-headed screws (M5), underlaid with a washer (DIN 9021). (Tightening torque  $\approx 2$  Nm)

### Temperature

The winding temperature  $t_w$  must be checked during operation and must not exceed the specified maximum value. It must be tested by using the standardised method of measuring resistance. The  $\Delta t$  marking on the type plate is a measure of the ballast's inherent heating and thus of its power loss. The lower this value is the lower the power loss of the ballast. This value is determined using standardised measuring regulations and constitutes a benchmark for comparing ballasts of the same design for selection purposes.

## Electromagnetic compatibility (EMC)

### Interference

Interference voltage measurements have to be taken at the connection terminals for luminaires with electromagnetic ballasts as these are systems that operate with lamp voltages of under 100 Hz. These low-frequency interference voltages are generally not critical with high-pressure discharge lamps with electromagnetic ballasts.

### Interference immunity

Thanks to the robust design and choice of materials, electromagnetic ballasts provide a high degree of interference immunity and are not impaired by normal mains power interference.

### Mains Harmonics

After every zero crossing of the lamp current, discharge lamps experience a re-ignition peak as the lamps go out for a brief (imperceptible) moment. These re-ignition peaks of discharge lamps generate mains harmonics that are smoothed by the ballast's impedance. VS electromagnetic ballasts all comply with the stipulated maximum values.

## Selection of automatic cut-outs for VS electromagnetic ballasts

### Dimensioning automatic cut-outs

When a ballast is switched on, high transient current peaks occur due to parasite capacitances that can accumulate with the number of luminaires. These high system switch-on currents put a strain on the automatic conductor cut-outs. For this reason, only surge-current-proof automatic cut-outs should be used for lighting systems.

# Technical Details – Components for Discharge Lamps

**Release reaction** The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B and C characteristics.

**No. of ballasts** The following values are meant as guidelines only and may vary depending on the respective lighting system. The maximum number of VS ballasts applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible ballasts must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m of [2.5 m<sup>2</sup>] conductor from the power supply to the distributor and a further 15 m to the luminaire). Doubling circuit impedance to 800 mΩ increases the possible number of ballasts by 10%. The values quoted in the following tables are guidelines and can be affected by system-specific factors.

Possible number of ballasts connected to automatic cut-outs with or without compensation

Lamp data		C <sub>p</sub> μF	Max. number of ballasts connected to automatic cut-outs - without compensation / with compensation																			
W	V		C10		C13		C16		C20		C25		B10		B13		B16		B20		B25	
			without	with	without	with	without	with	without	with	without	with	without	with	without	with	without	with	without	with	without	with
<b>Mercury vapour lamps (HM)</b>																						
50	230	7	10	19	13	25	15	31	18	39	23	49	8	10	11	12	13	15	16	18	20	23
80	230	8	6	12	7	15	9	19	11	24	14	30	6	6	8	7	10	9	12	11	15	14
125	230	10	4	7	5	9	7	12	7	15	9	19	4	4	5	5	7	6	9	7	10	9
250	230	18	2	4	3	5	3	6	3	7	4	9	2	2	3	2	3	3	4	3	5	4
400	230	25	1	2	1	3	2	4	2	5	2	6	1	1	1	1	2	2	3	2	3	2
700	230	40	–	1	–	1	1	2	1	2	1	3	1	–	1	–	1	1	1	1	2	1
1000	230	60	–	1	–	1	–	1	1	2	1	2	–	–	–	–	1	–	1	1	1	1
<b>Metal halide lamps (HI)</b>																						
35	230	6	11	22	14	29	18	36	23	45	29	50	9	11	12	14	15	18	18	23	23	27
70	230	12	7	12	9	15	11	18	14	23	17	29	5	8	6	10	8	13	9	16	12	20
100	230	12	6	10	7	13	9	16	11	20	14	25	4	7	5	9	6	11	8	14	10	17
150	230	20	4	7	5	9	6	11	7	14	9	17	2	5	3	6	4	8	5	10	6	12
250	230	32	2	5	2	6	3	7	4	9	5	11	1	3	1	4	2	5	3	6	4	8
400	230	35	2	3	2	4	3	5	4	7	5	8	1	2	1	3	2	4	2	5	3	6
1000	230	85	–	1	–	1	1	1	1	3	1	3	–	–	–	–	–	1	1	1	1	2
2000	380	60	–	1	–	1	–	2	–	2	–	3	–	–	–	–	–	1	–	1	–	2
2000	380	37	–	–	–	–	–	1	–	1	–	2	–	–	–	–	–	–	–	1	–	1
3500	380	100	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
<b>High pressure sodium vapour lamps (HS)</b>																						
35	230	6	11	22	14	29	18	36	23	45	29	50	9	11	12	14	15	18	18	23	23	27
50	230	10	9	16	11	20	14	24	18	31	22	38	6	11	8	14	10	17	13	22	16	27
70	230	12	7	12	9	15	11	18	14	23	17	29	5	8	6	10	8	13	10	16	12	20
100	230	12	6	10	7	13	9	16	11	20	14	25	4	7	5	9	6	11	8	14	10	17
150	230	20	4	7	5	9	6	11	7	14	9	17	2	5	3	6	4	8	5	10	7	12
250	230	36	2	5	2	6	3	7	4	9	5	11	1	3	1	4	2	5	3	6	4	8
400	230	45	1	3	1	3	2	4	3	5	4	7	1	2	1	2	1	3	2	4	2	5
600	230	60	1	2	1	2	1	2	2	3	2	4	–	1	–	1	1	2	2	2	2	3
1000	230	100	1	1	1	1	1	1	1	2	2	3	–	–	–	–	–	1	1	1	1	2

## Safety functions

The VS range includes ballasts with an integrated temperature switch that safely disconnects the lamp from the power supply if the lamp should develop the rectifier effect towards the end of its service life. The cut-out behaviour of the temperature switch is influenced by the luminaire construction. The luminaire manufacturer is responsible for checking the factory settings of the temperature switch in accordance with EN 60598-1 Section 12.5. VS can adjust the temperature switch to the appropriate cut-out temperature to suit requirements.


## Reliability and service life

Provided the maximum winding temperature is not exceeded, the ballasts can be expected to yield a service life of 100,000 operating hours. Failure rate < 0.025 %/1,000 hrs


## Electrical installation

- Push-in terminals    Terminals can be contacted with rigid conductors up to a maximum of 1.5 mm<sup>2</sup>.
- Screw terminals    • Terminals can be contacted with rigid or flexible conductors with ferrules on bare end of core  
• Conductor cross-sections are determined by the terminals and can vary according to type 0.5-1.5 mm<sup>2</sup> / 0.75-2.5 mm<sup>2</sup> / 1.5-2.5 mm<sup>2</sup>  
• Stripped lead length: 8 - 9 mm  
• Conductors must not be tin-plated  
• Max. tightening torque 0.5 Nm
- Wiring    The wiring between the power supply, ballast and lamp must be in accordance with the respective circuit diagram (see pages 105-107).
- Components    High-pressure discharge lamps must only be fitted with components that are rated to withstand the respective ignition voltage.


## Circuit diagrams for high-pressure sodium lamps (HS) and metal halide lamps (HI)




Superimposed ignition of HS and HI lamps




Superimposed ignition of HS and HI lamps (ballasts with two alternative voltage tapping points)




Superimposed ignition of HS and HI lamps (ballasts with three alternative voltage tapping points)




Superimposed ignition of HS and HI lamps (ballasts with two alternative power tapping points)




Superimposed ignition of HS and HI lamps (ballasts with two alternative voltage and power tapping points)




Pulse ignition of standard HS lamps




Pulse ignition of HI lamps, ignition voltage 0.9 kV




Pulse ignition for HS and HI lamps

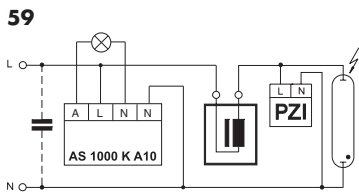


Start-up switch for HI lamps, ignition voltage 0.9 kV

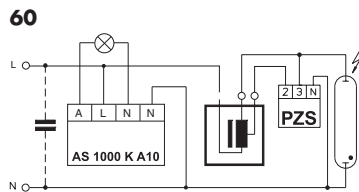


Start-up switch for standard HS lamps

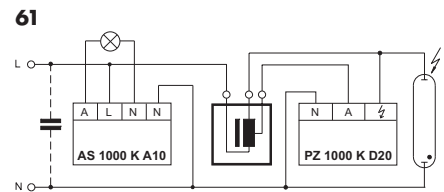


Start-up switch for HS and HI lamp

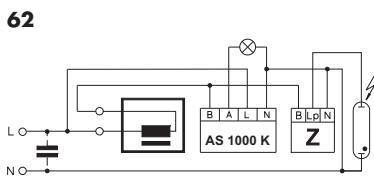


Start-up switch for HS and HI lamps




SDW-T lamps



HS lamps with internal ignitor (ballasts with two alternative voltage tapping points)



Superimposed ignition of HS and HI lamps with three alternative power tapping points



Superimposed ignition of HS and HI lamps with polyphase power systems

1

2

3

4

5

6

7


8

9


10




## Circuit diagrams for mercury vapour lamps (HM)




HM lamps




HM lamps (ballasts with two alternative voltage tapping points)



HM lamps (ballasts with two alternative power tapping points)




HM lamps (ballasts with two alternative voltage and power tapping points apiece)




Start-up switch for HM lamps with auxiliary lamp

## Power reduction of mercury vapour lamps (HM lamps)


$L_{ST}$  connectable to L1, L2 and L3




Disconnected control phase ( $L_{ST} = 0\text{ V}$ ) with ballasts with two tapping points




Connected control phase ( $L_{ST} = 230\text{ V}$ ) with ballasts with two tapping points




Disconnected control phase ( $L_{ST} = 0\text{ V}$ ) with ballasts with two tapping points




Connected control phase ( $L_{ST} = 230\text{ V}$ ) with ballasts with two tapping points

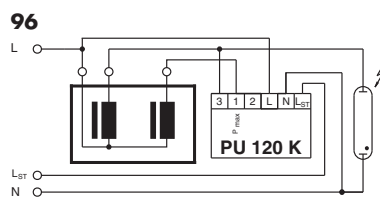

Disconnected control phase ( $L_{ST} = 0\text{ V}$ ) with two ballasts connected in parallel



Electronic power reduction without control phase




Ballasts with two tapping points and two voltage tapping points ( $L_{ST} = 0\text{ V}$  or  $L_{ST} > 0\text{ V}$ )

## Power reduction of high-pressure sodium lamps (HS lamps) – superimposed ignition system


L<sub>ST</sub> connectable to L1, L2 or L3

**80**

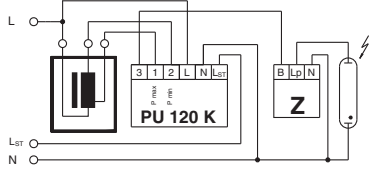


Disconnected control phase ( $L_{ST} = 0\text{ V}$ )  
with ballasts with two tapping point

**81**

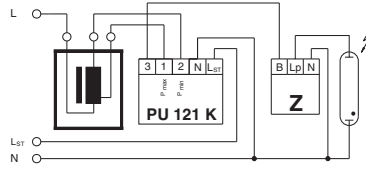


Connected control phase ( $L_{ST} = 230\text{ V}$ )  
with ballasts with two tapping points

**82**

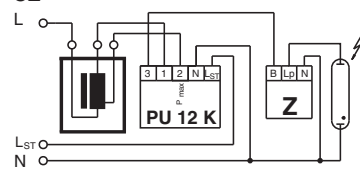


Disconnected control phase ( $L_{ST} = 0\text{ V}$ )  
with ballasts with two tapping points

**83**

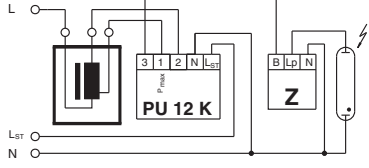


Connected control phase ( $L_{ST} = 230\text{ V}$ )  
with ballasts with two tapping points

**84**

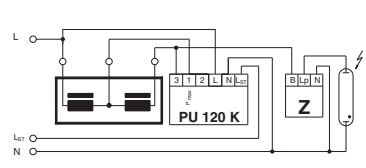


Disconnected control phase ( $L_{ST} = 0\text{ V}$ )  
with main ballast and additional inductance

**85**

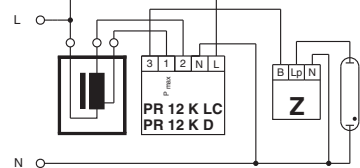


Electronic power reduction without control phase

**86**

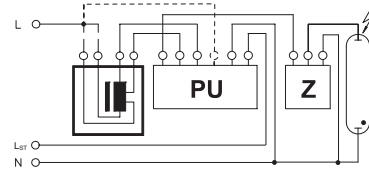

Ballast with two tapping points and two  
voltage tapping points ( $L_{ST} = 0\text{ V}$  or  $L_{ST} > 0\text{ V}$ )


**89**

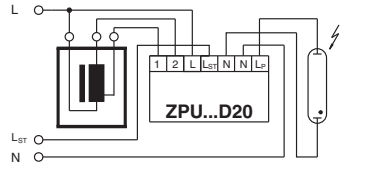

Disconnected control phase ( $L_{ST} = 0\text{ V}$ )  
with ballasts with two tapping points

## Power switching of LED drivers and electronic ballasts

**100**

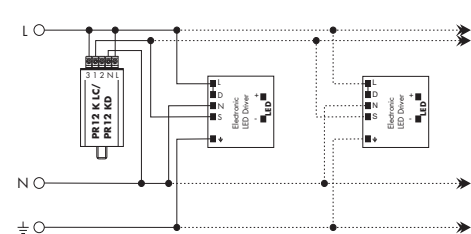

## Lampholders for High-pressure Discharge Lamps

Metal halide and high-pressure sodium lamps feature extremely different bases, which include RX7s, Fc2, G8.5, GX8.5, GU8.5, GX10, G12, GX12, PG12, PGJ5, GU6.5, E27 and E40, depending on whether the lamp is single- or double-ended. All lampholders are subject to the same typical conditions found with discharge lamps: high ignition voltages and temperatures. The high start-up currents deserve particular attention in lampholder design. This is also reflected by the insulation materials, which are usually solid ceramics or heat-resistant plastic (e.g. PPS – polyphenylene sulphide). Depending on the lamp's requirements (voltage, current, temperature, etc.), silver, nickel and copper alloys with thick nickel coatings are used as conductors. The luminaire regulation EN 60598-1 (VDE 0711 part 1), defines the safety requirements with regard to ignition voltages in connection with creepage and air clearance distances. Special care must be taken to ensure that lampholders are approved for discharge lamps when using high-pressure lamps with E27 and E40 Edison bases. Lampholders that are suitable for this purpose are marked with a maximum value of "5 kV" and comply with the increased creepage and air clearance distances specified by the lampholder requirements in EN 60238 (VDE 0616 part 1). The lampholder regulations governing special lampholders, EN 60838-1 (VDE 0616 part 5), apply analogously to all other base systems. The high ignition voltage pulses also place special demands on the conductors. In practice, silicone-insulated conductors with an outer diameter of 3.6 mm have proved to be suitable for discharge lamps. Silicone-insulated conductors with a glass-silk lining with a diameter of 7 mm should be used for lamps with an instant hot restart (20 kV) function.

When connecting lampholders to push-in terminals of ballasts, the diameter of the conductor and the length of the stripped cables must be taken into account to ensure correct operation of the installed components. To this end, Vossloh-Schwabe can make additional versions available with compacted cable ends as further options.

When using compacted cable ends, the reduction of the cable diameter at the end of the cable must be taken into account, which means that the respective ballast push-in terminal has to be capable of taking the next-smaller cable diameter (see table with examples).


When using screw terminals to connect a ballast, it is recommended to use a ferrules on the bare end of core.

Cable cross-section mm <sup>2</sup>	Push-in terminal range on the ballast when using compacted cable ends mm <sup>2</sup>
0.75	≥ 0.5
1	≥ 0.75


**VS lampholders for the UL market and UL approved leads are available for all common lamp types.**

**Further information can be found at [www.unvlt.com](http://www.unvlt.com).**


### Ferrule on bare end of core



### Compacted cable ends




### Bases for the most commonly used HI and HS lamps

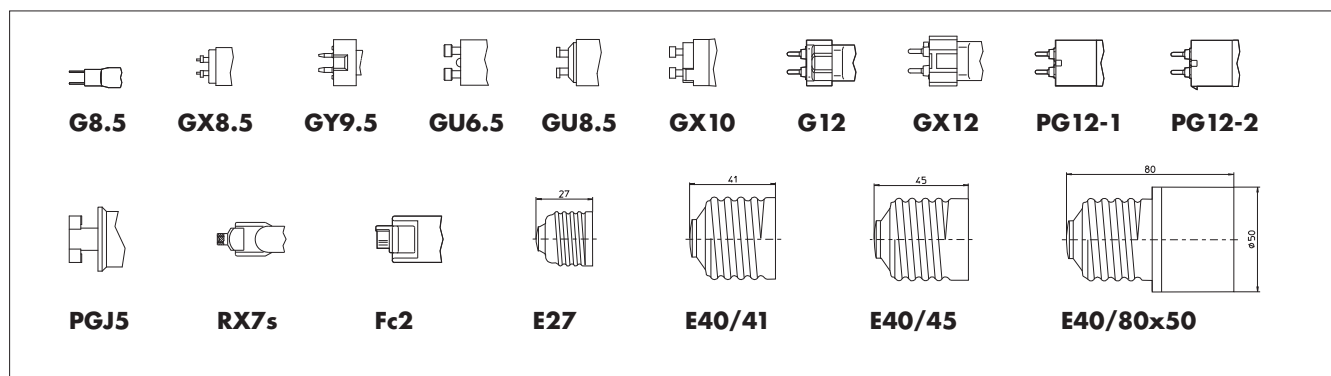

## Bases for the most commonly used HM lamps

Edison bases are predominantly used for mercury vapour lamps (HM)

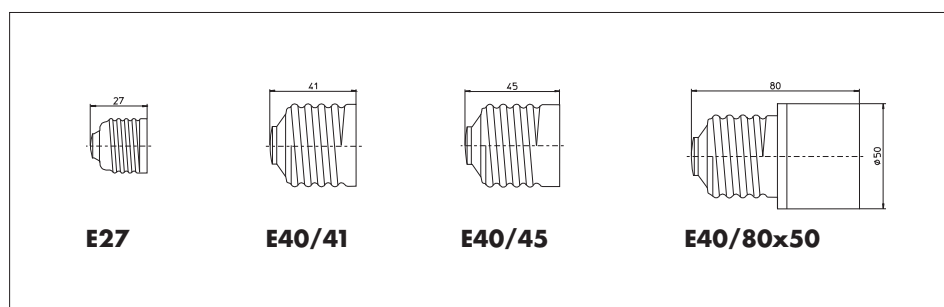

## Ignitors

### Ignition voltages for high-pressure sodium lamps (HS) and metal halide lamps (HI)

The ignition voltage of HS and HI lamps is determined by the respective lamp technology as well as the creepage and air clearance distances of the base-lampholder system. High-pressure sodium lamps of 35, 50 and 70 W with an E27 base are ignited with a voltage of between 1.8 and 2.3 kV. All other high-pressure lamps of the sodium and metal halide families require an ignition voltage of between 4 and 5 kV (except for special lamps and lamps with base PGJ5).



### Superimposed ignitors

Superimposed ignitors work independently of ballasts and generate defined ignition pulses within the voltage ranges of 220–240 V  $\pm$ 10% and 380–415 V  $\pm$ 10%. As the mains frequency only plays a minor role, these systems work equally well at 50 Hz and 60 Hz. In accordance with the lamp manufacturer's specifications, pulses or clusters of pulses of defined width and height are generated in every half wave. Although lamp current flows through superimposed ignitors, they only cause low losses in relation to the system's power consumption. The maximum ambient temperature can be calculated by subtracting the ignitor's self-heating, which is caused by the inherent losses, from the specified maximum casing temperature ( $t_c$ ).

Superimposed ignitors should be mounted near the lampholder. The clearance needed between the ignitor and the lamp is determined by the respective maximum load capacitance, which is specified for each ignitor in the technical specifications. The capacitive load of the cable is dependent on its physical properties and wiring layout; this value usually ranges between 70 pF and 100 pF per metre. The casing temperature must not fall below  $-30$  °C and must not exceed the maximum value specified on the device.

### Pulse ignitors

Pulse ignitors use the winding of an inductive ballast to generate the pulse voltage needed to ignite high-pressure discharge lamps. For that reason, ballasts must be designed to withstand these high ignition voltages. In this respect, special attention is paid to the insulation as well as the creepage and air clearance distances. As pulse ignition systems generate high-energy pulses, they are also suitable in the event of longer conductor distances between ignitor and lamp. State-of-the-art ignitors feature electronic circuitry. Depending on their design and the technical requirements, the simplest solution is to connect pulse ignitors in parallel with the lamp. Further models make partial use of the winding of a ballast, which will either feature multiple tapping points for voltage selection or special tapping points for pulse operation.



1

2

3

4

5

6

7

8

9

10

## VS ignitors provide the following advantages:

- fully electronic construction
- compact design
- large nominal voltage range
- large output range
- low self-heating
- minimal power loss
- low noise
- long service life
- high electrical safety due to high-quality components (e.g. approved capacitors)
- highly heat-resistant (max. permissible casing temperature  $t_c$ : 105 °C for superimposed ignitors and 95 °C for pulse ignitors)
- highly fire-resistant potting compound (certified according to EN 60926 and UL 94-V0)
- environmentally compatible potting compound (waste key No. 57110)

## Product range

Vossloh-Schwabe's product range covers superimposed and pulse ignitors in standard models and with automatic cut-outs. Superimposed ignitors with automatic cut-outs are available with various cut-out times and ignition voltage pulse mechanisms (A and D). In this respect, D-series ignitors featuring the intelligent pulse-pause mode (IPP) are the best solution in terms of ignition reliability and switching off defective lamps.

Electronic ignitors with integrated cut-outs capture data on ignition behaviour during the ignition process. These data, e.g. regarding ignition frequency or failure, serve to identify ageing lamps and to ensure the ignition process is reliably switched off after a defined period of time at the end of the lamp's service life or in the event of defective lamps. This reduces the negative consequences associated with defective lamps.

## Superimposed and Pulse Ignitors with Automatic Cut-out

### Ignitors with IPP technology and extended cut-out – D series

After connection to mains voltage, D series ignitors generate ignition voltage pulses that are controlled and if necessary switched off by the ignitor in accordance with the lamp's operating state, lamp recognition and the safe burning time. If the safe burning time is not attained after three consecutive ignition attempts, pulse generation will cease.

Appropriately programmed microprocessors enable these performance features of ignitors with IPP technology (Intelligent Pulse-Pause Mode) and extended cut-outs.

#### **Z ... D20/**

**PZ ... D20** for HS, HI and C-HI lamps  
programmed cut-out time: 1,216 seconds

Ignitors with IPP technology and extended cut-outs are available up to an output of 1,000 W.

## Programmed cut-out function of VS ignitors



## Ignitors with automatic cut-out – A series

After connection to mains voltage, A series ignitors supply a continuous stream of ignition voltage pulses until the lamp has ignited or the predefined cut-out time (sum of all ignition periods) has been reached if the lamp fails to ignite.

**PZ ... A5** for HSI lamps  
programmed cut-out time: ca. 300 seconds

## Pulse ignition systems – overview of technical specifications

For HS, HI and C-HI lamps – PZ 1000 K D20




for high-pressure sodium lamps (HS) 50–1000 W,  
metal halide lamps (HI) 35–1000 W and  
for ceramic discharge tube lamps (C-HI) 35–400 W  
Ignition voltage: 1.8–2.3 kV or 4–5 kV  
No. of pulses: 2 per mains period  
Load capacitance: 20–1000 pF  
Ignitors with automatic cut-out and IPP technology  
Suitable ballast types: NaHJ ... PZT with special winding tapping point,  
whose position is determined by the magnitude of the ignition voltage

For HS lamps – PZS 1000 K

for standard high-pressure sodium lamps (HS) 50–1000 W  
Not suitable for discharge lamp models SUPER, PLUS, XL, etc.  
Ignition voltage: approx. 4 kV  
No. of pulses: 1 per second  
Load capacitance: 20–4000 pF  
Suitable ballast types:  
NaH ... P with winding tapping point  
(20 V voltage difference)

For HI lamps – PZI 1000/1 K

for metal halide lamps (HI)  
with an ignition voltage up to 0.9 kV  
No. of pulses: 1 per mains period  
Load capacitance: max. 10,000 pF  
Suitable ballast models: Q...

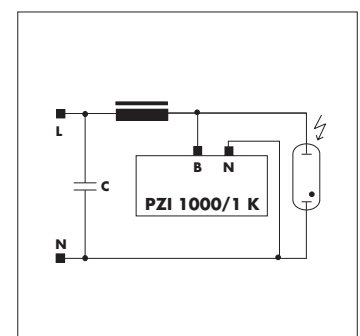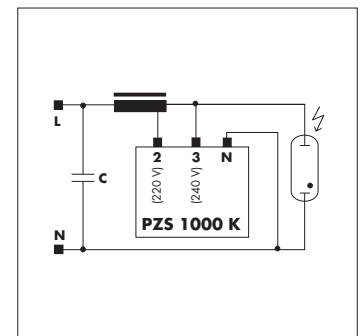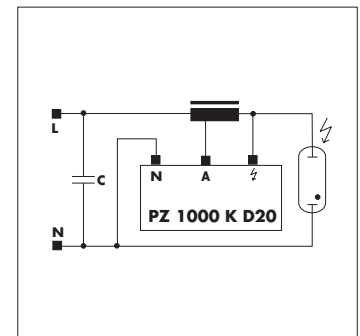

1

2

3

4

5

6

7

8

9

10

## Assembly Instructions for Ignitors

### For mounting and installing ignitors

#### Mandatory regulations

DIN VDE 0100	Erection of low voltage installations
EN 60598-1	Luminaires – part 1: general requirements and tests
EN 61347-1	Operating devices for lamps – part 1: general and safety requirements
EN 61347-2-1	Control gear for lamps; part 2-1: special requirements for ignitors (other than glow starters)
EN 60927	Control gear for lamps; ignitors (other than glow starters); performance requirements
EN 55015	Maximum values and methods of measurement for RFI suppression in electrical lighting installations and similar electrical appliances
EN 61000-3-2	Electromagnetic Compatibility (EMC) – part 3: maximum values – main section part 2: maximum values for mains harmonics (device input current up to and including 16 A per conductor)
EN 61547	Installations for general lighting purposes – EMC immunity requirements

#### Technical specifications

##### Operating voltage range

Ignitors can be operated at the specified mains voltage within a tolerance range of  $\pm 10\%$ .

##### Max. casing temperature $t_c$

A maximum casing temperature  $t_c$  of 105 °C or 95 °C is specified for superimposed ignitors and pulse ignitors, respectively. Tests carried out during operation must ensure this maximum value is not exceeded. Selecting an ignitor for higher lamp currents can reduce self-heating and thus also the temperature at the  $t_c$  measuring point. Details regarding self-heating can be found in the following table. The temperature structure in the luminaires is negatively influenced by ageing lamps.

##### Minimum ambient temperature $t_a$

The minimum ambient temperature  $t_a$  for all superimposed and pulse ignitors is -30 °C. Ignitors for use in applications with special requirements to the ambient temperature (for example -40 °C) are available on request.

## Superimposed ignitors – Technical specifications

Voltage V/Hz	Ignitor type	Max. lamp current A	Power loss W	Inherent heating K	Ignition voltage kV	Max. load capacity pF	Max. conductor length between ignitor and lamp* m	Connection terminals (mm <sup>2</sup> )		Casing material	Dimensions (dia. x L or L x W x H) length without threaded stud mm
								Screw	Push-in		
220-240/ 50-60	<b>Z 70 S</b>	2	< 0.6	< 5	1.8-2.3	200	2	0.75-4	–	Al	Ø35 x 76
	<b>Z 70 K</b>	2	< 0.6	< 5	1.8-2.3	200	2	0.75-4	–	PC	78 x 34 x 27
								–	0.5-2.5		81 x 34 x 27
	<b>Z 70 K D20</b>	2	< 0.6	< 5	1.8-2.3	200	2	0.75-4	–	PC	80 x 34 x 30
								–	0.5-2.5		83 x 34 x 30
	<b>Z 250 S</b>	3.5	< 1.8	< 20	4.0-5.0	100	1	0.75-4	–	Al	Ø35 x 76
	<b>Z 250 K</b>	3.5	< 1.8	< 20	4.0-5.0	100	1	0.75-4	–	PC	78 x 34 x 27
								–	0.5-2.5		81 x 34 x 27
	<b>Z 250 K D20</b>	3.5	< 1.8	< 20	4.0-5.0	100	1	0.75-4	–	PC	80 x 34 x 30
								–	0.5-2.5		83 x 34 x 30
	<b>Z 400 S</b>	5	< 3.0	< 25	4.0-5.0	100	1	0.75-4	–	Al	Ø45 x 76
	<b>Z 400 M</b>	5	< 3.0	< 35	4.0-5.0	50	0.5	0.75-4	–	Al	Ø35 x 76
	<b>Z 400 M VS-Power</b>										
	<b>Z 400 M S</b>										
	<b>Z 400 M K</b>	5	< 3.0	< 35	4.0-5.0	50	0.5	0.75-4	–	PC	78 x 34 x 27
								–	0.5-2.5		81 x 34 x 27
<b>Z 400 M K VS-Power</b>	5	< 3.0	< 35	4.0-5.0	50	0.5	0.75-4	–	PC	78 x 34 x 27	
							–	0.5-2.5		81 x 34 x 27	
<b>Z 400 S D20</b>	5	< 3.0	< 25	4.0-5.0	100	1	0.75-4	–	Al	Ø45 x 90	
<b>Z 400 M K D20</b>	5	< 3.0	< 35	4.0-5.0	50	0.5	0.75-4	–	PC	80 x 34 x 30	
							–	0.5-2.5		83 x 34 x 30	
<b>Z 750 S</b>	8	< 3.0	< 20	4.0-5.0	100	1	0.75-2.5	–	Al	Ø50 x 90	
<b>Z 1000 S</b>	12	< 6.0	< 35	4.0-5.0	100	1	0.75-2.5	–	Al	Ø50 x 80	
<b>Z 1000 TOP</b>										83 x 83 x 68	
<b>Z 1000 S D20</b>	12	< 6.0	< 35	4.0-5.0	100	1	0.75-2.5	–	Al	Ø50 x 89	
<b>Z 1000 L</b>	12	< 6.0	< 35	4.0-5.0	2000	20	0.75-2.5	–	Al	Ø50 x 97	
<b>Z 1200/2,5</b>	15	< 7.5	< 40	2.0-2.5	200	2	0.75-2.5	–	Al	Ø50 x 87	
<b>Z 1200/9</b>	15	< 10.0	< 40	7.0-8.0	50	0.5	0.75-2.5	–	Al	Ø50 x 135	
<b>Z 2000 S</b>	20	< 6.0	< 30	4.0-5.0	100	1	0.75-2.5	–	Al	Ø65 x 96	
380-420/ 50-60	<b>Z 1000 S/400V</b>	6	< 3.3	< 28	4.0-5.0	2000	20	0.75-2.5	–	Al	Ø45 x 100
	<b>Z 2000 S/400V</b>	12	< 5.0	< 32	4.0-5.0	2000	20	0.75-2.5	–	Al	Ø50 x 98
	<b>Z 3500 S/400V</b>	20	< 7.0	< 35	4.0-5.0	100	1	0.75-2.5	–	Al	Ø65 x 96

\* With a conductor of, for instance, 100 pF per m (3x2.5 mm<sup>2</sup>)

## Pulse ignitors – Technical specifications

Nominal voltage/ frequency V/Hz	Pulse ignitor type	Casing temperature t <sub>c</sub> °C	Ignition voltage kV	Max. load capacity pF	Max. conductor length between ignitor and lamp* m	Connection screw terminals mm <sup>2</sup>	Casing material	Dimensions (dia. x L or L x W x H) length without threaded stud mm
220-240/50-60	<b>PZS 1000 K</b>	95	approx. 4	4000	40	0.5-1.5	PC	50 x 28 x 27
220-240/50-60	<b>PZ 1000 K D20</b>	95	1.8-2.3/ 4.0-5.0	1000	10	0.75-2.5	PC	74 x 34 x 27
220-240/50-60	<b>PZI 1000/1 K</b>	95	0.7-0.9	10000	100	0.5-2.5	PC	57 x 28 x 27
380-420/50-60	<b>PZ 1000/400 V A5</b>	95	4.0-5.0	800	8	0.75-2.5	Al	Ø40 x 80

\* With a conductor of, for instance, 100 pF per m (3x2.5 mm<sup>2</sup>) – wiring must be taken into consideration



## Mechanical mounting

Mounting position Any

Mounting location

Ignitors are designed for installation in luminaires or comparable constructions. Ignitors must be protected against radiation of direct lamp heat by appropriate installation.

Clearance from lamp

The clearance needed between ignitor and lamp is determined by the load capacitance of the conductors and by the type of ignitor pulses. The table on page 113 gives details of the clearance needed for a typical 3-phase lead with a cross-section of 2.5 mm<sup>2</sup> per conductor.

Casing materials Unmarked in the type description: aluminium; marked "K": polycarbonate

Fastening Via threaded stud M8x10 (Z 2000 S, Z 3500 S/400 V: M12x12)

Dimensions The table on page 113 provides details of ignitor dimensions.

## Electromagnetic compatibility (EMC)

Interference Ignitors only generate interference due to the high ignition voltages during lamp ignition. This is classified as click interference and is not evaluated in lighting technology. However, as this interference occurs continuously in the event of old lamps that fail to ignite, operators of lighting systems are legally obliged to exchange such lamps.

Interference immunity

Owing to their design and the materials used, VS ignitors are characterised by high interference immunity and comply with the specified maximum values.

Mains harmonics Are not observed during lamp ignition. VS ignitors meet the requirements.

## Reliability and service life

The service life of an ignitor is dependent on strict compliance with the casing temperature  $t_c$  during operation. As the ignitors are only subjected to loads during high-voltage lamp ignition, a service life of 10 years can be expected provided the  $t_c$  values are not exceeded. Failure rate: < 0.04%/1,000 hrs

## Electrical installation

Connection terminals

Ignitors feature screw or push-in terminals. For screw terminals a maximum torque value of 0.8 Nm must not be exceeded when connecting the conductor. Push-in terminals are for rigid conductors with a cross section of 0.5–2.5 mm<sup>2</sup> or respective flexible conductors with ferrule bare end of cores. Stripped lead ends of 8–9 mm are required. Tinned lead ends are not permitted. The permissible conductor cross-sections can be seen in the table on page 113.

Wiring

The ignitors must be wired between ballast and lamp in accordance with the circuit diagrams on pages 105–107. The load capacitances of the wiring must also be taken into account. Distances to lamps should be kept as short as possible.

## Power switches for street lighting

In view of the drive to cut public spending on energy and also in the light of environmental policies to protect resources, reducing the power consumption of high-pressure discharge lamps is becoming increasingly important.

Power reduction is possible on high-pressure sodium vapour and mercury vapour lamps and is realised with the aid of electronic actuators or by switching the inductance in the luminaire itself with the aid of power switches.

Provided that the lamp still emits an acceptable minimum of light output and uniformity, these lamps can be used to reduce the lighting level of outdoor lighting systems during off-peak traffic periods (e.g. in accordance with DIN 5044 for street lighting). In conjunction with the appropriate ballasts, the VS power switches constitute a perfect all-round solution for power switching purposes. This VS system has been approved by leading lamp manufacturers.

## Power switch PR 12 K LC – Power reduction without control line

The new VS PR 12 K LC power switch is capable of setting the period of power-reduced operation based on the measured burning time of a lighting system. This eliminates the time-consuming task of continually adjusting the times of power-reduced operation to suit constantly changing day-night cycles; it also removes the need for making adjustments due to daylight-saving times and is thus suitable for use worldwide (regionally independent).

## Function


The intelligent PR 12 K LC power switch does not require a control line to reduce lamp output; it uses the tapping of the ballast. Thanks to an integrated microprocessor, the PR 12 K LC power switch can measure the burning time of the luminaire. This value is then compared to data stored on the chip and used to set the time at which the luminaire will switch over to power-reduced operation. The luminaire will be operated at reduced power for a minimum of six hours (reduced by approx. 40% of the lamp's nominal rating at 50% of luminous flux). This period of power reduction can be extended to a maximum of 10 hours.

## Setting periods of power-reduced operation

The power switch is delivered in its default setting – i.e. the dial is set to 'Test (Code 0)'. After the luminaire has been installed, the desired power reduction time must be set using the dial on the power switch. The power-reduction period can be set to a minimum of six hours and can be extended by up to two hours in both directions (i.e. earlier or later). This results in a maximum power-reduction period of 10 hours.

The dial enables the following settings:

Dial settings	t <sub>1</sub>	Basic power	t <sub>2</sub>	Total power	
Position	Timings	reduction period (hrs)	Hours	reduction time (hrs)	
0	Test	Factory setting: 5 seconds on full load, followed by power reduction			
1	0/0	6	0	6	
2	0/1	6	1	7	
3	0/2	6	2	8	
4	0.5/0	6	0	6.5	
5	0.5/1	6	1	7.5	
6	0.5/2	6	2	8.5	
7	1/0	6	0	7	
8	1/1	6	1	8	
9	1/2	6	2	9	
A	1.5/0	6	0	7.5	
B	1.5/1	6	1	8.5	
C	1.5/2	6	2	9.5	
D	2/0	6	0	8	
E	2/1	6	1	9	
F	2/2	6	2	10	

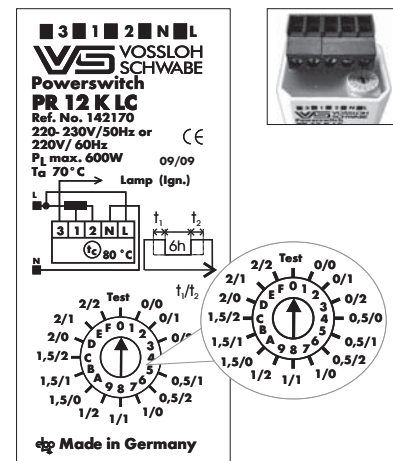

1

2

3

4

5

6

7

8


9

10

## Determining operating/power reduction periods

- The dial is set to the desired period of power reduction, e.g. to position 1 (0/0), which corresponds to a power-reduction period of six hours.
- In the first night, the luminaire is activated by the twilight switch (e.g. at 20:30 hours) and will operate at its nominal rating. After four hours (default setting), the luminaire will be switched down by 40% of the lamp output by the power switch and will then remain in power-reduced operation until the twilight switch turns the system off (e.g. at 06:30 hours).
- During this time, the power switch will measure the entire burning time of the lamp (10 hours in our example).
- The power switch then compares the measured burning period with values stored on the microprocessor. The integrated comparative values of the power switch form the basis for the starting point of power-reduced operation for the following night. The "new" starting time will then be stored by the power switch until the following night.
- In the second night, the lighting system – controlled by the twilight switch and thus dependent on the day/night cycle of the respective region and the time of year – will be activated (and deactivated) at a slightly different time as compared to the first night (either earlier or later, depending on the season)
- With the dial set to position 1, the power switch will thus activate the six-hour period of power-reduced operation after two hours, as per our example, and will then revert to nominal operation before the twilight switch finally sends the signal to switch the lighting system off.
- During the night, the power switch will again measure the entire burning time, compare this value with the stored values and then reset the starting time for power-reduced operation.
- The period of power-reduced operation can be adjusted by changing the dial setting. This period can be extended in both directions (i.e. earlier or later) as detailed in the table on page 115.
- If the dial is, for instance, set to 9 (1/2) this will produce a total period of power-reduced operation of 9 hours (1+6+2). As a result, power-reduced operation will begin one hour earlier than the value determined the night before would ordinarily prescribe and will then extend the minimum period of power-reduced operation by two hours.
- If, in very rare cases, the total burning period of the lighting system should remain under six hours per night, the power switch will activate power-reduced operation after 15 minutes of nominal operation and stay in power-reduced mode until the lighting system is switched off. Switching diagram for power reduced operation.

## Switching diagram for power reduced operation

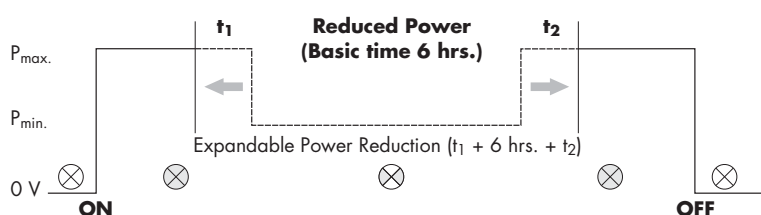

## Deactivating reduced-power operation for the night

The functional scope of the PR 12 K LC power switch has been extended with an extra function that permits the operator to deactivate reduced-power operation of the lighting system for a single night. The function can be useful for local festivities or events (e.g. town fêtes) during which it would not be appropriate to operate the local street lighting system at reduced power for safety reasons.

The power switch can be easily programmed to operate the lighting system at normal (i.e. 100%) power for the immediately following night cycle. The power switch is programmed by briefly switching the lighting system on for a period of min. 60 and max. 90 seconds during the day of the event and then switching it off again. The intelligent power switch recognises this command and sets the usual reduced-power operation to zero. The power switch can be successively programmed in this manner as many days in a row as necessary. For every night the lighting system is to be operated at normal (100%) power, the lighting system will have to be switched on for a period of min. 60 and max. 90 seconds during the day. The lighting system will be operated at normal (100%) power in the respective night following day-time activation of the extra function.

The power switch does not need to be reprogrammed to return to power-reduced operation of the lighting system. The power switch will automatically return to its original (power-reducing) program if the lighting system is not switched on during the day for a period of min. 60 and max. 90 seconds.

Before testing the extra function, it is important to ensure that the power switch has been in operation for at least one night cycle. Only then will the "learning cycle" start that is required to perform the basic function. After that, the extra function can be activated as described above.

## Luminaire testing

The 'Test (Code 0)' dial setting on the power switch is used for luminaire testing during production as well as for direct function tests for "subsequent" installation in the lighting system. After the luminaire is switched on, the lamp is first operated at its nominal rating. After only five seconds, the system will be switched over to power-reduced operation, which will produce a visible change even though the lamp will not yet have attained its full output.

## Maintenance work on the lighting system

Maintenance work that requires the lighting system to be switched on for a period of less than two hours will not influence the settings of power switch PR 12 K LC.

Should the lighting system need to be switched on for more than two hours during maintenance work, the PR 12 K LC power switch will activate power-reduced operation after 15 minutes of nominal operation in the following night and will then start to re-measure the total burning time of the lighting system. To determine the starting time of power-reduced operation for subsequent nights, the power switch will again use the stored comparative values.

# Switch Units

## For power reduction using electronic ballasts with a 1–10 V interface

### Suitable for a broad range of lamps

Vossloh-Schwabe's switch units are designed to enable one-step power reduction of lamps (FL, CFL, LED, HS, HI and C-HI) with the help of the respective electronic ballast or converter. To this end, the switch units utilise the 1–10 V interface of the control gear unit. The switch unit is mainly intended for outdoor luminaires in systems with or without a control phase.

Discharge lamps may only be operated at reduced power if they have been expressly approved for this purpose by the manufacturer. In addition, the unit can also be used to dim tubular and compact fluorescent lamps as well as LEDs.

The 1–10 V interface is addressed via an external circuit at the output of the switch unit using a suitably dimensioned resistor. The type of resistor and circuitry are selected by the luminaire manufacturer to suit the desired degree of power reduction.

The switch unit satisfies the provisions of DIN EN 61347 and is suitable for use in outdoor luminaires of protection classes I and II.

1

2

3

4

5

6

7

8

9

10

## Function PR 1-10 V K LC

The intelligent PR 1-10 V K LC switch unit does not require a control line to reduce lamp output.

Thanks to an integrated microprocessor, the PR 1-10 V K LC switch unit can measure the burning time of the luminaire. This value is then compared to data stored on the chip and used to set the time at which the luminaire will switch over to power-reduced operation.



The luminaire will be operated at reduced power for a minimum of six hours (reduced by approx. 40% of the lamp's nominal rating at 50% of luminous flux). This period of power reduction can be extended to a maximum of 10 hours.

## Setting periods of power-reduced operation for PR 1-10 V K LC


The PR 1-10 V K LC switch unit is delivered in its default setting – i.e. the dial is set to 'Test (Code 0)'. After the luminaire has been installed, the desired power reduction time must be set using the dial on the switch unit. The power-reduction period can be set to a minimum of six hours and can be extended by up to two hours in both directions (i.e. earlier or later). This results in a maximum power-reduction period of 10 hours.

The dial enables the following settings:


Dial Settings	t <sub>1</sub>	Basic power	t <sub>2</sub>	Total power	
Position	Timings	reduction period (hrs)	Hours	reduction time (hrs)	
0	Test	Factory setting: 5 seconds on full load, followed by power reduction			
1	0/0	6	0	6	
2	0/1	6	1	7	
3	0/2	6	2	8	
4	0.5/0	6	0	6.5	
5	0.5/1	6	1	7.5	
6	0.5/2	6	2	8.5	
7	1/0	6	0	7	
8	1/1	6	1	8	
9	1/2	6	2	9	
A	1.5/0	6	0	7.5	
B	1.5/1	6	1	8.5	
C	1.5/2	6	2	9.5	
D	2/0	6	0	8	
E	2/1	6	1	9	
F	2/2	6	2	10	



## Circuit diagrams for switch units

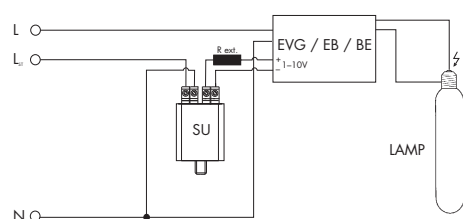

SU 1-10 V K

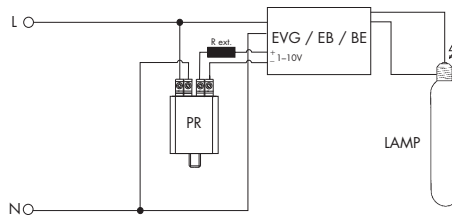

PR 1-10 V K LC

## Lamp Table for Discharge Lamps

### High-pressure sodium lamps (HS lamps)

Manufacturer	Designation	Base	Lamp current	Superimposed ignition system		Pulse ignition system		Instant restrike ignition system		Control gear unit	EB
				Ignitor	Ballast	Ignitor	Ballast	Ignitor	Ballast		
<b>Lamp output 35 W</b>											
Philips	SDW-T	PG12-1	0.48	ignitor/ stabiliser	NaH 35II	–	–	–	–	–	–
Sylvania	SHP-S...CO/E	E27	0.53	Z 70...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	–	–
<b>Lamp output 50 W</b>											
Aura	ST 50 W	E27	0.80	Z 70...	NaH 50	PZ 1000KD20	NaH 50PZT	–	–	VNaH 50	EHXd 50
Aura	SE 50 W	E27	0.80	Z 70...	NaH 50	PZ 1000KD20	NaH 50PZT	–	–	VNaH 50	EHXd 50
GE	IU...	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
GE	IU...XO	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
GE	IU...SBY	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Iwasaki	NH.../HV/...	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Narva	NA	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Narva	NA...D	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Osram	NAVE.../E	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Osram	NAVE...4Y	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Osram	NAV-T...Super 4Y	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Philips	SDW-T	PG12-1	0.78	ignitor/ stabiliser	NaH 50II	–	–	–	–	–	–
Philips	SON...Hg free	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Philips	SON...Pro	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Philips	SON-T...Plus	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Radium	RNP	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Sylvania	SHPS	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
Sylvania	SHP-TS	E27	0.76	Z 70...	NaH 50	PZ 1000KD20	–	–	–	–	EHXd 50
<b>Lamp output 70 W</b>											
Aura	ST 70 W	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Aura	SE 70 W	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
BLV	HST-SE	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
GE	IU	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
GE	IU...RFL	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
GE	IU...SBY	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
GE	IU...XO	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Iwasaki	NH.../HV/...	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Narva	NA	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Narva	NA...D	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Osram	NAVE.../E	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Osram	NAVE...4Y	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Osram	NAV-T	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Osram	NAV-T...4Y	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Osram	NAV-T...Super 4Y	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Osram	NAV-TS...Super 4Y	RX7s	0.98	Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	HZ 600K	NaHJ 70	VNaHJ 70	EHXd 70
Philips	SON...Hg free	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Philips	SON...Pro	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Philips	SON-T...Plus	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Philips	SON-T...Pro	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Radium	RNPE	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Radium	RNP-T	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Radium	RNP-TS	RX7s	0.98	Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	HZ 600K	NaHJ 70	VNaHJ 70	EHXd 70
Sylvania	SHP	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Sylvania	SHP-T	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Sylvania	SHP-TS	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Sylvania	SHP.../CO-E	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
Sylvania	SHP-S	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
<b>Lamp output 100 W</b>											
Aura	ST 100 W	E40	1.20	Z 250..., Z 400...	NaHJ100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Aura	SE 100 W	E40	1.20	Z 250..., Z 400...	NaHJ100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
BLV	HST-SE	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
GE	IU	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
GE	IU...SBY	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
GE	IU...XO	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Iwasaki	NH...F	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Iwasaki	NHT...F	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100

## Lamp Table for Discharge Lamps

### High-pressure sodium lamps (HS lamps)

Manufacturer	Designation	Base	Lamp current	Superimposed ignition system		Pulse ignition system		Instant restrike ignition system		Control gear unit	EB
				Ignitor	Ballast	Ignitor	Ballast	Ignitor	Ballast		
<b>Lamp output 100 W</b>											
Narva	NA	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Narva	NA...D	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Osram	NAVE	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Osram	NAVE...Super 4Y	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Osram	NAV-T	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Osram	NAV-T...Super 4Y	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Philips	SDW-T	PG12-1	1.30	ignitor/ stabiliser	NaH 100II	–	–	–	–	–	–
Philips	SON...Plus	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Philips	SON...Pro	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Philips	SON-T...Hg free	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Philips	SON-T...Plus	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Philips	SON-T...Pro	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Radium	RNPE	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Radium	RNP-T	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Sylvania	SHP-S	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Sylvania	SHP-T	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
Sylvania	SHP-TS	E40	1.20	Z 250..., Z 400...	NaHJ 100	PZ 1000KD20	NaHJ 100PZT	–	–	VNaHJ 100	EHXd 100
<b>Lamp output 150 W</b>											
Aura	ST 150 W	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Aura	SE 150 W	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
BLV	HST-DE	Fc2	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	HZ 600K	NaHJ 150	VNaHJ 150	EHXd 150
BLV	HST-DE	RX7s	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	HZ 600K	NaHJ 150	VNaHJ 150	EHXd 150
BLV	HST-SE	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
GE	IU	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
GE	IU...SBY	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
GE	IU...XO	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Iwasaki	NH	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Iwasaki	NHT	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Narva	NA	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Narva	NA...D	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Osram	NAVE	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Osram	NAVE...4Y	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Osram	NAVE...Super 4Y	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Osram	NAV-T	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Osram	NAV-T...4Y	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Osram	NAV-T...Super 4Y	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Osram	NAV-TS...Super 4Y	RX7s	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	HZ 600K	NaHJ 150	VNaHJ 150	EHXd 150
Philips	SON...Hg free	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Philips	SON...Plus	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Philips	SON...Pro	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Philips	SON...Comfort Pro	E40	1.82	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Philips	SON-T...Hg free	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Philips	SON-T...Plus	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Philips	SON-T...Pro	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Philips	SON-T...Comfort Pro	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Radium	RNPE	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Radium	RNP-T	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Radium	RNP-TS	RX7s	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	HZ 600K	NaHJ 150	VNaHJ 150	EHXd 150
Sylvania	SHP-S	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Sylvania	SHP-T	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
Sylvania	SHP-TS	E40	1.80	Z 250..., Z 400...	NaHJ 150	PZ 1000KD20	NaHJ 150PZT	–	–	VNaHJ 150	EHXd 150
<b>Lamp output 250 W</b>											
Aura	ST 250 W	E40	3.00	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	–	–	VNaHJ 250	EHXd 250
Aura	SE 250 W	E40	3.00	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	–	–	VNaHJ 250	EHXd 250
BLV	HST-DE	RX7s	3.00	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	HZ 600K	NaHJ 250	VNaHJ 250	EHXd 250
BLV	HST-SE	E40	3.00	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	–	–	VNaHJ 250	EHXd 250
GE	IU	E40	3.00	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	–	–	VNaHJ 250	EHXd 250
GE	IU...SBY	E40	3.00	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	–	–	VNaHJ 250	EHXd 250
GE	IU...TD	RX7s	2.95	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	HZ 600K	NaHJ 250	VNaHJ 250	EHXd 250
GE	IU...XO	E40	2.95	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	–	–	VNaHJ 250	EHXd 250

## Lamp Table for Discharge Lamps

### High-pressure sodium lamps (HS lamps)

Manufacturer	Designation	Base	Lamp current	Superimposed ignition system		Pulse ignition system		Instant restrike ignition system		Control gear unit	EB
				Ignitor	Ballast	Ignitor	Ballast	Ignitor	Ballast		
<b>Lamp output 250 W</b>											
Iwasaki	NH	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Iwasaki	NHT	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Narva	NA	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Narva	NA...D	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Osram	NAVE	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Osram	NAVE...4Y	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Osram	NAVE...Super 4Y	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Osram	NAV-T	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Osram	NAV-T...4Y	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Osram	NAV-T...Super 4Y	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Osram	NAV-TS	RX7s	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	HZ 600K	NaHj 250	VNaHj 250	EHXd 250
Philips	SON...Hg free	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Philips	SON...Plus	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Philips	SON...Pro	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Philips	SON...Comfort Pro	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Philips	SON-T...Hg free	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Philips	SON-T...Plus	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Philips	SON-T...Pro	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Philips	SON-T...Comfort Pro	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Radium	RNPE	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Radium	RNPT	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Sylvania	SHP	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Sylvania	SHP-T	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Sylvania	SHP-S	E40	2.95	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
Sylvania	SHP-TS	E40	2.95	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
<b>Lamp output 400 W</b>											
Aura	ST 400 W	E40	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Aura	SE 400 W	E40	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
BLV	HST-DE	RX7s	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	HZ 600K	NaHj 400	VNaHj 400	–
BLV	HST-SE	E40	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
GE	LU	E40	4.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
GE	LU...PSL	E40	4.30	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
GE	LU...SBY	E40	4.45	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
GE	LU...TD	RX7s	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	HZ 600K	NaHj 400	VNaHj 400	–
GE	LU...XO	E40	4.50	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Iwasaki	NH	E40	4.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Iwasaki	NHT	E40	4.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Narva	NA	E40	4.45	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Narva	NA...D	E40	4.45	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Narva	NA...S	E40	4.45	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Osram	NAVE	E40	4.45	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Osram	NAVE...4Y	E40	4.45	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Osram	NAVE...Super 4Y	E40	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Osram	NAV-T	E40	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Osram	NAV-T...4Y	E40	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Osram	NAV-T...Super 4Y	E40	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Osram	NAV-TS	RX7s	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	HZ 600K	NaHj 400	VNaHj 400	–
Osram	Plantastar	E40	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Philips	SON...Hg free	E40	4.50	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Philips	SON...Plus	E40	4.50	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Philips	SON...Pro	E40	4.45	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Philips	SON...Comfort Pro	E40	4.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Philips	SON-T...Agro	E40	4.13	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Philips	SON-T...Green Power	E40	4.23	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Philips	SON-T...Hg free	E40	4.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Philips	SON-T...Plus	E40	4.50	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Philips	SON-T...Pro	E40	4.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Philips	SON-T...Comfort Pro	E40	4.45	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Radium	RNPE	E40	4.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Radium	RNPT	E40	4.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–



## Lamp Table for Discharge Lamps

### High-pressure sodium lamps (HS lamps)

Manufacturer	Designation	Base	Lamp current	Superimposed ignition system		Pulse ignition system		Instant restrike ignition system		Control gear unit	EB
				Ignitor	Ballast	Ignitor	Ballast	Ignitor	Ballast		
<b>Lamp output 400 W</b>											
Sylvania	SHP	E40	4.60	Z 400..., Z 1000...	NaHJ 400	PZ 1000KD20	NaHJ 400PZT	–	–	VNaHJ 400	–
Sylvania	SHP-S	E40	4.50	Z 400..., Z 1000...	NaHJ 400	PZ 1000KD20	NaHJ 400PZT	–	–	VNaHJ 400	–
Sylvania	SHP-TS	E40	4.50	Z 400..., Z 1000...	NaHJ 400	PZ 1000KD20	NaHJ 400PZT	–	–	VNaHJ 400	–
Sylvania	SHP-TS...Gro-Lux	E40	4.00	Z 400..., Z 1000...	NaHJ 400	PZ 1000KD20	NaHJ 400PZT	–	–	VNaHJ 400	–
<b>Lamp output 600 W</b>											
Aura	ST 600 W	E40	6.20	Z 1000...	NaHJ 600	PZ 1000KD20	NaHJ 600PZT	–	–	VNaHJ 600	–
Aura	SE 600 W	E40	6.20	Z 1000...	NaHJ 600	PZ 1000KD20	NaHJ 600PZT	–	–	VNaHJ 600	–
GE	IU...PSL	E40	6.00	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
GE	IU...XO	E40	6.00	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
GE	IU 400V/600W PSL	E40	3.60	Z 1000/400V	NaH 600/400V	PZ 1000/400V A5	NaH 600PZT/400V	–	–	–	–
Narva	NA	E40	6.20	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
Narva	NA...S	E40	6.20	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
Osram	NAV-T...Super 4Y	E40	6.20	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
Osram	Plantastar 600	E40	6.20	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
Philips	SON-T...Plus	E40	5.80	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
Philips	SON-T... Green Power	E40	6.30	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
Philips	SON-T 600W/400V Green Power	E40	3.62	Z 1000/400V	NaH 600/400V	PZ 1000/400V A5	NaH 600PZT/400V	–	–	–	–
Philips	SON-T 600W EL 400V Green Power*	E40	2.93-2.24	–	–	–	–	–	–	–	–
Radium	RNP-T	E40	6.20	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
Sylvania	SHP-TS	E40	5.90	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
Sylvania	SHP-TS...Gro-Lux	E40	5.50	Z 750...	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
<b>Lamp output 750 W</b>											
GE	IU...PSL	E40	7.00	Z 750...	NaH 750	PZ 1000KD20	NaH 750/600PZT	–	–	–	–
GE	IU 400V/750W PSL	E40	4.40	Z 1000/400V	NaH 750/400V	PZ 1000/400V A5	NaHJ 750PZT	–	–	–	–
<b>Lamp output 1000 W</b>											
Aura	ST 1000 W	E40	10.60	Z 1000...	NaHJ 1000	PZ 1000KD20	–	–	–	–	–
Aura	SE 1000 W	E40	10.30	Z 1000...	NaHJ 1000	PZ 1000KD20	–	–	–	–	–
GE	IU...T	E40	10.60	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
GE	IU...D	E40	10.30	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
GE	IU...TD	RX7s	10.30	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Iwasaki	NH	E40	10.30	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Iwasaki	NHT	E40	10.30	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Narva	NA	E40	10.60	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Narva	NA...D	E40	10.60	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Narva	NAT-VEG 1000/400V	E40	5.70	Z 1000/400V, Z 2000/400V	–	PZ 1000/400V A5	–	–	–	–	–
Osram	NAVE	E40	10.30	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Osram	NAV-T	E40	10.30	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Philips	SON...Pro	E40	10.30	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Philips	SON-T...Pro	E40	10.60	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Philips	SON-T 1000W EL 400V Green Power**	Wire	4-3.17	–	–	–	–	–	–	–	–
Radium	RNP-E	E40	10.30	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Radium	RNP-T	E40	10.30	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Sylvania	SHP-T	E40	10.60	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–
Sylvania	SHP-T...SBY	E40	10.60	Z 1000...	NaH 1000, NaHJD 1000	PZ 1000KD20	–	–	–	–	–

\* Voltage range 210-275 V

\*\* Voltage range 250-315 V

## Lamp Table for Discharge Lamps

### Metal halide lamps (HI lamps)

Manufacturer	Designation	Base	Lamp current	Superimposed ignition system		Pulse ignition system		Instant restrike ignition system		Control gear unit	EB
				Ignitor	Ballast	Ignitor	Ballast	Ignitor	Ballast		
<b>Lamp output 70 W</b>											
BLV	HIE	E27	0.90	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
BLV	HIE-P	E27	0.90	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
BLV	HIT	G12	0.90	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
BLV	HIT-DE	RX7s	0.90	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
GE	ARC	G12	0.95	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
GE	ARC	Rx7s	0.95	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	HZ 600K	NaHj 70	VNaHj 70	EHXc 70
Iwasaki	M	E27	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Iwasaki	MT	E27	1.00	Z 70...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Iwasaki	MT	G8.5	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Iwasaki	MT	G12	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Narva	NC...	E27; G12	0.90	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Narva	NC...	RX7s	0.90	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	HZ 600K	NaHj 70	VNaHj 70	EHXc 70
Osram	HQI-E	E27	0.95 - 1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Osram	HQI-T	G12	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Osram	HQI-TS	RX7s	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	HZ 600K	NaHj 70	VNaHj 70	EHXc 70
Philips	MHN-TD	RX7s	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	HZ 600K	NaHj 70	VNaHj 70	EHXc 70
Philips	MHW-TD	RX7s	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	HZ 600K	NaHj 70	VNaHj 70	EHXc 70
Radium	HRI-E	E27	0.95	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Radium	HRI-T	G12	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Radium	HRI-TS	RX7s	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	HZ 600K	NaHj 70	VNaHj 70	EHXc 70
Sylvania	HSI-MP	E27	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Sylvania	HSI-T	G12	0.95	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Sylvania	HSI-TD	RX7s	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	HZ 600K	NaHj 70	VNaHj 70	EHXc 70
Venture	HIE	E27	0.90	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Venture	HIPE	E27	0.90	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Venture	HIT	E27	0.90	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Venture	HIT	G12	0.90	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Venture	MH-DE	RX7s	1.00	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
<b>Lamp output 100 W</b>											
BLV	HIE	E27	1.20	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
BLV	HIE-P	E27	1.20	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Narva	NC...	E27; E40	1.10	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Osram	HQI-E	E27	1.10	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Radium	HRI-E	E27	1.10	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Sylvania	HSI-MP	E27	1.15	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Venture	HIE	E27	1.10	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Venture	HIPE	E27; E40	1.10	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Venture	HIT	E27; E40	1.10	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
<b>Lamp output 150 W</b>											
BLV	HIE	E27	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
BLV	HIE-P	E27	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
BLV	HIT	G12; E27; E40	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
BLV	HIT-DE	RX7s-24	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
GE	ARC	G12	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
GE	ARC	RX7s-24	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
Iwasaki	M	E27	1.90	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Iwasaki	MT	E27	1.90	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Iwasaki	MT	G12	1.90	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Iwasaki	MTD	RX7s	1.90	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
Narva	NC...	E27; E40; G12	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Narva	NC...	RX7s	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
Osram	HQI-E	E27	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Osram	HQI-R	connector	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	–
Osram	HQI-T	G12	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Osram	HQI-TS	RX7s-24	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
Philips	MHN-TD	RX7s	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
Philips	MHW-TD	RX7s	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
Radium	HRI-E	E27	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Radium	HRI-T	G12	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Radium	HRI-TS	RX7s	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150

## Lamp Table for Discharge Lamps

### Metal halide lamps (HI lamps)

Manufacturer	Designation	Base	Lamp current	Superimposed ignition system		Pulse ignition system		Instant restrike ignition system		Control gear unit	EB
				Ignitor	Ballast	Ignitor	Ballast	Ignitor	Ballast		
<b>Lamp output 150 W</b>											
Sylvania	HSI-MP	E27	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Sylvania	HSI-T	G12	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Sylvania	HSI-TD	RX7s	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
Venture	HIE	E27	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Venture	HIPE	E27; E40	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Venture	HIT	E27; E40	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Venture	HIT	G12	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Venture	MH-DE	RX7s	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
<b>Lamp output 250 W</b>											
BLV	HIE	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
BLV	HIT	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
BLV	HIT-DE	Fc2	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	HZ 1000K	NaHj 250	VNaHj 250	–
GE	ARC250/T	E40	2.75	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
GE	ARC250/TD	Fc2	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	HZ 1000K	NaHj 250	VNaHj 250	–
Narva	NC...	E40	2.15	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Narva	NC...P	E40	2.15	–	–	PZl 1000/1	Q 250	–	–	–	–
Osram	HQI-E	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Osram	HQI-E/P	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Osram	HQI-T	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Osram	HQI-TS	Fc2	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	HZ 1000K	NaHj 250	VNaHj 250	–
Philips	HPI Plus	E40	2.20	–	–	PZl 1000/1	Q 250	–	–	–	–
Philips	HPI-T	E40	2.15	–	–	PZl 1000/1	Q 250	–	–	–	–
Philips	MHN-TD	Fc2	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Radium	HRI-E	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Radium	HRI-T	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Radium	HRI-TS	Fc2	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	HZ 1000K	NaHj 250	VNaHj 250	–
Sylvania	HSI-HX	E40	2.10	–	–	PZl 1000/1	Q 250	–	–	–	–
Sylvania	HSI-T	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Sylvania	HSI-TD	Fc2	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	HZ 1000K	NaHj 250	VNaHj 250	–
Sylvania	HSI-THX	E40	2.10	–	–	PZl 1000/1	Q 250	–	–	–	–
Sylvania	HSI-TSX	E40	2.90	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Sylvania	HSI-SX	E40	2.90	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Venture	HIE	E40	3.10	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Venture	HIPE	E40	3.10	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Venture	HIT	E40	3.10	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Venture	HIT...EURO	E40	2.10	–	–	PZl 1000/1	Q 250	–	–	–	–
Venture	MH-DE	Fc2	3.10	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	HZ 1000K	NaHj 250	VNaHj 250	–
<b>Lamp output 400 W</b>											
BLV	HIE	E40	4.00	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
BLV	HIT	E40	4.00	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
GE	ARC400/T	E40	4.35	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Narva	NC...	E40	3.25	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Narva	NC...P	E40	3.25	–	–	PZl 1000/1	Q 400	–	–	–	–
Osram	HQI-E	E40	3.50	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Osram	HQI-E/P	E40	3.50	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Osram	HQI-T	E40	3.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Osram	HQI-TS	Fc2	3.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	HZ 1000K	NaHj 400	VNaHj 400	–
Philips	HPI-T	E40	3.40	–	–	PZl 1000/1	Q 400	–	–	–	–
Philips	MH-T	E40	3.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Radium	HRI-BT	E40	4.00	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Radium	HRI-E	E40	4.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Radium	HRI-T	E40	4.60	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Radium	HRI-TS	Fc2	4.10	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	HZ 1000K	NaHj 400	VNaHj 400	–
Sylvania	HSI-HX	E40	3.40	–	–	PZl 1000/1	Q 400	–	–	–	–
Sylvania	HSI-T	E40	4.00	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Sylvania	HSI-THX	E40	3.40	–	–	PZl 1000/1	Q 400	–	–	–	–
Sylvania	HSI-TSX	E40	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Sylvania	HSI-SX	E40	4.40	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Venture	HIE	E40	3.20	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–
Venture	HIPE	E40	3.20	Z 400..., Z 1000...	NaHj 400	PZ 1000KD20	NaHj 400PZT	–	–	VNaHj 400	–

## Lamp Table for Discharge Lamps

### Metal halide lamps (HI lamps)

Manufacturer	Designation	Base	Lamp current	Superimposed ignition system		Pulse ignition system		Instant restrike ignition system		Control gear unit	EB
				Ignitor	Ballast	Ignitor	Ballast	Ignitor	Ballast		
<b>Lamp output 400 W</b>											
Venture	HIT	E40	3.20	Z 400..., Z 1000...	NaHJ 400	PZ 1000KD20	NaHJ 400PZT	–	–	VNaHJ 400	–
Venture	HIT...EURO	E40	3.20	–	–	PZI 1000/1	Q 400	–	–	–	–
<b>Lamp output 600 W</b>											
Osram	HQI-TM	G22	6.10	Z1000	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
Radium	HRI-TM	G22	6.10	Z1000	NaH 600	PZ 1000KD20	NaH 600PZT	–	–	VNaH 600	–
<b>Lamp output 1000 W</b>											
BLV	HIT	E40	9.50	Z 1000..., Z 2000	NaHJ 1000	PZ 1000KD20	–	–	–	–	–
GE	SPL 1000	E40	9.50	Z 1000..., Z 2000	NaHJ 1000	PZ 1000KD20	–	–	–	–	–
Narva	NC...	E40	8.25	Z 1000..., Z 2000	NaHJ 1000	PZ 1000KD20	–	–	–	–	–
Narva	NC...P	E40	8.25	–	–	PZI 1000/1	Q 1000	–	–	–	–
Narva	NCT.../400V	E40	4.80	Z 1000/400V; Z 2000/400V	NaHJ 1000	–	–	–	–	–	–
Osram	HQI-TM	G22	9.50	Z 1000	NaHJ 1000	PZ 1000KD20	–	–	–	–	–
Osram	HQI-E	E40	9.50	Z 1000..., Z 2000	NaHJ 1000	PZ 1000KD20	–	–	–	–	–
Osram	HQI-T	E40	9.50	Z 1000..., Z 2000	NaHJ 1000	PZ 1000KD20	–	–	–	–	–
Osram	HQI-TS	cables	9.60	Z 1000..., Z 2000	NaHJ 1000	PZ 1000KD20	–	HZ 1000K	NaHJ 1000	–	–
Philips	HPI-T	E40	8.25	–	–	PZI 1000/1	Q 1000	–	–	–	–
Philips	MHN-LA	cables	9.30	Z 1000..., Z 2000	NaHJ 1000	PZ 1000KD20	–	HZ 1000K	NaHJ 1000	–	–
Radium	HRI-T	E40	9.50	Z 1000..., Z 2000	NaHJ 1000	PZ 1000KD20	–	–	–	–	–
Radium	HRI-TM	G22	9.50	Z 1000	NaHJ 1000	PZ 1000KD20	–	–	–	–	–
Radium	HRI-TS	cables	9.60	Z 1000..., Z 2000	NaHJ 1000	PZ 1000KD20	–	HZ 1000K	NaHJ 1000	–	–
Sylvania	HSI-THX	E40	8.25	–	–	PZI 1000/1	Q 1000	–	–	–	–
Venture	HIT	E40	9.15	Z 1000..., Z 2000	NaHJ1000	PZ 1000KD20	–	–	–	–	–
Venture	MBIL	RX7s	4.40	Z 2000/400V	–	–	–	HZ 2000K/ 400V	–	–	–
<b>Lamp output 2000 W</b>											
GE	SPL 2000/T	E40	10.30	Z 2000/400V	JD 2000	–	–	–	–	–	–
Osram	HQI-T/D	E40	10.30	Z 2000/400V	JD 2000	–	–	–	–	–	–
Osram	HQI-T...SN/380V	E40	8.80	–	–	–	QJ 2000	–	–	–	–
Osram	HQI-TS	cables	11.30	Z 2000/400V	JD 2000	–	–	HZ 2000K/ 400V	JD 2000	–	–
Osram	HQI-TS	cables	12.2	Z 2000/400V	JD 2000II/12.2	–	–	–	–	–	–
Philips	HPI-T 220V	E40	16.50	–	–	PZI 1000/1	JD 2000 I	–	–	–	–
Philips	HPI-T 380V	E40	9.10	–	–	–	QJ 2000	–	–	–	–
Philips	MHN-LA	cables	9.6-10.3	Z 2000/400V	JD 2000	–	–	HZ 2000K/ 400V	JD 2000	–	–
Philips	MHN-SA	X830R	11.30	Z 2000/400V	JD 2000	–	–	HZ 2000K/ 400V	JD 2000	–	–
Philips	MHN-SB 400V	cables	11.30	Z 2000/400V	JD 2000	–	–	HZ 2000K/ 400V	–	–	–
Radium	HRI-T 230V	E40	16.50 (2x8.25)	–	–	PZI 1000/1	JD 2000 I	–	–	–	–
Radium	HRI-T/D	E40	10.30	Z 2000/400V	JD 2000	–	–	–	–	–	–
Radium	HRI-TS	E40	10.30	Z 2000/400V	JD 2000	–	–	–	–	–	–
Radium	HRI-TS	cables	11.30	Z 2000/400V	JD 2000	–	–	HZ 2000K/ 400V*	JD 2000	–	–
Sylvania	HSI-T	E40	9.00	Z 2000/400V	JD 2000	–	–	–	–	–	–
Sylvania	HSI-TD	cables	11.30	Z 2000/400V	JD 2000	–	–	HZ 2000K/ 400V	JD 2000	–	–
Venture	MH	cables	10.30	Z 2000	JD 2000	–	–	–	–	–	–
Venture	MBIL	RX7s	10.30	Z 2000	JD 2000	–	–	–	–	–	–
<b>Lamp output 3500 W</b>											
Radium	HRI-T	E40	18.00	Z 3500/400V	JD 3500	–	–	–	–	–	–
Radium	HRI-TS	cables	18.00	Z 3500/400V	JD 3500	–	–	–	–	–	–

\* Not suitable HRI-TS 2000W/N/L; HQI-TS 2000W/N/L

1

2

3

4

5

6

7

8

9

10

## Lamp Table for Discharge Lamps

### Ceramic discharge tube lamps (C-HI)

Manufacturer	Designation	Base	Lamp current	Superimposed ignition system		Pulse ignition system		Instant restrike ignition system		Control gear unit	EB
				Ignitor*	Ballast	Ignitor	Ballast	Ignitor	Ballast		
<b>Lamp output 20 W</b>											
GE	CMH20MR16	GX10	0.21	–	–	–	–	–	–	–	EHXc 20
GE	CMH20PAR	E27	0.23	–	–	–	–	–	–	–	EHXc 20
GE	CMH20T	G12	0.23	–	–	–	–	–	–	–	EHXc 20
GE	CMH20T	GU6.5	0.21	–	–	–	–	–	–	–	EHXc 20
GE	CMH20TC	G8.5	0.23	–	–	–	–	–	–	–	EHXc 20
GE	CMH20TC	G12	0.23	–	–	–	–	–	–	–	EHXc 20
Osram	HCI-PAR	E27	0.22	–	–	–	–	–	–	–	EHXc 20
Osram	HCI-R111	GX8.5	0.22	–	–	–	–	–	–	–	EHXc 20
Osram	HCI-TF	GU6.5	0.22	–	–	–	–	–	–	–	EHXc 20G.329
Osram	HCI-TC	G8.5	0.22	–	–	–	–	–	–	–	EHXc 20G.329
Philips	CDM-TM	PGJ5	0.22	–	–	–	–	–	–	–	–
Philips	CDM-R	GX10	0.22	–	–	–	–	–	–	–	EHXc 20G.329
Radium	RCC-TC	G8.5	0.22	–	–	–	–	–	–	–	EHXc 20G.329
<b>Lamp output 35 W</b>											
Aura	TT 35 W	E27	0.45	Z250..., Z400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	–
BLV	C-HIT	G12	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
GE	CMH35PAR	E27	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
GE	CMH35T	G12	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
GE	CMH35TC	G8.5	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Osram	HCI-E/P	E27	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Osram	HCI-PAR	E27	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Osram	HCI-R111	GX8.5	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Osram	HCI-T	G12	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Osram	HCI-TC	G8.5	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Osram	HCI-TF	GU6.5	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Panasonic	CPS 35 W	GU8.5	0.44	–	–	–	–	–	–	–	EHXc 35
Philips	CDM-R	E27	0.53	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Philips	CDM-R111	GX8.5	0.53	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Philips	CDM-T	G12	0.53	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Philips	CDM-TC	G8.5	0.53	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Philips	CDM-R	GX10	0.53	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	–	EHXc 35G
Radium	RCC-PAR	E27	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Radium	RCC-T	G12	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Radium	RCC-TC	G8.5	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Sylvania	CMI-T	G12	0.53	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Sylvania	CMI-TC	G8.5	0.53	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Venture	CMH35/T	G12	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
Venture	CMH35/TC	G8.5	0.50	Z 250..., Z 400...	NaHJ 35	PZ 1000KD20	NaHJ 35PZT	–	–	VNaHJ 35	EHXc 35
<b>Lamp output 50 W</b>											
Aura	TT 50 W	E27	0.60	Z250..., Z400...	NaH 50	PZ1000KD20	NAH50PZT	–	–	VNaH 50	EHXd 50
Philips	CDM-TC Elite	G8.5	0.59	Z 70...	NaH 50	–	–	–	–	VNaH 50	EHXc 50
Philips	CDM-T Elite	G12	0.57	Z 70...	NaH 50	–	–	–	–	VNaH 50	EHXc 50
<b>Lamp output 70 W</b>											
Aura	TT 70 W	E27	0.80	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXd 70
BLV	C-HIT	G12	0.98	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
BLV	C-HIT-DE	RX7s	0.90	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
GE	CMH70E	E27	0.98	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
GE	CMH70PAR	E27	0.98	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
GE	CMH70T	G12	0.98	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
GE	CMH70TC	G8.5	0.98	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
GE	CMH70TD	Rx7s	0.98	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
GE	CMH70TT	E27	0.98	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
Osram	HCI-E/P	E27	0.98	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
Osram	HCI-PAR	E27	0.97	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
Osram	HCI-R111	GX8.5	0.98	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
Osram	HCI-T	G12	0.96	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
Osram	HCI-T/P	E27	0.98	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
Osram	HCI-TC	G8.5	0.96	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70
Osram	HCI-TS	RX7s	0.95	Z 250..., Z 400...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	HZ 600K	NaHJ 70	VNaHJ 70	EHXc 70
Osram	HCI-TT	E27	0.92	Z 70...	NaHJ 70	PZ 1000KD20	NaHJ 70PZT	–	–	VNaHJ 70	EHXc 70

# Lamp Table for Discharge Lamps

## Ceramic discharge tube lamps (C-HI)

Manufacturer	Designation	Base	Lamp current	Superimposed ignition system		Pulse ignition system		Instant restrike ignition system		Control gear unit	EB
				Ignitor*	Ballast	Ignitor	Ballast	Ignitor	Ballast		
<b>Lamp output 70 W</b>											
Panasonic	CPS 70 W	GU8.5	0.86	–	–	–	–	–	–	–	EHXc 70
Philips	CDO-ET	E27	0.98	Z 70...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Philips	CDO-TT	E27	1.00	Z 70...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Philips	CDM-R	E27	0.97	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Philips	CDM-R111	GX8.5	0.97	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Philips	CDM-T	G12	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Philips	CDM-TC	G8.5	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Philips	CDM-TD	RX7s	0.97	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	HZ 600K	NaHj 70	VNaHj 70	EHXc 70
Philips	CDM-TP	PG12-2	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Radium	RCC-PAR	E27	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Radium	RCC-T	G12	0.96	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Radium	RCC-TC	G8.5	0.96	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Radium	RCC-TS	RX7s	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	HZ 600K	NaHj 70	VNaHj 70	EHXc 70
Sylvania	CMI-T	G12	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Sylvania	CMI-TC	G8.5	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Sylvania	CMI-TD	RX7s	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Venture	CMH70/T	G12	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Venture	CMH70/TC	G8.5	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Venture	CMH70/TD	RX7s	0.98	Z 250..., Z 400...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
Venture	CMH70/TT	E27	0.98	Z 70...	NaHj 70	PZ 1000KD20	NaHj 70PZT	–	–	VNaHj 70	EHXc 70
<b>Lamp output 100 W</b>											
Aura	TT 100 W	E40	1.30	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	EHXd 100
GE	CMH100PAR	E26	1.10	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
GE	LUCALOX XO	E40	1.11	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	EHXc 100
Osram	HCI-E/P	E27	1.20	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Osram	HCI-T/P	E27	1.20	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Osram	HCI-T	G12	1.10	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	EHXc 100
Philips	CDO-ET	E40	1.20	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Philips	CDO-TT	E40	1.20	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	–
Philips	CDM-T Elite	G12	1.14	Z 250..., Z 400...	NaHj 100	PZ 1000KD20	NaHj 100PZT	–	–	VNaHj 100	EHXc 100
<b>Lamp output 150 W</b>											
Aura	TT 150 W	E40	1.70	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXd 150
BLV	C-HIT	G12	1.85	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
BLV	C-HIT-DE	RX7s-24	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	–
GE	CMH150T	G12	1.85	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
GE	CMH150TD	RX7s	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Osram	HCI-E/P	E27	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Osram	HCI-T	G12	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Osram	HCI-T/P	E27	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Osram	HCI-TS	RX7s-24	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	–
Osram	HCI-TT	E40	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Philips	CDO-ET	E40	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Philips	CDO-TT	E40	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Philips	CDM-T	G12	1.80-1.90	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Philips	CDM-TD	RX7s	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
Philips	CDM-TP	PGX12-2	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Radium	RCC-T	G12	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	HZ 1000K	NaHj 150	VNaHj 150	EHXc 150
Radium	RCC-TS	RX7s	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Sylvania	CMI-T	G12	1.82	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Sylvania	CMI-TD	RX7s-24	1.82	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	–
Venture	CMH150/T	G12	1.85	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
Venture	CMH150/TD	RX7s	1.80	Z 250..., Z 400...	NaHj 150	PZ 1000KD20	NaHj 150PZT	–	–	VNaHj 150	EHXc 150
<b>Lamp output 250 W</b>											
Aura	TT 250 W	E40	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	EHXd 250
GE	CMH250E	E40	2.70	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
GE	CMH250P	E40	2.70	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
GE	CMH-TT	E40	2.90	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Osram	HCI-E	E40	2.90	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Osram	HCI-TC	E40	2.90	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	–	–	VNaHj 250	–
Osram	HCI-TM	G22	2.90	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	HZ 1000K	NaHj 250	VNaHj 250	–
Osram	HCI-TS	E40; Fc2	3.00	Z 250..., Z 400...	NaHj 250	PZ 1000KD20	NaHj 250PZT	HZ 1000K	NaHj 250	VNaHj 250	–

## Lamp Table for Discharge Lamps

### Ceramic discharge tube lamps (C-HI)

Manufacturer	Designation	Base	Lamp current	Superimposed ignition system		Pulse ignition system		Instant restrike ignition system		Control gear unit	EB
				Ignitor*	Ballast	Ignitor	Ballast	Ignitor	Ballast		
<b>Lamp output 250 W</b>											
Philips	CDO-TT	E40	3.00	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	–	–	VNaHJ 250	–
Philips	CDM-T	G12	3.00	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	–	–	VNaHJ 250	–
Radium	RCC-E	E40	2.90	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	–	–	VNaHJ 250	–
Radium	RCC-T	E40	2.80	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	–	–	VNaHJ 250	–
Radium	RCC-TM	G22	2.90	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	HZ 1000K	NaHJ 250	VNaHJ 250	–
Radium	RCC-TS	Fc2	3.00	Z 250..., Z 400...	NaHJ 250	PZ 1000KD20	NaHJ 250PZT	HZ 1000K	NaHJ 250	VNaHJ 250	–
<b>Lamp output 400 W</b>											
Aura	TT 400 W	E40	4.40	Z 400...	NaHJ 400	PZ 1000KD20	NaHJ 400PZT	–	–	VNaHJ 400	–
GE	CMHTT	E40	4.60	Z 400M..., Z 400...	NaHJ 400	PZ 1000KD20	NaHJ 400PZT	–	–	VNaHJ 400	–
Osram	HCI-TM	G22	4.45	Z 400M..., Z 400...	NaHJ 400	PZ 1000KD20	NaHJ 400PZT	–	–	VNaHJ 400	–

\* Z 400 M VS power ignitor is not suitable for C-HI lamps

## Lamp Table for Discharge Lamps

### Mercury vapour lamps (HM lamps)

Manufacturer	Designation	Base	Current	Operating devices Ballasts (ignitor not required)	Capacitor at 50 Hz
<b>Lamp output 50 W</b>					
GE	H 50	E27, B22d	0.62	Q 50, Q 80/50	7 µF
Iwasaki	HF 50 PD	E27	0.62	Q 50, Q 80/50	7 µF
Narva	NF 50	E27	0.62	Q 50, Q 80/50	7 µF
Osram	HQL 50	E27	0.62	Q 50, Q 80/50	7 µF
Philips	HPL 50	E27	0.62	Q 50, Q 80/50	7 µF
Radium	HRL 50	E27	0.62	Q 50, Q 80/50	7 µF
Sylvania	HSL 50	E27	0.62	Q 50, Q 80/50	7 µF
<b>Lamp output 80 W</b>					
GE	H 80	E27, B22d-3*	0.80	Q 80, Q 80/50, Q 125/80	8 µF
Iwasaki	HF 80 PD	E27	0.80	Q 80, Q 80/50, Q 125/80	8 µF
Narva	NF 80	E27	0.80	Q 80, Q 80/50, Q 125/80	8 µF
Osram	HQL 80	E27	0.80	Q 80, Q 80/50, Q 125/80	8 µF
Philips	HPL 80	E27	0.80	Q 80, Q 80/50, Q 125/80	8 µF
Radium	HRL 80	E27	0.80	Q 80, Q 80/50, Q 125/80	8 µF
Sylvania	HSL 80	E27	0.80	Q 80, Q 80/50, Q 125/80	8 µF
<b>Lamp output 125 W</b>					
GE	H 125	E27, B22d-3*	1.15	Q 125, Q 125/80	10 µF
Iwasaki	HF 125 PD	E27	1.15	Q 125, Q 125/80	10 µF
Narva	NF 125	E27	1.15	Q 125, Q 125/80	10 µF
Osram	HQL 125	E27, E40	1.15	Q 125, Q 125/80	10 µF
Philips	HPL 125	E27	1.15	Q 125, Q 125/80	10 µF
Radium	HRL 125	E27	1.15	Q 125, Q 125/80	10 µF
Sylvania	HSL 125	E27, B22d-3*	1.15	Q 125, Q 125/80	10 µF
<b>Lamp output 250 W</b>					
GE	H 250	E40	2.15	Q 250, U-Q 250/150	18 µF
Iwasaki	HF 250 PD	E40	2.15	Q 250, U-Q 250/150	18 µF
Narva	NF 250	E40	2.15	Q 250, U-Q 250/150	18 µF
Osram	HQL 250	E40	2.15	Q 250, U-Q 250/150	18 µF
Philips	HPL 250	E40	2.15	Q 250, U-Q 250/150	18 µF
Radium	HRL 250	E40	2.15	Q 250, U-Q 250/150	18 µF
Sylvania	HSL 250	E40	2.15	Q 250, U-Q 250/150	18 µF
<b>Lamp output 400 W</b>					
GE	H 400	E40	3.25	Q 400, U-Q 400/250	25 µF
Iwasaki	HF 400 PD	E40	3.25	Q 400, U-Q 400/250	25 µF
Narva	NF 400	E40	3.25	Q 400, U-Q 400/250	25 µF
Osram	HQL 400	E40	3.25	Q 400, U-Q 400/250	25 µF
Philips	HPL 400	E40	3.25	Q 400, U-Q 400/250	25 µF
Radium	HRL 400	E40	3.25	Q 400, U-Q 400/250	25 µF
Sylvania	HSL 400	E40	3.25	Q 400, U-Q 400/250	25 µF
<b>Lamp output 700 W</b>					
GE	H 700	E40	5.45	Q 700	40 µF
Iwasaki	HF 700 PD	E40	5.40	Q 700	40 µF
Narva	NF 700	E40	5.40	Q 700	40 µF
Osram	HQL 700	E40	5.40	Q 700	40 µF
Philips	HPL 700	E40	5.40	Q 700	40 µF
Radium	HRL 700	E40	5.40	Q 700	40 µF
Sylvania	HSL 700	E40	5.40	Q 700	40 µF
<b>Lamp output 1000 W</b>					
GE	H 1000	E40	7.50	Q 1000	60 µF
Iwasaki	HF 1000 PD	E40	7.50	Q 1000	60 µF
Narva	NF 1000	E40	7.50	Q 1000	60 µF
Osram	HQL 1000	E40	7.50	Q 1000	60 µF
Philips	HPL 1000	E40	7.50	Q 1000	60 µF
Radium	HRL 1000	E40	7.50	Q 1000	60 µF
Sylvania	HSL 1000	E40	7.50	Q 1000	60 µF

\* The VS range does not include a lampholder for base B22d-3



## Energy efficiency classification

The commission's regulation (EC) No. 245/2009 dated 18 March 2009 implementing Directive 2005/32/EC of the European Parliament and of the Council with regard to defining ecodesign requirements for fluorescent lamps without integrated ballast, high-pressure discharge lamps and for ballasts and luminaires needed for their operation, and repealing Directive 2000/55/EC of the European Parliament and of the Council (official title), has created a legal framework in the EU that defines fundamental requirements for operating efficient lighting technology products.

Although the Regulation predominantly applies to general lighting, it is also product-orientated and thus independent of any specific application. The efficiency and performance requirements (specifications governing performance features) apply to fluorescent lamps without integrated ballast, high-pressure discharge lamps as well as ballasts and luminaires needed to operate these lamps. A brief overview of the requirements governing high-pressure discharge lamps is provided in the following table (excerpt from the CELMA guide).

Stage	Requirements governing	
<b>1</b> 13.04.2010	Ballasts	<ul style="list-style-type: none"> <li>No special requirements</li> </ul>
<b>Interim Stage</b> 13.09.2010	Luminaires	<ul style="list-style-type: none"> <li>After 18 months: technical information must be made available, both online and in luminaire documentation (for luminaires &gt; 2,000 Lumens)</li> </ul>
<b>2</b> 13.04.2012	Ballasts	<ul style="list-style-type: none"> <li>Introduction of minimum energy-efficiency index values for HID ballasts and their labelling:                             <ul style="list-style-type: none"> <li><math>P &lt; 30 \text{ W} - \eta \geq 65\%</math></li> <li><math>30 &lt; P &lt; 75 \text{ W} - \eta \geq 75\%</math></li> <li><math>75 &lt; P &lt; 105 \text{ W} - \eta \geq 80\%</math></li> <li><math>105 &lt; P &lt; 405 \text{ W} - \eta \geq 85\%</math></li> <li><math>P &gt; 405 \text{ W} - \eta \geq 90\%</math></li> </ul> </li> <li>HID ballasts to be labelled: EEL=A3</li> </ul>
	Luminaires	<ul style="list-style-type: none"> <li>Luminaire designs must permit the integration of 3rd-stage ballasts. Exception: luminaires &gt; IP4X</li> </ul>
at the latest by <b>13.04.2014</b>	<b>Revision of the regulation</b>	
	Technological progress as well as the sum of the experience gained during the implementation of the Regulation be taken into consideration during the revision process.	
<b>3</b> 13.04.2017	Ballasts	<ul style="list-style-type: none"> <li>Minimum energy-efficiency index values will be raised:                             <ul style="list-style-type: none"> <li><math>P &lt; 30 \text{ W} - \eta \geq 78\%</math></li> <li><math>30 &lt; P &lt; 75 \text{ W} - \eta \geq 85\%</math></li> <li><math>75 &lt; P &lt; 105 \text{ W} - \eta \geq 87\%</math></li> <li><math>105 &lt; P &lt; 405 \text{ W} - \eta \geq 90\%</math></li> <li><math>P &gt; 405 \text{ W} - \eta \geq 92\%</math></li> </ul> </li> <li>HID ballasts to be labelled: A2</li> </ul>
	Luminaires	<ul style="list-style-type: none"> <li>All luminaire designs must permit the integration of 3rd-stage ballasts.</li> </ul>

1

**2**

3

4

5

6

7

8

9

10

WARM START,  
DIMMABLE AND  
INSTANT START



## ELECTRONIC BALLASTS

Operating fluorescent lamps with electronic ballasts yields numerous advantages with regard to efficiency and convenience. Further details are provided on the respective product pages and the technical appendix.

The brightness of fluorescent lamps can also be regulated with the help of dimmable electronic ballasts. Adjusting lamp wattage leads to a further reduction of energy consumption and of the associated costs. The corresponding ELXd units from Vossloh-Schwabe enable conventional 1-10 V control units to be connected via a bipolar 1-10 V dimmer interface.

Moreover, Vossloh-Schwabe's product range also contains electronic ballasts that can be dimmed using conventional light sensors or polarity-independent dimmer interfaces via DALI-compatible control units. Both interfaces (1-10 V and DALI) were developed in accordance with EN 60929. Under consideration of the maximum current of the respective control unit, it is also possible to operate several electronic ballasts in parallel.

# 3

## Electronic Ballasts for TC and T Lamps

### Electronic ballasts for compact fluorescent lamps

ELXs - Warm start	134
ELXc - Warm start - Linear casing shape	135
ELXd - Dimmable - Linear casing shape	136-137
ELXc - Warm start - Compact casing shape	138-146
ECO EffectLine	144
ELXd - Dimmable - Compact casing shape	147-150

### Electronic ballasts for tubular fluorescent lamps

ELXs - Warm start	151
ELXc - Warm start - Linear casing shape	152-159
EffectLine and EffectLine II	156-157
New T5 EffectLine	158
ECO EffectLine	159
ELXd - Dimmable - Linear casing shape	160-163

### Accessories for dimmable electronic built-in ballasts

164

### Technical details for fluorescent lamps

243-271

General technical details	394-401
Glossary	402-404

1

2

3

4

5

6

7

8

9

10

## ELXs – Warm Start for Compact Fluorescent Lamps

Electronic built-in ballasts

Casing: heat-resistant polyamide

Power factor: approx. 0.6

(depending on the lamp output)

DC voltage operation: 198 - 264 V

Push-in terminals with lever opener: 0.5-1.5 mm<sup>2</sup>

RFI-suppressed

For luminaires of protection class I and II

Degree of protection: IP20

Fixing slots for screws M4


For lighting systems with high switching frequency (> 5/day)

EOL shut down approved


acc. to EN 61347 Test 2



**K20**



**K21**

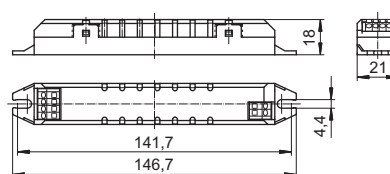

- T5     TC     BUILT-IN     1-10 V  
 T8     INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	
5	TC-SEL	2G7	1 x 5.0	ELXs 116.900	<b>188661</b>	220-240	A3	-15 to 55	max. 75	K20	6.1	
				ELXs 116.903	<b>188662</b>	220-240	A3	-15 to 55	max. 75	K21	6.1	
7	TC-SEL	2G7	1 x 6.4	ELXs 116.900	<b>188661</b>	220-240	A2	-15 to 55	max. 75	K20	7.5	
				ELXs 116.903	<b>188662</b>	220-240	A2	-15 to 55	max. 75	K21	7.5	
9	TC-SEL	2G7	1 x 8.0	ELXs 116.900	<b>188661</b>	220-240	A2	-15 to 55	max. 75	K20	8.8	
				ELXs 116.903	<b>188662</b>	220-240	A2	-15 to 55	max. 75	K21	8.8	
10	TC-DEL	G24q-1	1 x 9.3	ELXs 116.900	<b>188661</b>	220-240	A2	-15 to 55	max. 75	K20	10.2	
				ELXs 116.900	<b>188661</b>	220-240	A2	-15 to 55	max. 75	K20	10.3	
	TC-DD	GR10q	1 x 9.3	ELXs 116.903	<b>188662</b>	220-240	A2	-15 to 55	max. 75	K21	10.2	
				ELXs 116.903	<b>188662</b>	220-240	A2	-15 to 55	max. 75	K21	10.3	
11	TC-SEL	2G7	1 x 10.8	ELXs 116.900	<b>188661</b>	220-240	A2	-15 to 55	max. 75	K20	11.8	
				ELXs 116.903	<b>188662</b>	220-240	A2	-15 to 55	max. 75	K21	11.8	
13	TC-DEL/-TEL	G24q-1/GX24q-1	1 x 12.5	ELXs 121.901	<b>188663</b>	220-240	A2	-15 to 55	max. 80	K20	15.5	
				ELXs 121.904	<b>188664</b>	220-240	A2	-15 to 55	max. 80	K21	15.5	
16	TC-DD	GR10q	1 x 13.2	ELXs 116.900	<b>188661</b>	220-240	A3	-15 to 55	max. 75	K20	15.1	
				ELXs 116.903	<b>188662</b>	220-240	A3	-15 to 55	max. 75	K21	15.1	
18	TC-DEL/-TEL	G24q-2/GX24q-2	1 x 15.3	ELXs 121.901	<b>188663</b>	220-240	A2	-15 to 55	max. 80	K20	16.9	
				ELXs 121.904	<b>188664</b>	220-240	A2	-15 to 55	max. 80	K21	16.9	
	TC-F/-L	2G10/2G11	1 x 16.0	ELXs 124.902	<b>188665</b>	220-240	A2	-15 to 55	max. 85	K20	17.9	
				ELXs 124.905	<b>188666</b>	220-240	A2	-15 to 55	max. 85	K21	17.9	
22	T-R5	2GX13	1 x 19.1	ELXs 124.902	<b>188665</b>	220-240	A2	-15 to 55	max. 85	K20	21.2	
				ELXs 124.905	<b>188666</b>	220-240	A2	-15 to 55	max. 85	K21	21.2	
24	TC-F/-L	2G10/2G11	1 x 20.0	ELXs 124.902	<b>188665</b>	220-240	A2	-15 to 55	max. 85	K20	21.4	
				ELXs 124.905	<b>188666</b>	220-240	A2	-15 to 55	max. 85	K21	21.4	
				1 x 20.8	ELXs 126.906	<b>188667</b>	220-240	A2	-15 to 55	max. 85	K20	22.9
					ELXs 126.907	<b>188668</b>	220-240	A2	-15 to 55	max. 85	K21	22.9
26	TC-DEL/-TEL	G24q-3/GX24q-3	1 x 21.5	ELXs 126.906	<b>188667</b>	220-240	A2	-15 to 55	max. 85	K20	23.4	
				ELXs 126.907	<b>188668</b>	220-240	A2	-15 to 55	max. 85	K21	23.4	

Circuit diagrams see pages 255-259

## ELXc – Warm Start for TC-F, TC-L Lamps

Electronic built-in ballasts

Casing: metal

Power factor: > 0.96

DC voltage

for operation: 176–264 V

for ignition: 198–264 V

(ELXc 180.866, 280.538: DC voltage cannot be reduced to 176 V)

Push-in terminals: 0.5–1 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads HO5V-U 0.5

RFI-suppressed

For luminaires of protection class I



Degree of protection: IP20

For lighting systems with

high switching frequency (> 5/day)

EOL shut down approved acc. to EN 61347 Test 2

M10/M11

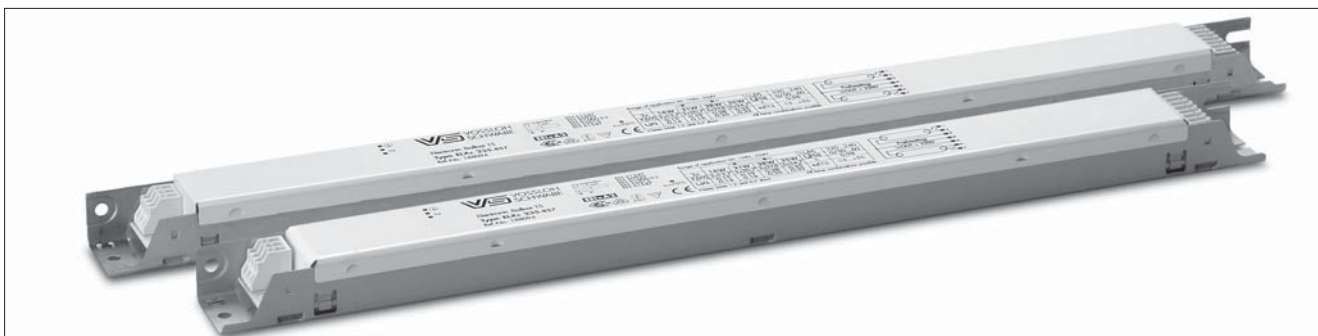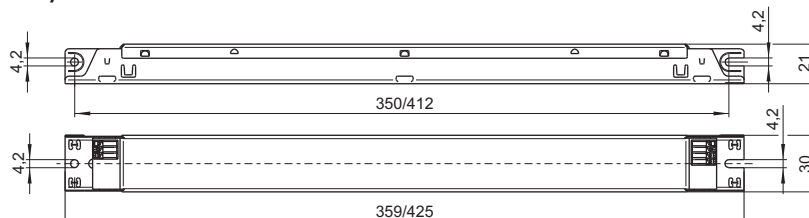

- T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
18	TC-F/L	2G10/2G11	1 x 16.0	ELXc 140.862	<b>188140</b>	220–240	A2	-15 to 55	max. 70	M10	19.0	109.0
2x18	TC-F/L	2G10/2G11	2 x 16.0	ELXc 240.863	<b>188616</b>	220–240	A2 BAT	-15 to 55	max. 70	M10	35.0	105.3
24	TC-F/L	2G10/2G11	1 x 22.0	ELXc 140.862	<b>188140</b>	220–240	A2	-15 to 55	max. 70	M10	27.0	109.0
2x24	TC-F/L	2G10/2G11	2 x 22.0	ELXc 240.863	<b>188616</b>	220–240	A2 BAT	-15 to 55	max. 70	M10	51.0	106.8
36	TC-F/L	2G10/2G11	1 x 32.0	ELXc 140.862	<b>188140</b>	220–240	A2	-15 to 55	max. 70	M10	35.0	101.0
2x36	TC-F/L	2G10/2G11	2 x 32.0	ELXc 240.863	<b>188616</b>	220–240	A2 BAT	-15 to 55	max. 70	M10	71.0	98.7
40	TC-L	2G11	1 x 40.0	ELXc 140.862	<b>188140</b>	220–240	A2	-15 to 55	max. 70	M10	46.0	104.0
2x40	TC-L	2G11	2 x 40.0	ELXc 240.863	<b>188616</b>	220–240	A2 BAT	-15 to 55	max. 70	M10	89.0	103.6
55	TC-L	2G11	1 x 55.0	ELXc 180.866	<b>188144</b>	220–240	A2 BAT	-15 to 55	max. 70	M10	62.0	107.3
2x55	TC-L	2G11	2 x 50.0	ELXc 254.865	<b>188618</b>	220–240	A2 BAT	-15 to 50	max. 70	M10	112.0	92.9
			2 x 55.0	ELXc 280.538	<b>188619</b>	220–240	A2 BAT	-15 to 50	max. 70	M11	120.0	100.0
80	TC-L	2G11	1 x 80.0	ELXc 180.866	<b>188144</b>	220–240	A2 BAT	-15 to 55	max. 70	M10	87.0	97.6
2x80	TC-L	2G11	2 x 80.0	ELXc 280.538	<b>188619</b>	220–240	A2 BAT	-15 to 50	max. 70	M11	175.0	100.0

Circuit diagrams see pages 255–259

## ELXd – Dimmable for TC-F, TC-L Lamps

Electronic built-in ballasts

Casing: metal

**Dimming range:**

**approx. 1–100% of lamp power**

Power factor:  $\geq 0.95$  at 100% operation

DC voltage

for operation: 154–276 V (M22, M23, M24)

for operation: 176–264 V (M9)

for ignition: 198–264 V

Push-in terminals: 0,5–1 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

RFI-suppressed

For luminaires of protection class I

Degree of protection: IP20

Fixing holes for screws M4


for lateral or base mounting

For lighting systems with


high switching frequency ( $> 5$ /day)

EOL shut down approved acc. to EN 61347 Test 2


**M9**

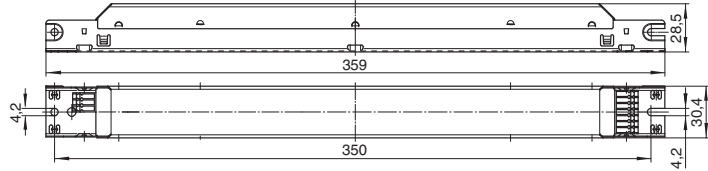

**M23**

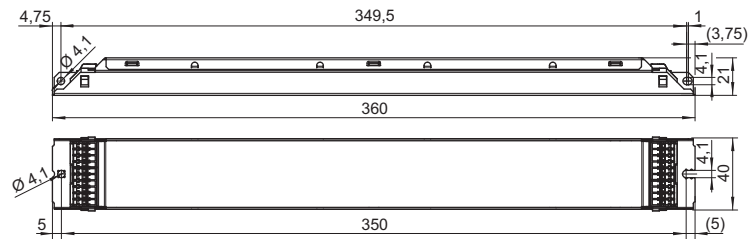

**M22/M24**

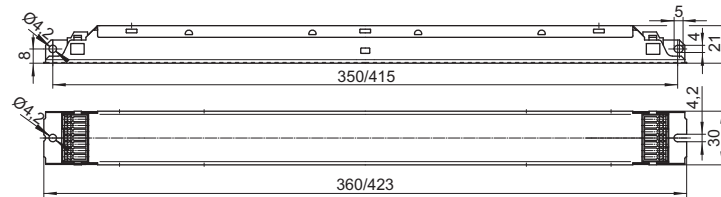

# Electronic Ballasts for TC and T Lamps

## ELXd – Dimmable 1–10 V for TC-F, TC-L lamps

Control voltage: DC 1–10 V

acc. to EN 60929 with earth leakage current 0.5 mA

(protected if connected to mains voltage)

For use with open- or closed-loop control units

T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energie efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
18	TC-F/L	2G10/2G11	1 x 16.0	ELXd 118.718	<b>188873</b>	220–240	EEL=A1	10 to 50	max. 70	M9	18.0	94.0
2x18	TC-F/L	2G10/2G11	2 x 16.0	ELXd 218.719	<b>188874</b>	220–240	EEL=A1	10 to 50	max. 70	M9	36.0	90.6
24	TC-F/L	2G10/2G11	1 x 22.0	ELXd 118.718	<b>188873</b>	220–240	EEL=A1	10 to 50	max. 70	M9	27.0	96.6
			1 x 23.0	ELXd 124.607	<b>188336</b>	220–240	A1 BAT	10 to 50	max. 75	M22	26.0	100.0
2x24	TC-F/L	2G10/2G11	2 x 22.0	ELXd 218.719	<b>188874</b>	220–240	EEL=A1	10 to 50	max. 70	M9	52.0	100.8
			2 x 23.0	ELXd 224.608	<b>188337</b>	220–240	A1 BAT	10 to 50	max. 75	M24	49.0	100.0
3x24	TC-F/L	2G10/2G11	3 x 24.0	ELXd 324.623	<b>188597</b>	220–240	A1 BAT	10 to 50	max. 75	M23	73.4	100.0
4x24	TC-F/L	2G10/2G11	4 x 24.0	ELXd 424.624	<b>188598</b>	220–240	A1 BAT	10 to 50	max. 75	M23	97.6	100.0
36	TC-F/L	2G10/2G11	1 x 32.0	ELXd 136.720	<b>188875</b>	220–240	A1 BAT	10 to 50	max. 70	M9	37.3	93.5
2x36	TC-F/L	2G10/2G11	2 x 32.0	ELXd 236.721	<b>188876</b>	220–240	EEL=A1	10 to 50	max. 70	M9	72.0	92.6
40	TC-L	2G11	1 x 38.0	ELXd 139.609	<b>188338</b>	220–240	A1 BAT	10 to 50	max. 75	M22	42.0	100.0
2x40	TC-L	2G11	2 x 38.0	ELXd 239.610	<b>188339</b>	220–240	A1 BAT	10 to 50	max. 75	M24	82.0	100.0
55	TC-L	2G11	1 x 51.0	ELXd 158.722	<b>188877</b>	220–240	EEL=A1	10 to 50	max. 70	M9	56.0	92.5
			1 x 54.0	ELXd 154.611	<b>188340</b>	220–240	A1 BAT	10 to 50	max. 75	M22	59.0	100.0
2x55	TC-L	2G11	2 x 54.0	ELXd 254.612	<b>188341</b>	220–240	A1 BAT	10 to 50	max. 75	M24	115.0	100.0
80	TC-L	2G11	1 x 80.0	ELXd 180.613	<b>188342</b>	220–240	A1 BAT	10 to 50	max. 75	M22	88.0	100.0

Circuit diagrams see pages 255–259

## ELXd – Dimmable with push key or DALI for TC-F, TC-L lamps

Complete implementation of the DALI-standard:  
 addressable, memory store for scenes and groups,  
 revertive information communication, physical and  
 RND-selection, standardized lamp characteristic  
 Low-power design ensures very low standby  
 power consumption  
 standby power consumption: ≤ 0.2 W

T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energie efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
18	TC-F/L	2G10/2G11	1 x 16.0	ELXd 118.615	<b>188344</b>	220–240	A1 BAT	10 to 50	max. 75	M22	19.0	100.0
2x18	TC-F/L	2G10/2G11	2 x 16.0	ELXd 218.616	<b>188345</b>	220–240	A1 BAT	10 to 50	max. 75	M24	37.0	100.0
24	TC-F/L	2G10/2G11	1 x 23.0	ELXd 124.600	<b>188329</b>	220–240	A1 BAT	10 to 50	max. 75	M22	26.0	100.0
2x24	TC-F/L	2G10/2G11	2 x 23.0	ELXd 224.601	<b>188330</b>	220–240	A1 BAT	10 to 50	max. 75	M24	49.0	100.0
3x24	TC-F/L	2G10/2G11	3 x 23.0	ELXd 324.626	<b>188600</b>	220–240	A1 BAT	10 to 50	max. 75	M23	73.4	100.0
4x24	TC-F/L	2G10/2G11	4 x 23.0	ELXd 424.628	<b>188602</b>	220–240	A1 BAT	10 to 50	max. 75	M23	97.6	100.0
36	TC-F/L	2G10/2G11	1 x 32.0	ELXd 136.617	<b>188346</b>	220–240	A1 BAT	10 to 50	max. 75	M22	36.0	100.0
2x36	TC-F/L	2G10/2G11	2 x 32.0	ELXd 236.618	<b>188347</b>	220–240	A1 BAT	10 to 50	max. 75	M24	69.0	100.0
40	TC-L	2G11	1 x 38.0	ELXd 139.602	<b>188331</b>	220–240	A1 BAT	10 to 50	max. 75	M22	42.0	100.0
2x40	TC-L	2G11	2 x 38.0	ELXd 239.621	<b>188350</b>	220–240	A1 BAT	10 to 50	max. 75	M24	82.0	100.0
55	TC-L	2G11	1 x 54.0	ELXd 154.603	<b>188332</b>	220–240	A1 BAT	10 to 50	max. 75	M22	59.0	100.0
2x55	TC-L	2G11	2 x 54.0	ELXd 254.604	<b>188333</b>	220–240	A1 BAT	10 to 50	max. 75	M24	115.0	100.0
80	TC-L	2G11	1 x 80.0	ELXd 180.605	<b>188334</b>	220–240	A1 BAT	10 to 50	max. 75	M22	88.0	100.0

Circuit diagrams see pages 255–259



## ELXc – Warm Start for Compact Fluorescent Lamps

Electronic ballasts

Casing: heat-resistant polyamide (K2, K3)  
or heat-resistant polycarbonate (K2.1, K4)

DC voltage

for operation: 176–264 V

for ignition: 198–264 V

(ELXc 242.837: DC voltage cannot  
be reduced to 176 V)

Power factor: > 0.96 (K2.1: 0.98)

Push-in terminals with lever opener: 0.5–1.5 mm<sup>2</sup>

RFI-suppressed

Constant power consumption

For luminaires of protection class I

Degree of protection: IP20


Fixing brackets for screws M4  
for lateral or base mounting

For lighting systems with

high switching frequency (> 5/day)


EOL shut down approved acc. to

EN 61347 Test 2

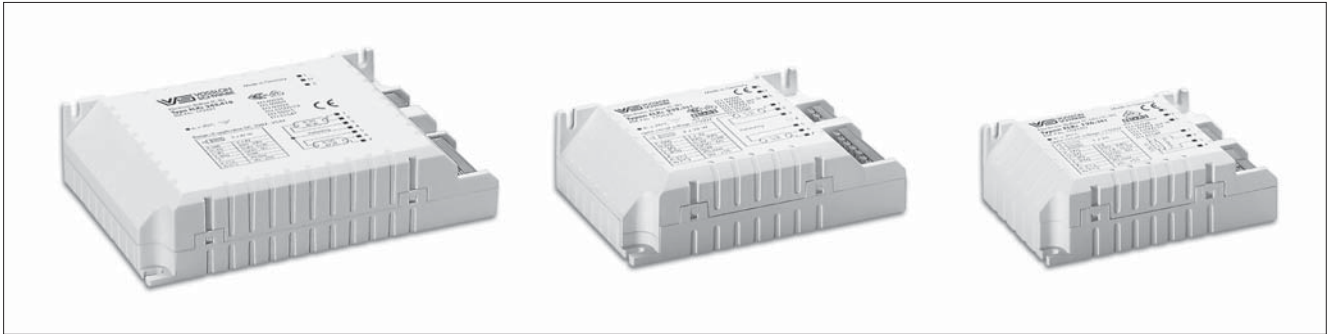


### Electronic built-in ballasts


**K2**

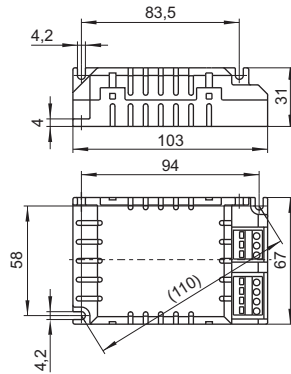


**K3**

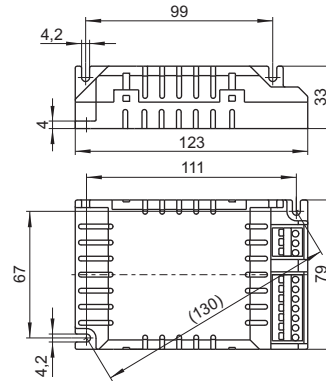

**K4**

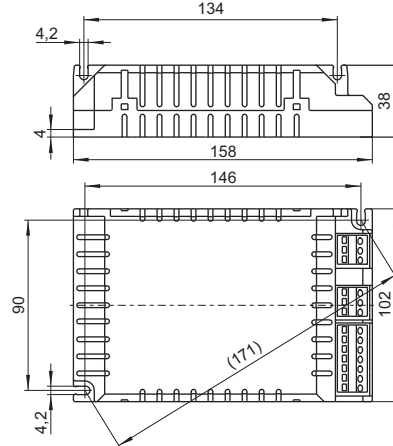


## ELXc – Warm Start for Compact Fluorescent Lamps

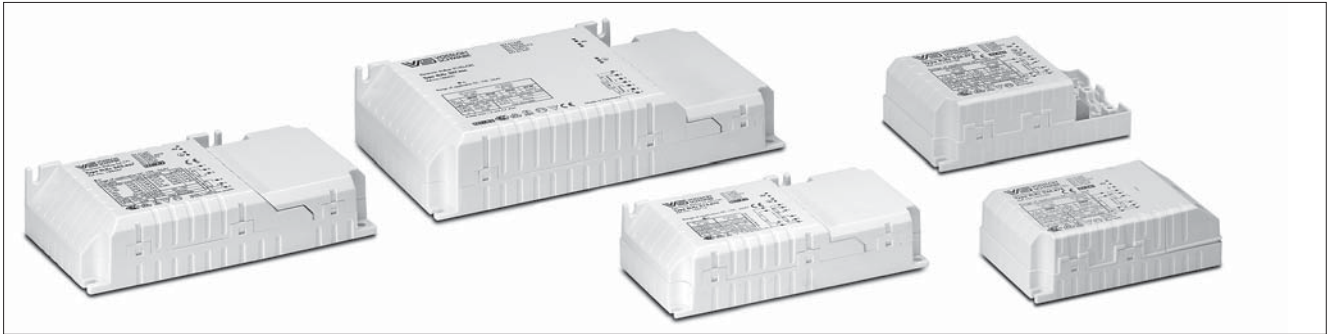


### Independent electronic ballasts


#### K2 with cord grip

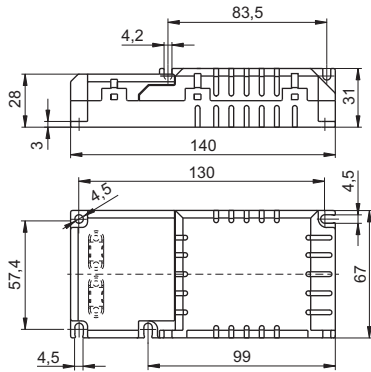


#### K2.1 with cord grip



#### K3 with cord grip

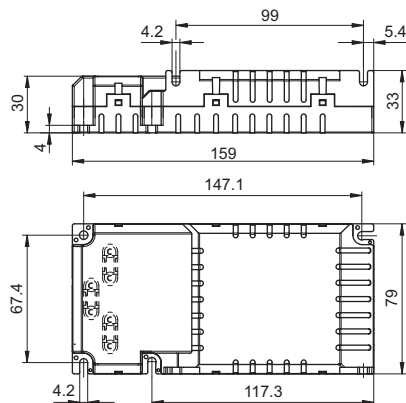

#### K4 with cord grip

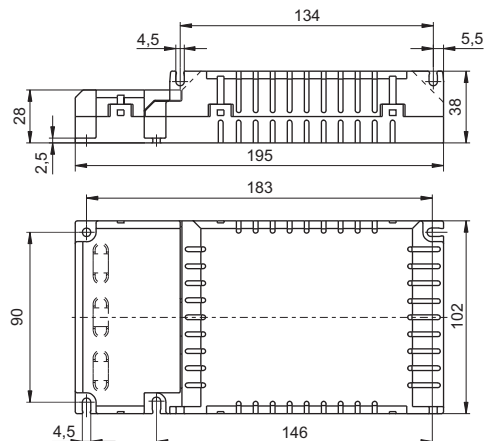

1

2

3

4

5

6


7

8

9

10

# Electronic Ballasts for TC and T Lamps

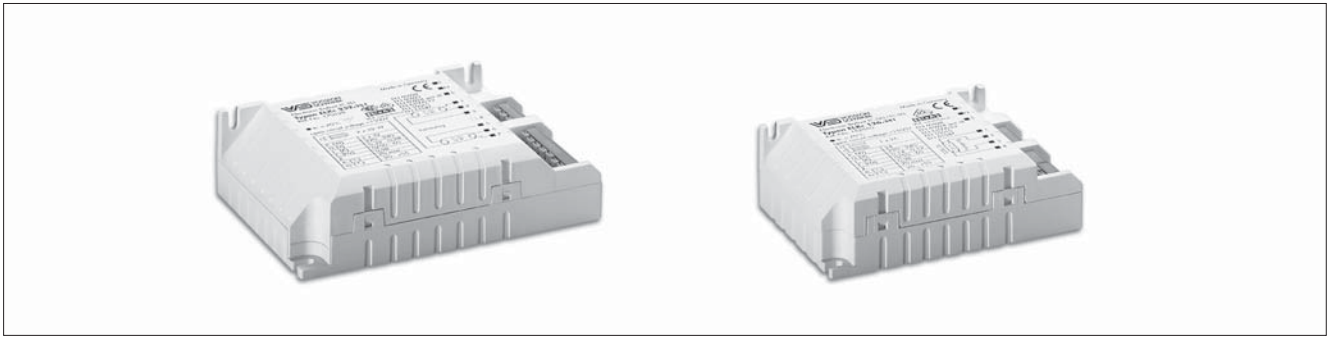

## ELXc – Warm start for compact fluorescent lamps

### Built-in ballasts


ELXc 213.870, 218.871, 142.872,  
242.837, 155.378 have a second earth terminal  
to ground the luminaires for example



Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energie efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
9	TC-SEL	2G7	1 x 8.0	ELXc 213.870	<b>188698</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	10.7	102.9
2x9	TC-SEL	2G7	2 x 8.0	ELXc 213.870	<b>188698</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	19.4	102.9
10	TC-DEL	G24q-1	1 x 9.5	ELXc 213.870	<b>188698</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	10.9	99.2
2x10	TC-DEL	G24q-1	2 x 9.5	ELXc 213.870	<b>188698</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	20.5	98.8
11	TC-SEL	2G7	1 x 11.0	ELXc 213.870	<b>188698</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	14.7	110.1
2x11	TC-SEL	2G7	2 x 11.0	ELXc 213.870	<b>188698</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	27.9	116.1
13	TC-DEL/-TEL	G24q-1/GX24q-1	1 x 12.5	ELXc 213.870	<b>188698</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	15.0	102.9
2x13	TC-DEL/-TEL	G24q-1/GX24q-1	2 x 12.5	ELXc 213.870	<b>188698</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	28.1	110.9
18	TC-DEL/-TEL	G24q-2/GX24q-2	1 x 16.5	ELXc 218.871	<b>188699</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	21.0	104.8
	TC-F/-L	2G10/2G11	1 x 16.0	ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	18.0	102.0
2x18	TC-DEL/-TEL	G24q-2/GX24q-2	2 x 16.5	ELXc 218.871	<b>188699</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	38.0	100.7
	TC-F/-L	2G10/2G11	2 x 16.0	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	35.0	104.3
				ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	34.0	98.0
22	T-R5	2GX13	1 x 22.0	ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	26.0	103.0
				ELXc 128.869	<b>188589</b>	220-240	A2 BAT	-20 to 50	max. 70	K2	25.0	96.7
22+40	T-R5	2GX13	1 x 22+40	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	68.0	100.0
2x22	T-R5	2GX13	2 x 22.0	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	48.5	105.8
24	TC-F/-L	2G10/2G11	1 x 22.0	ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	27.0	105.0
			1 x 22.5	ELXc 128.869	<b>188589</b>	220-240	A2	-20 to 50	max. 70	K2	25.0	95.8
2x24	TC-F/-L	2G10/2G11	2 x 22.0	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	48.5	106.2
				ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	47.0	102.0
26	TC-DEL/-TEL	G24q-3/GX24q-3	1 x 24.0	ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	26.0	104.0
2x26	TC-DEL/-TEL	G24q-3/GX24q-3	2 x 24.0	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	53.0	106.1
				ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	53.0	105.0

Circuit diagrams see pages 255-259

# Electronic Ballasts for TC and T Lamps

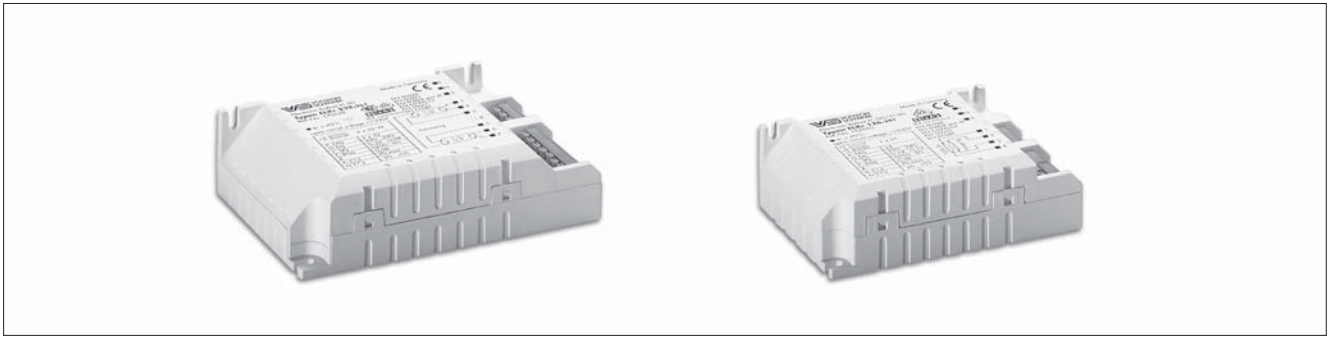

## ELXc – Warm start for compact fluorescent lamps

### Built-in ballasts

ELXc 213.870, 218.871, 142.872,  
242.837, 155.378 have a second earth terminal  
to ground the luminaires for example

- T5     TC     BUILT-IN     1-10 V  
 T8     INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energie efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
28	TC-DD	GR10q	1 x 26.0	ELXc 128.869	<b>188589</b>	220-240	A2 BAT	-20 to 50	max. 70	K2	32.0	98.1
32	TC-TEL	GX24q-3	1 x 32.0	ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	33.0	102.0
2x32	TC-TEL	GX24q-3	2 x 32.0	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	70.5	104.8
36	TC-F/L	2G10/2G11	1 x 32.0	ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	34.0	105.0
2x36	TC-F/L	2G10/2G11	2 x 32.0	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	70.5	101.8
38	TC-DD	GR10q	1 x 36.0	ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	38.0	95.0
2x38	TC-DD	GR10q	2 x 36.0	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	79.2	101.3
40	TC-L	2G11	1 x 40.0	ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	43.0	99.0
	T-R5	2GX13	1 x 40.0	ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	41.0	96.0
2x40	TC-L	2G11	2 x 40.0	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	88.0	101.3
	T-R5	2GX13	2 x 40.0	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	88.0	101.1
42	TC-TEL	GX24q-4	1 x 42.0	ELXc 142.872	<b>188700</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	45.0	99.0
2x42	TC-TEL	GX24q-4	2 x 43.0	ELXc 242.837	<b>188643</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	94.5	100.6
55	TC-L	2G11	1 x 55.6	ELXc 155.378	<b>188680</b>	220-240	A2 BAT	-20 to 50	max. 70	K3	60.0	102.4
	T-R5	2GX13	1 x 55.6	ELXc 155.378	<b>188680</b>	220-240	A2 BAT	-20 to 50	max. 70	K3	60.0	101.2
60	T-R5	2GX13	1 x 60.6	ELXc 155.378	<b>188680</b>	220-240	A2	-20 to 50	max. 70	K3	66.0	109.5
80	TC-L	2G11	1 x 80.5	ELXc 155.378	<b>188680</b>	220-240	A2 BAT	-20 to 50	max. 70	K3	88.0	101.3

Circuit diagrams see pages 255 - 259



## ELXc – Warm start for compact fluorescent lamps – Independent ballasts

For ELXc 257.836 a

loop-through of the mains supply is possible

ELXc 213.870, 218.871, 142.872,

242.837, 155.378 have a second earth terminal

to ground the luminaires

T5     TC     BUILT-IN     1-10 V  
 T8     INDEPENDENT     DALI/PUSH


Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> [°C]	Casing temperature t <sub>c</sub> [°C]	Casing	Output W	Luminous factor %
9	TC-SEL	2G7	1 x 8.0	ELXc 213.870	<b>188712</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	10.7	102.9
2x9	TC-SEL	2G7	2 x 8.0	ELXc 213.870	<b>188712</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	19.4	102.9
10	TC-DEL	G24q-1	1 x 9.5	ELXc 213.870	<b>188712</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	10.9	99.2
2x10	TC-DEL	G24q-1	2 x 9.5	ELXc 213.870	<b>188712</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	20.5	98.8
11	TC-SEL	2G7	1 x 11.0	ELXc 213.870	<b>188712</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	14.7	110.1
2x11	TC-SEL	2G7	2 x 11.0	ELXc 213.870	<b>188712</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	27.9	116.1
13	TC-DEL/TEL	G24q-1/GX24q-1	1 x 12.5	ELXc 213.870	<b>188712</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	15.0	102.9
2x13	TC-DEL/TEL	G24q-1/GX24q-1	2 x 12.5	ELXc 213.870	<b>188712</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	28.1	110.9
18	TC-DEL/TEL	G24q-2/GX24q-2	1 x 16.5	ELXc 218.871	<b>188713</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	21.0	104.8
	TC-F/L	2G10/2G11	1 x 16.0	ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	18.0	102.0
2x18	TC-DEL/TEL	G24q-2/GX24q-2	2 x 16.5	ELXc 218.871	<b>188713</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	38.0	100.7
	TC-F/L	2G10/2G11	2 x 16.0	ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	35.0	104.3
22	T-R5	2GX13	1 x 22.0	ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	26.0	103.0
				ELXc 128.869	<b>188590</b>	220-240	A2 BAT	-20 to 50	max. 70	K2	25.0	96.7
22+40	T-R5	2GX13	1 x 22+40	ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	68.0	100.0
2x22	T-R5	2GX13	2 x 22.0	ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	48.5	105.8
24	TC-F/L	2G10/2G11	1 x 22.0	ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	27.0	105.0
	TC-F/L	2G10/2G11	1 x 22.5	ELXc 128.869	<b>188590</b>	220-240	A2	-20 to 50	max. 70	K2	25.0	95.8
2x24	TC-F/L	2G10/2G11	2 x 22.0	ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	48.5	106.2
				ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	47.0	102.0
26	TC-DEL/TEL	G24q-3/GX24q-3	1 x 24.0	ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	26.0	104.0
				ELXc 226.878	<b>183040</b>	220-240	A2 BAT	-20 to 55	max. 65	K2.1	28.0	104.0
				ELXc 226.878	<b>183108*</b>	220-240	A2 BAT	-20 to 55	max. 65	K2.1	28.0	104.0
2x26	TC-DEL/TEL	G24q-3/GX24q-3	2 x 24.0	ELXc 226.878	<b>183040</b>	220-240	A2 BAT	-20 to 55	max. 65	K2.1	50.0	101.0
				ELXc 226.878	<b>183108*</b>	220-240	A2 BAT	-20 to 55	max. 65	K2.1	50.0	101.0
				ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	53.0	106.1
				ELXc 257.836	<b>188400</b>	220-240	A2 BAT	-20 to 50	max. 70	K4	52.0	106.2
				ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	53.0	105.0

new  
new  
new  
new

Circuit diagrams see pages 255-259

\* Without cover cap on cord grip = built-in version

# Electronic Ballasts for TC and T Lamps

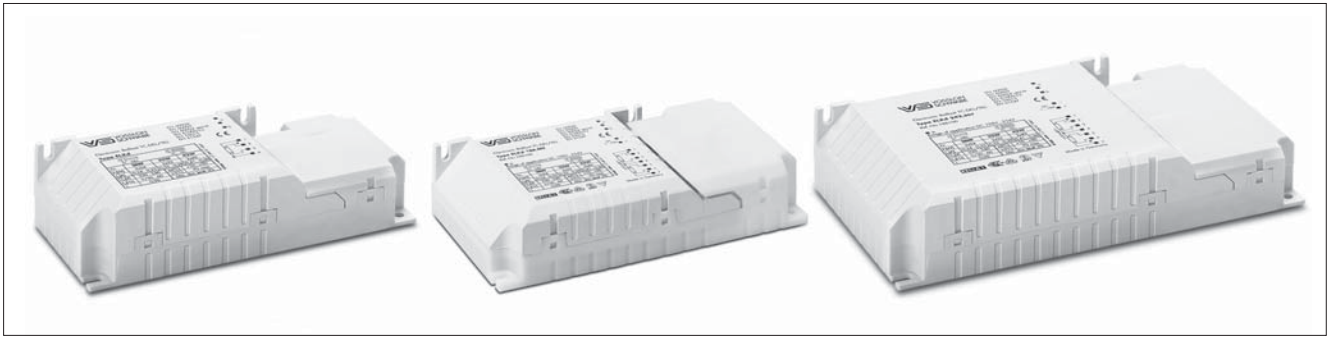

## ELXc – Compact warm start for compact fluorescent lamps – Independent ballasts

For ELXc 257.836 a

loop-through of the mains supply is possible

ELXc 213.870, 218.871, 142.872,

242.837, 155.378 have a second earth terminal

to ground the luminaires for example


- T5    TC    BUILT-IN    1-10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
28	TC-DD	GR10q	1 x 26.0	ELXc 128.869	<b>188590</b>	220-240	A2 BAT	-20 to 50	max. 70	K2	32.0	98.1
32	TC-TEL	GX24q-3	1 x 32.0	ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	33.0	102.0
2x32	TC-TEL	GX24q-3	2 x 32.0	ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	70.5	104.8
				ELXc 257.836	<b>188400</b>	220-240	A2 BAT	-20 to 50	max. 70	K4	70.0	109.4
36	TC-F/L	2G10/2G11	1 x 32.0	ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	34.0	105.0
2x36	TC-F/L	2G10/2G11	2 x 32.0	ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	70.5	101.8
38	TC-DD	GR10q	1 x 36.0	ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	38.0	95.0
2x38	TC-DD	GR10q	2 x 36.0	ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	79.2	101.3
40	TC-L	2G11	1 x 40.0	ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	43.0	99.0
		T-R5	2GX13	1 x 40.0	ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	41.0
2x40	TC-L	2G11	2 x 40.0	ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	88.0	101.3
		T-R5	2GX13	2 x 40.0	ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	88.0
42	TC-TEL	GX24q-4	1 x 42.0	ELXc 142.872	<b>188714</b>	220-240	A2 BAT	-20 to 50	max. 65	K2	45.0	99.0
2x42	TC-TEL	GX24q-4	2 x 43.0	ELXc 242.837	<b>188687</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	94.5	100.6
				ELXc 257.836	<b>188400</b>	220-240	A2 BAT	-20 to 50	max. 70	K4	94.0	104.9
55	TC-L	2G11	1 x 55.6	ELXc 155.378	<b>188681</b>	220-240	A2 BAT	-20 to 50	max. 70	K3	60.0	102.4
		T-R5	2GX13	1 x 55.6	ELXc 155.378	<b>188681</b>	220-240	A2 BAT	-20 to 50	max. 70	K3	60.0
57	TC-TEL	GX24q-5	1 x 57.0	ELXc 170.833	<b>188683</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	63.0	105.0
2x57	TC-TEL	GX24q-5	2 x 57.0	ELXc 257.836	<b>188400</b>	220-240	A2 BAT	-20 to 50	max. 70	K4	130.0	100.0
60	T-R5	2GX13	1 x 60.6	ELXc 155.378	<b>188681</b>	220-240	A2	-20 to 50	max. 70	K3	66.0	109.5
70	TC-TEL	GX24q-6	1 x 70.0	ELXc 170.833	<b>188683</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	77.0	110.0
80	TC-L	2G11	1 x 80.5	ELXc 155.378	<b>188681</b>	220-240	A2 BAT	-20 to 50	max. 70	K3	88.0	101.3


Circuit diagrams see pages 255-259

## ELXc – ECO EffectLine Warm Start for Compact Fluorescent Lamps


Electronic ballasts  
Casing: PC, white  
Mains voltage: 198–264 V  
Push-in terminals: 0.5–1.5 mm<sup>2</sup>  
RFI-suppressed  
For luminaires of protection class I  
Degree of protection: IP20  
For lighting systems with  
high switching frequency (> 5/day)  
EOL shut down approved acc. to EN 61347 Test 1

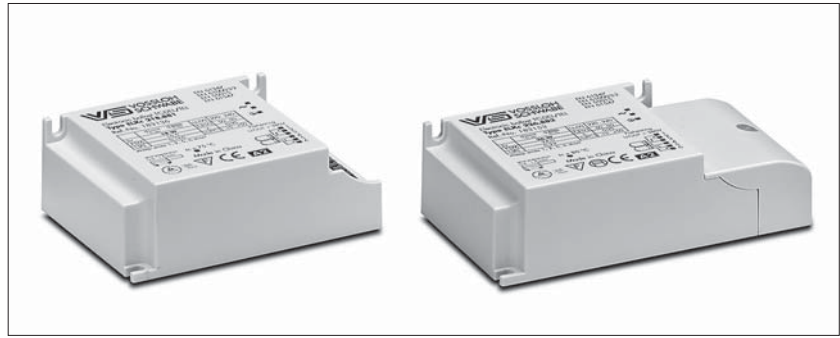

K1.1

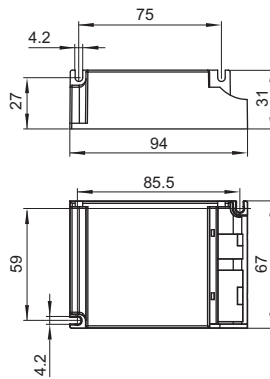

K1.1 with cord grip

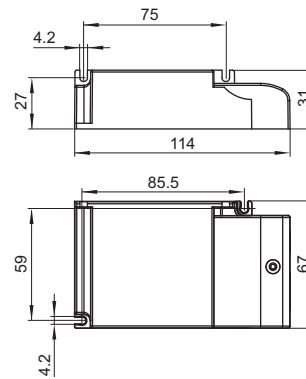

### ELXc – Warm start for compact fluorescent lamps – Built-in ballasts

- T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast								System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10 %	Energy efficiency	Power factor	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Output W	Luminous factor %	
<b>new</b> 18	TC-DEL/TEL	G24q-2/GX24q-2	1 x 16.5	ELXc 118.879	<b>183134</b>	220–240	A2	> 0.95	–10 to 50	max. 70	19.5	100	
<b>new</b> 2x18	TC-DEL/TEL	G24q-2/GX24q-2	2 x 16.5	ELXc 218.881	<b>183136</b>	220–240	A2	> 0.95	–15 to 50	max. 75	38.0	100	
<b>new</b> 26	TC-DEL/TEL	G24q-3/GX24q-3	1 x 24.0	ELXc 126.880	<b>183135</b>	220–240	A2	> 0.95	–10 to 50	max. 75	28.0	100	
<b>new</b> 2x26	TC-DEL/TEL	G24q-3/GX24q-3	2 x 24.0	ELXc 226.882	<b>183137</b>	220–240	A2	> 0.95	–15 to 50	max. 80	53.5	100	

Preliminary data

### ELXc – Compact warm start for compact fluorescent lamps – Independent ballasts

- T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast								System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10 %	Energy efficiency	Power factor	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Output W	Luminous factor %	
<b>new</b> 18	TC-DEL/TEL	G24q-2/GX24q-2	1 x 16.5	ELXc 118.879	<b>183150</b>	220–240	A2	> 0.95	–10 to 50	max. 70	19.5	100	
<b>new</b> 2x18	TC-DEL/TEL	G24q-2/GX24q-2	2 x 16.5	ELXc 218.881	<b>183152</b>	220–240	A2	> 0.95	–15 to 50	max. 75	38.0	100	
<b>new</b> 26	TC-DEL/TEL	G24q-3/GX24q-3	1 x 24.0	ELXc 126.880	<b>183151</b>	220–240	A2	> 0.95	–10 to 50	max. 75	28.0	100	
<b>new</b> 2x26	TC-DEL/TEL	G24q-3/GX24q-3	2 x 24.0	ELXc 226.882	<b>183153</b>	220–240	A2	> 0.95	–15 to 50	max. 80	53.5	100	

Preliminary data



## ELXc – Warm Start for Compact Fluorescent Lamps

Independent electronic ballasts  
 Casing: heat-resistant polyamide (K3)  
 Power factor: > 0.96  
 DC voltage  
     for operation: 176–264 V  
     for ignition: 198–264 V

Push-in terminals with lever opener: 0.5–1.5 mm<sup>2</sup>

**Mains and earth through-wiring on primary side is possible**

**Existing terminals: 2xL; 2xN; 3xPE**

RFI-suppressed

Constant power consumption

For luminaires of protection class I


Degree of protection: IP20

Fixing brackets for screws M4


for lateral or base mounting

For lighting systems with high switching frequency (> 5/day)

EOL shut down approved acc. to EN 61347 Test 2

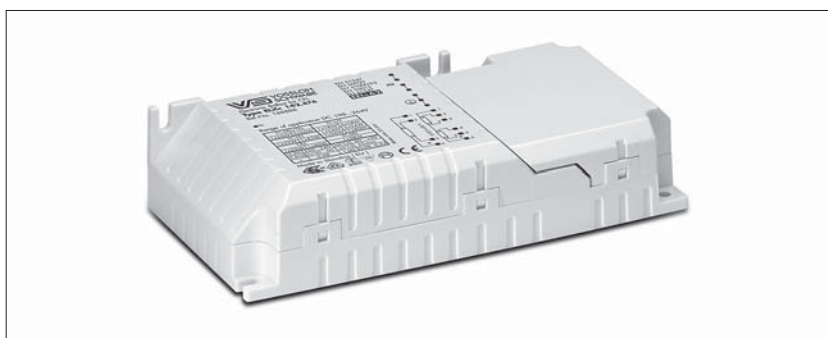

**K3 with cord grip**

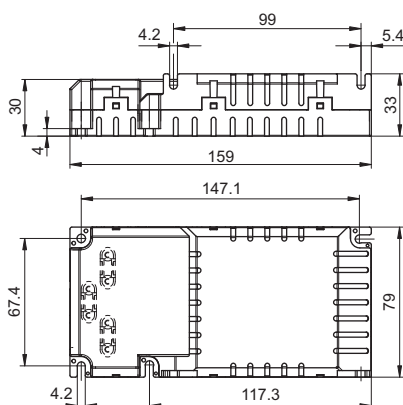

- T5     TC     BUILT-IN     1–10 V
- T8     INDEPENDENT     DALI/PUSH


Lamp				Electronic ballast								System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %	
9	TC-SEL	2G7	1 x 8.0	ELXc 213.874	<b>188886</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	10.7	102.9	
2x9	TC-SEL	2G7	2 x 8.0	ELXc 213.874	<b>188886</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	19.4	102.9	
10	TC-DEL	G24q-1	1 x 9.5	ELXc 213.874	<b>188886</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	10.9	99.2	
2x10	TC-DEL	G24q-1	2 x 9.5	ELXc 213.874	<b>188886</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	20.5	98.8	
11	TC-SEL	2G7	1 x 11.0	ELXc 213.874	<b>188886</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	14.7	110.1	
2x11	TC-SEL	2G7	2 x 11.0	ELXc 213.874	<b>188886</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	27.9	116.1	
13	TC-DEL/TEL	G24q-1/GX24q-1	1 x 12.5	ELXc 213.874	<b>188886</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	15.0	102.9	
2x13	TC-DEL/TEL	G24q-1/GX24q-1	2 x 12.5	ELXc 213.874	<b>188886</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	28.1	110.9	
18	TC-DEL/TEL	G24q-2/GX24q-2	1 x 16.5	ELXc 218.875	<b>188887</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	21.0	104.8	
	TC-F/L	2G10/2G11	1 x 16.0	ELXc 142.876	<b>188888</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	18.0	102.0	
2x18	TC-DEL/TEL	G24q-2/GX24q-2	2 x 16.5	ELXc 218.875	<b>188887</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	38.0	100.7	
	TC-F/L	2G10/2G11	2 x 16.0	ELXc 242.877	<b>188889</b>	220–240	A2	–20 to 50	max. 65	K3	35.0	104.3	
				ELXc 142.876	<b>188888</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	34.0	98.0	
22	T-R5	2GX13	1 x 22.0	ELXc 142.876	<b>188888</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	26.0	103.0	
22+40	T-R5	2GX13	1 x 22+40	ELXc 242.877	<b>188889</b>	220–240	A2	–20 to 50	max. 65	K3	68.0	100.0	
2x22	T-R5	2GX13	2 x 22.0	ELXc 242.877	<b>188889</b>	220–240	A2	–20 to 50	max. 65	K3	48.5	105.8	
24	TC-F/L	2G10/2G11	1 x 22.0	ELXc 142.876	<b>188888</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	27.0	105.0	
2x24	TC-F/L	2G10/2G11	2 x 22.0	ELXc 242.877	<b>188889</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	48.5	106.2	
				ELXc 142.876	<b>188888</b>	220–240	A2 BAT	–20 to 50	max. 65	K3	47.0	102.0	

Circuit diagrams see pages 255–259



## ELXc – Warm Start for Compact Fluorescent Lamps

ELXc – Warm start for compact fluorescent lamps – Independent ballasts

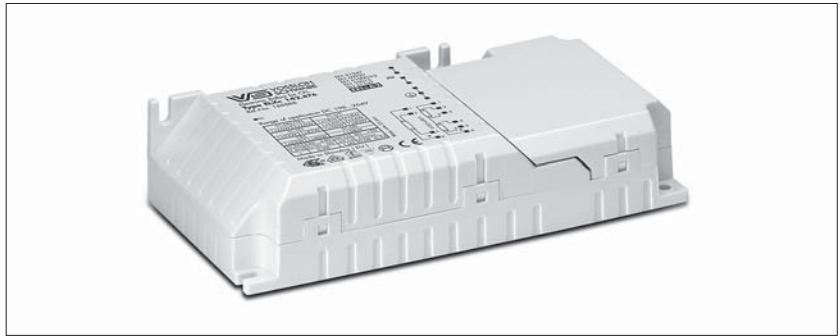

- T5     TC     BUILT-IN     1-10 V  
 T8     INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
26	TC-DEL/-TEL	G24q-3/GX24q-3	1 x 24.0	ELXc 142.876	<b>188888</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	26.0	104.0
2x26	TC-DEL/-TEL	G24q-3/GX24q-3	2 x 24.0	ELXc 242.877	<b>188889</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	53.0	106.1
				ELXc 142.876	<b>188888</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	53.0	105.0
32	TC-TEL	GX24q-3	1 x 32.0	ELXc 142.876	<b>188888</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	33.0	102.0
2x32	TC-TEL	GX24q-3	2 x 32.0	ELXc 242.877	<b>188889</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	70.5	104.8
36	TC-F/-L	2G10/2G11	1 x 32.0	ELXc 142.876	<b>188888</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	34.0	105.0
2x36	TC-F/-L	2G10/2G11	2 x 32.0	ELXc 242.877	<b>188889</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	70.5	101.8
38	TC-DD	GR10q	1 x 36.0	ELXc 142.876	<b>188888</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	38.0	95.0
2x38	TC-DD	GR10q	2 x 36.0	ELXc 242.877	<b>188889</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	79.2	101.3
40	TC-L	2G11	1 x 40.0	ELXc 142.876	<b>188888</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	43.0	99.0
	T-R5	2GX13	1 x 40.0	ELXc 142.876	<b>188888</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	41.0	96.0
2x40	TC-L	2G11	2 x 40.0	ELXc 242.877	<b>188889</b>	220-240	A2	-20 to 50	max. 65	K3	88.0	101.3
	T-R5	2GX13	2 x 40.0	ELXc 242.877	<b>188889</b>	220-240	A2	-20 to 50	max. 65	K3	88.0	101.1
42	TC-TEL	GX24q-4	1 x 42.0	ELXc 142.876	<b>188888</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	45.0	99.0
2x42	TC-TEL	GX24q-4	2 x 43.0	ELXc 242.877	<b>188889</b>	220-240	A2 BAT	-20 to 50	max. 65	K3	94.5	100.6

Circuit diagrams see pages 255-259

## ELXd – Dimmable for TC-DEL, TC-TEL Lamps

Electronic ballasts

Casing: heat-resistant polycarbonate

**Dimming range:**

**approx. 3–100% of lamp power**

Push-in terminals with lever opener: 0.5–1.5 mm<sup>2</sup>

RFI-suppressed

Degree of protection: IP20

For luminaires of protection class I

Fixing brackets for screws M4


for lateral or base mounting

For lighting systems with

high switching frequency (> 5/day)


EOL shut down approved

acc. to EN 61347 Test 2

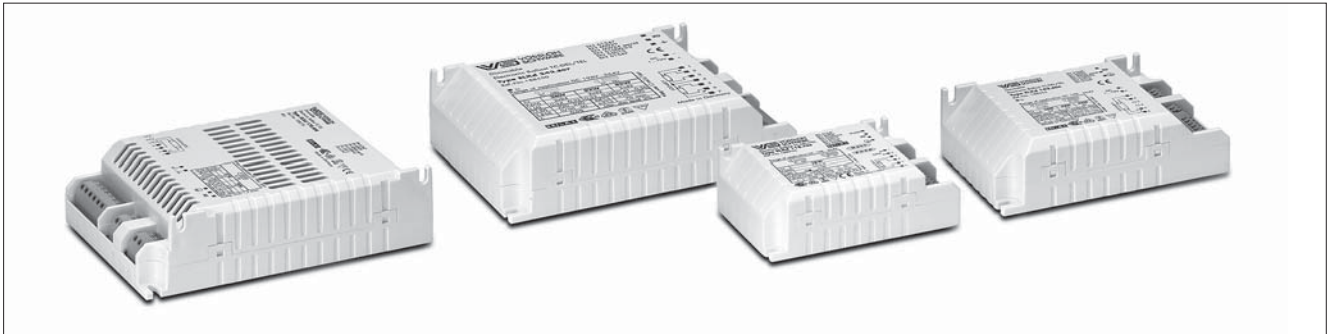


### Electronic built-in ballasts


#### K2

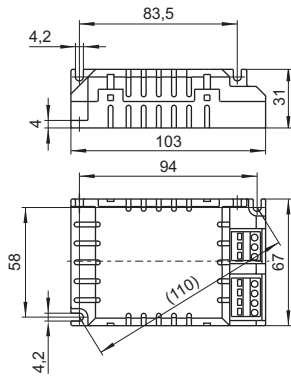


#### K3

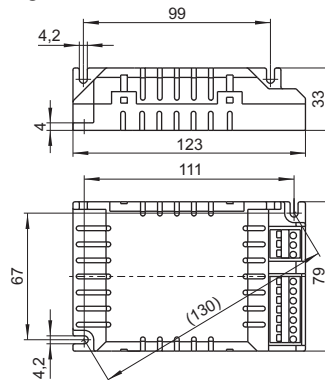


#### K4

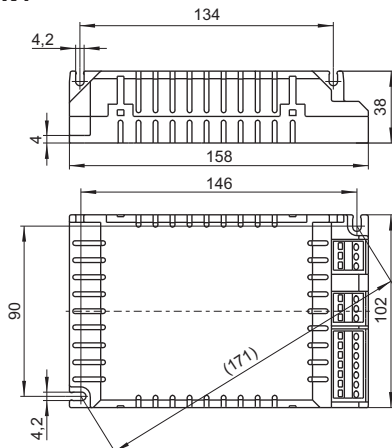

#### K4+ with venting slits

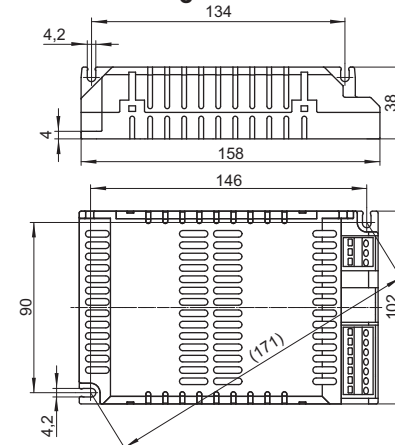


## ELXd – Dimmable for TC-DEL, TC-TEL Lamps

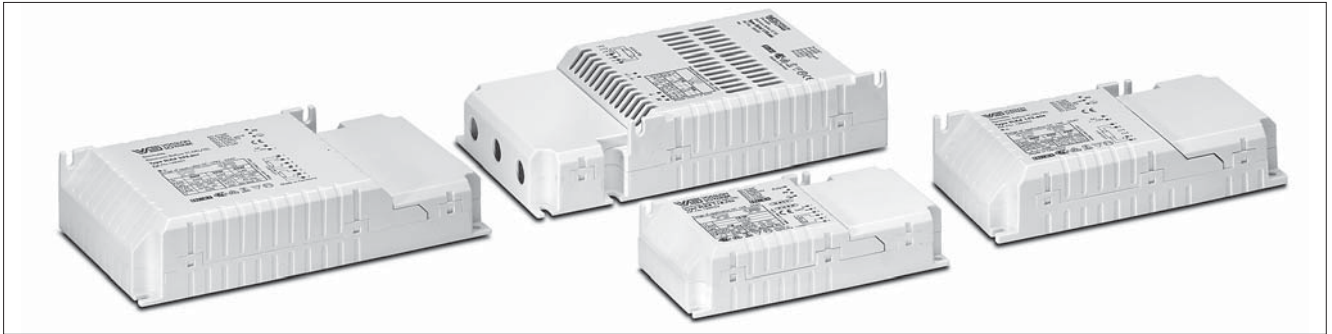


### Independent electronic ballasts


#### K2 with cord grip

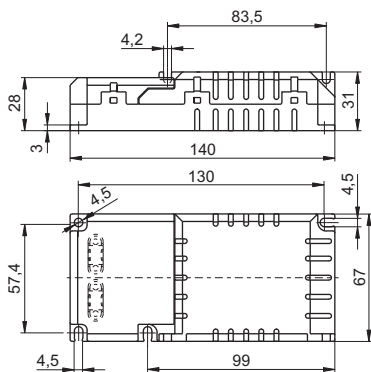


#### K3 with cord grip

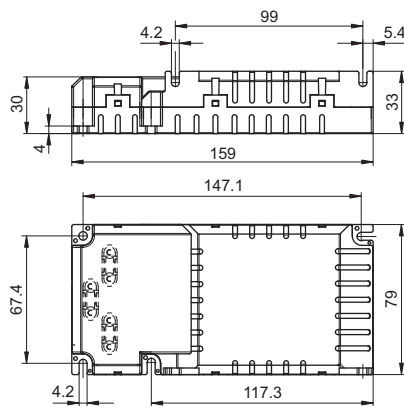

#### K4 with cord grip

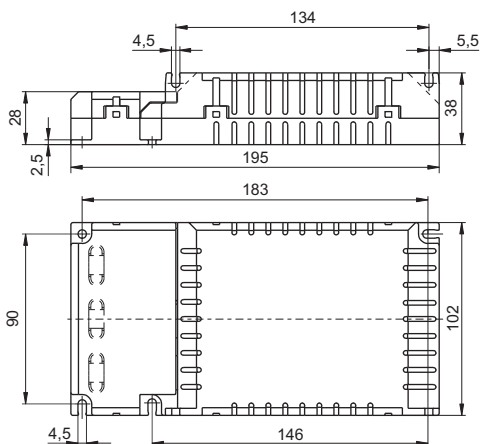

#### K4+ with cord grip and venting slits

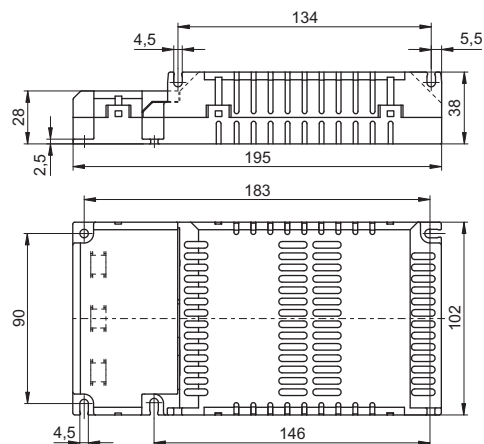

# Electronic Ballasts for TC and T Lamps

## ELXd – Dimmable 1–10 V for TC-DEL, TC-TEL lamps

Electronic built-in ballasts

Casing: K3, K4 and K4+ with venting slits

Control voltage: DC 1–10 V acc. to

EN 60929 with earth leakage current 0.5 mA (protected if connected to mains voltage)

For use with open- or closed-loop control units

Power factor: 0.98 at 100% operation

DC voltage

for operation: 176–264 V

for ignition: 198–264 V

T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
18	TC-DEL/-TEL	G24q-2/GX24q-2	1 x 16.5	ELXd 118.802	<b>188564</b>	220–240	A1 BAT	5 to 55	max. 70	K3	21.0	100.0
2x18	TC-DEL/-TEL	G24q-2/GX24q-2	2 x 16.5	ELXd 218.803	<b>188549</b>	220–240	A1 BAT	5 to 55	max. 70	K4	38.0	100.0
26	TC-DEL/-TEL	G24q-3/GX24q-3	1 x 24.0	ELXd 142.806	<b>188565</b>	220–240	A1 BAT	10 to 50	max. 70	K3	27.0	100.0
2x26	TC-DEL/-TEL	G24q-3/GX24q-3	2 x 24.0	ELXd 242.807	<b>188550</b>	220–240	A1 BAT	10 to 50	max. 70	K4	53.0	100.0
				ELXd 226.801	<b>188431</b>	220–240	A1 BAT	10 to 50	max. 70	K3	54.0	100.0
32	TC-TEL	GX24q-3	1 x 32.0	ELXd 142.806	<b>188565</b>	220–240	A1 BAT	10 to 50	max. 70	K3	36.0	100.0
2x32	TC-TEL	GX24q-3	2 x 32.0	ELXd 242.807	<b>188550</b>	220–240	A1 BAT	10 to 50	max. 70	K4	71.0	100.0
42	TC-TEL	GX24q-4	1 x 43.0	ELXd 142.806	<b>188565</b>	220–240	A1 BAT	10 to 50	max. 70	K3	46.0	100.0
2x42	TC-TEL	GX24q-4	2 x 43.0	ELXd 242.807	<b>188550</b>	220–240	A1 BAT	10 to 50	max. 70	K4	92.0	100.0
57	TC-TEL	GX24q-5	1 x 57.0	ELXd 170.808	<b>188276</b>	220–240	A1 BAT	10 to 55	max. 60	K4+	62.0	100.0
70	TC-TEL	GX24q-6	1 x 70.0	ELXd 170.808	<b>188276</b>	220–240	A1 BAT	10 to 55	max. 60	K4+	77.0	100.0

Circuit diagrams see pages 255–259

## ELXd – Dimmable 1–10 V for TC-DEL, TC-TEL lamps

Independent electronic ballasts

Casing with cord grip: K3, K4 and K4+ with venting slits

Control voltage: DC 1–10 V acc. to

EN 60929 with earth leakage current 0.5 mA (protected if connected to mains voltage)

For use with open- or closed-loop control units

Power factor: 0.98 at 100% operation

DC voltage

for operation: 176–264 V

for ignition: 198–264 V

T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
18	TC-DEL/-TEL	G24q-2/GX24q-2	1 x 16.5	ELXd 118.802	<b>188694</b>	220–240	A1 BAT	5 to 55	max. 70	K3	21.0	100.0
2x18	TC-DEL/-TEL	G24q-2/GX24q-2	2 x 16.5	ELXd 218.803	<b>188696</b>	220–240	A1 BAT	5 to 55	max. 70	K4	38.0	100.0
26	TC-DEL/-TEL	G24q-3/GX24q-3	1 x 24.0	ELXd 142.806	<b>188695</b>	220–240	A1 BAT	10 to 50	max. 70	K3	27.0	100.0
2x26	TC-DEL/-TEL	G24q-3/GX24q-3	2 x 24.0	ELXd 242.807	<b>188697</b>	220–240	A1 BAT	10 to 50	max. 70	K4	53.0	100.0
				ELXd 226.801	<b>188490</b>	220–240	A1 BAT	10 to 50	max. 70	K3	54.0	100.0
32	TC-TEL	GX24q-3	1 x 32.0	ELXd 142.806	<b>188695</b>	220–240	A1 BAT	10 to 50	max. 70	K3	36.0	100.0
2x32	TC-TEL	GX24q-3	2 x 32.0	ELXd 242.807	<b>188697</b>	220–240	A1 BAT	10 to 50	max. 70	K4	71.0	100.0
42	TC-TEL	GX24q-4	1 x 43.0	ELXd 142.806	<b>188695</b>	220–240	A1 BAT	10 to 50	max. 70	K3	46.0	100.0
2x42	TC-TEL	GX24q-4	2 x 43.0	ELXd 242.807	<b>188697</b>	220–240	A1 BAT	10 to 50	max. 70	K4	92.0	100.0
57	TC-TEL	GX24q-5	1 x 57.0	ELXd 170.808	<b>188495</b>	220–240	A1 BAT	10 to 55	max. 60	K4+	62.0	100.0
70	TC-TEL	GX24q-6	1 x 70.0	ELXd 170.808	<b>188495</b>	220–240	A1 BAT	10 to 55	max. 60	K4+	77.0	100.0

Circuit diagrams see pages 255–259

# Electronic Ballasts for TC and T Lamps

## ELXd – Dimmable with push key or DALI for TC-DEL, TC-TEL lamps

Electronic ballasts

PUSH: dimmable with usual push key and sensor

DALI: poles are not polarity sensitive (protected if connected to mains voltage) for use with DALI compatible control units

Automatic restart after lamp has been changed

Power factor: > 0.95 at 100% operation

DC voltage

for operation: 176-264 V

for ignition: 198-264 V

Standby power consumption: ≤ 0.5 W

Complete implementation of the DALI-standard:

addressable, memory store for scenes and groups, revertive information communication, physical and

RND-selection, standardized lamp characteristic

Low-power design ensures very low standby

power consumption

Compatible with IEC 62386

## Electronic built-in ballasts

T5    TC    BUILT-IN    1-10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
14	TC-TEL	GR14q-1	1 x 16.7	ELXd 117.715	<b>188864</b>	220-240	A1 BAT	10 to 50	max. 65	K2	18.0	103.8
2x14	TC-TEL	GR14q-1	2 x 14.0	ELXd 217.717	<b>188866</b>	220-240	A1 BAT	10 to 60	max. 70	K3	33.8	95.9
17	TC-TEL	GR14q-1	1 x 20.0	ELXd 117.715	<b>188864</b>	220-240	A1 BAT	10 to 50	max. 65	K2	22.0	105.3
2x17	TC-TEL	GR14q-1	2 x 17.0	ELXd 217.717	<b>188866</b>	220-240	A1 BAT	10 to 60	max. 70	K3	40.7	95.2
18	TC-DEL/TEL	G24q-2/GX24q-2	1 x 16.5	ELXd 118.705	<b>188952</b>	220-240	A1 BAT	10 to 50	max. 65	K2	20.2	105.5
2x18	TC-DEL/TEL	G24q-2/GX24q-2	2 x 18.0	ELXd 218.707	<b>188954</b>	220-240	A1 BAT	10 to 50	max. 70	K3	40.0	100.1
26	TC-DEL/TEL	G24q-3/GX24q-3	1 x 25.0	ELXd 142.709	<b>188923</b>	220-240	A1 BAT	10 to 50	max. 65	K2	27.5	106.8
2x26	TC-DEL/TEL	G24q-3/GX24q-3	2 x 24.0	ELXd 242.711	<b>188974</b>	220-240	A1 BAT	10 to 50	max. 70	K3	56.0	97.9
32	TC-TEL	GX24q-3	1 x 32.0	ELXd 142.709	<b>188923</b>	220-240	A1 BAT	10 to 50	max. 65	K2	34.5	106.3
2x32	TC-TEL	GX24q-3	2 x 32.0	ELXd 242.711	<b>188974</b>	220-240	A1 BAT	10 to 50	max. 70	K3	69.0	97.6
42	TC-TEL	GX24q-4	1 x 42.0	ELXd 142.709	<b>188923</b>	220-240	A1 BAT	10 to 50	max. 65	K2	45.0	103.8
2x42	TC-TEL	GX24q-4	2 x 42.0	ELXd 242.711	<b>188974</b>	220-240	A1 BAT	10 to 50	max. 70	K3	90.0	99.1

Circuit diagrams see pages 255-259

## Independent electronic ballasts

T5    TC    BUILT-IN    1-10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
14	TC-TEL	GR14q-1	1 x 16.7	ELXd 117.715	<b>188865</b>	220-240	A1 BAT	10 to 50	max. 65	K2	18.0	103.8
2x14	TC-TEL	GR14q-1	2 x 14.0	ELXd 217.717	<b>188867</b>	220-240	A1 BAT	10 to 60	max. 70	K3	33.8	95.9
17	TC-TEL	GR14q-1	1 x 20.0	ELXd 117.715	<b>188865</b>	220-240	A1 BAT	10 to 50	max. 65	K2	22.0	105.3
2x17	TC-TEL	GR14q-1	2 x 17.0	ELXd 217.717	<b>188867</b>	220-240	A1 BAT	10 to 60	max. 70	K3	40.7	95.2
18	TC-DEL/TEL	G24q-2/GX24q-2	1 x 16.5	ELXd 118.705	<b>188953</b>	220-240	A1 BAT	10 to 50	max. 65	K2	20.2	105.5
2x18	TC-DEL/TEL	G24q-2/GX24q-2	2 x 18.0	ELXd 218.707	<b>188955</b>	220-240	A1 BAT	10 to 60	max. 70	K3	40.0	100.1
26	TC-DEL/TEL	G24q-3/GX24q-3	1 x 25.0	ELXd 142.709	<b>188924</b>	220-240	A1 BAT	10 to 50	max. 65	K2	27.5	106.3
2x26	TC-DEL/TEL	G24q-3/GX24q-3	2 x 24.0	ELXd 242.711	<b>188975</b>	220-240	A1 BAT	10 to 50	max. 70	K3	56.0	97.9
32	TC-TEL	GX24q-3	1 x 32.0	ELXd 142.709	<b>188924</b>	220-240	A1 BAT	10 to 50	max. 65	K2	34.8	106.3
2x32	TC-TEL	GX24q-3	2 x 32.0	ELXd 242.711	<b>188975</b>	220-240	A1 BAT	10 to 50	max. 70	K3	69.0	97.6
42	TC-TEL	GX24q-4	1 x 42.0	ELXd 142.709	<b>188924</b>	220-240	A1 BAT	10 to 50	max. 65	K2	45.0	103.8
2x42	TC-TEL	GX24q-4	2 x 42.0	ELXd 242.711	<b>188975</b>	220-240	A1 BAT	10 to 50	max. 70	K3	90.0	99.1

Circuit diagrams see pages 255-259

## ELXs – Warm Start for T5 and T8 Lamps

Electronic built-in ballasts

Casing: heat-resistant polyamide

Power factor: approx. 0.6

(depending on the lamp output)

DC voltage operation: 198 - 264 V

Push-in terminals with lever opener: 0.5-1.5 mm<sup>2</sup>

RFI-suppressed

For luminaires of protection class I and II


Degree of protection: IP20

Fixing slots for screws M4


For lighting systems with high switching frequency (> 5/day)

EOL shut down approved


acc. to EN 61347 Test 2

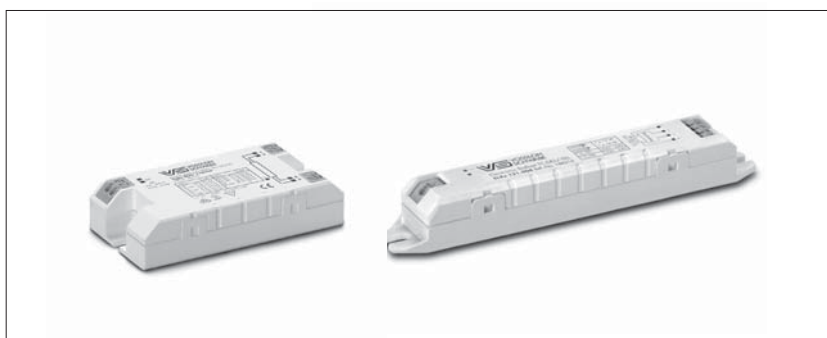

**K20**



**K21**

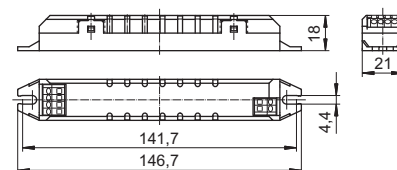

- T5     TC     BUILT-IN     1-10 V
- T8     INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast							System
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W
<b>For T5 lamps</b>											
4	T5	G5	1 x 4.6	ELXs 116.900	<b>188661</b>	220-240	A3	-15 to 55	max. 75	K20	5.9
			1 x 4.6	ELXs 116.903	<b>188662</b>	220-240	A3	-15 to 55	max. 75	K21	5.9
6	T5	G5	1 x 6.0	ELXs 116.900	<b>188661</b>	220-240	A2	-15 to 55	max. 75	K20	7.5
			1 x 6.0	ELXs 116.903	<b>188662</b>	220-240	A2	-15 to 55	max. 75	K21	7.5
8	T5	G5	1 x 7.1	ELXs 116.900	<b>188661</b>	220-240	A2	-15 to 55	max. 75	K20	8.6
			1 x 7.1	ELXs 116.903	<b>188662</b>	220-240	A2	-15 to 55	max. 75	K21	8.6
13	T5	G5	1 x 12.0	ELXs 116.900	<b>188661</b>	220-240	A2	-15 to 55	max. 75	K20	13.1
			1 x 12.0	ELXs 116.903	<b>188662</b>	220-240	A2	-15 to 55	max. 75	K21	13.1
14	T5	G5	1 x 14.1	ELXs 121.901	<b>188663</b>	220-240	A2	-15 to 55	max. 80	K20	16.3
			1 x 14.1	ELXs 121.904	<b>188664</b>	220-240	A2	-15 to 55	max. 80	K21	16.3
21	T5	G5	1 x 19.1	ELXs 121.901	<b>188663</b>	220-240	A2	-15 to 55	max. 80	K20	21.8
			1 x 19.1	ELXs 121.904	<b>188664</b>	220-240	A2	-15 to 55	max. 80	K21	21.8
24	T5	G5	1 x 20.1	ELXs 124.902	<b>188665</b>	220-240	A2	-15 to 55	max. 85	K20	21.5
			1 x 20.1	ELXs 124.905	<b>188666</b>	220-240	A2	-15 to 55	max. 85	K21	21.5
<b>For T8 lamps</b>											
14	T8	G13	1 x 13.5	ELXs 124.902	<b>188665</b>	220-240	A2	-15 to 55	max. 85	K20	16.2
			1 x 13.5	ELXs 124.905	<b>188666</b>	220-240	A2	-15 to 55	max. 85	K21	16.2
15	T8	G13	1 x 14.1	ELXs 124.902	<b>188665</b>	220-240	A2	-15 to 55	max. 85	K20	17.6
			1 x 14.1	ELXs 124.905	<b>188666</b>	220-240	A2	-15 to 55	max. 85	K21	17.6
16	T8	G13	1 x 12.0	ELXs 116.900	<b>188661</b>	220-240	A2	-15 to 55	max. 75	K20	13.4
			1 x 12.0	ELXs 116.903	<b>188662</b>	220-240	A2	-15 to 55	max. 75	K21	13.4
18	T8	G13	1 x 15.9	ELXs 124.902	<b>188665</b>	220-240	A2	-15 to 55	max. 85	K20	18.5
			1 x 15.9	ELXs 124.905	<b>188666</b>	220-240	A2	-15 to 55	max. 85	K21	18.5

Circuit diagrams see pages 255-259

## ELXc – Warm Start for T5 and T8 Lamps

Slim independent electronic ballasts

With cord grip for leads:

H03VVH2-F 2 x 0.75 mm<sup>2</sup>

Preheating with adjustable lamp output

Casing: heat-resistant polyamide

DC voltage operation: 198–255 V

Push-in terminals: 0.5–1.5 mm<sup>2</sup>

RFI-suppressed

For luminaires of protection class I

Degree of protection: IP20

Fixing slots for screws M4


Automatic restart after lamp has been changed

For lighting systems with


high switching frequency (> 5/day)

EOL shut down approved

acc. to EN 61347 Test 2

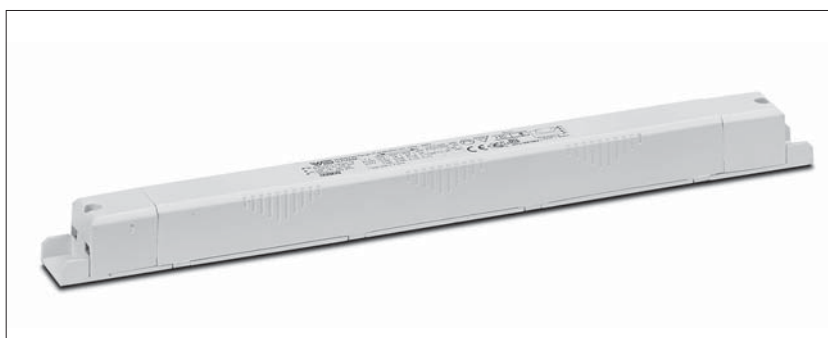

K7.3

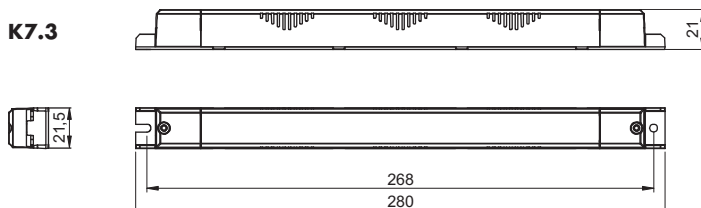

- T5     TC     BUILT-IN     1-10 V
- T8         INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast								System	
Output	Type	Base	Power consumption	Type	Ref. No.	Voltage AC	Mains current	Energy efficiency	Power factor	Ambient temperature	Casing temperature	Output	Luminous factor
W			W			50, 60 Hz	mA			t <sub>a</sub> (°C)	t <sub>c</sub> (°C)	W	%

**For T5 lamps**

<b>new</b>	14	T5	G5	1 x 13.2	ELXc 135.225	<b>183103</b>	220-240	60-80	A2	> 0.90	-25 to 50	max. 90	16,3	101,0
<b>new</b>	21	T5	G5	2 x 20.7	ELXc 135.225	<b>183103</b>	220-240	80-100	A2	> 0.92	-25 to 50	max. 90	23,1	100,0
<b>new</b>	28	T5	G5	1 x 27.8	ELXc 135.225	<b>183103</b>	220-240	110-130	A2	> 0.95	-25 to 50	max. 90	30,1	100,0
<b>new</b>	35	T5	G5	2 x 34.7	ELXc 135.225	<b>183103</b>	220-240	150-180	A2	> 0.95	-25 to 50	max. 90	36,9	98,0


**For T8 lamps**

<b>new</b>	15	T8	G13	1 x 13.5	ELXc 136.226	<b>183104</b>	220-240	60-80	A2	> 0.93	-25 to 50	max. 90	15,8	105,0
<b>new</b>	18	T8	G13	1 x 16.0	ELXc 136.226	<b>183104</b>	220-240	80-100	A2	> 0.93	-25 to 50	max. 90	18,1	102,0
<b>new</b>	30	T8	G13	1 x 24.0	ELXc 136.226	<b>183104</b>	220-240	110-130	A2	> 0.95	-25 to 50	max. 90	33,8	105,0
<b>new</b>	36	T8	G13	1 x 32.0	ELXc 136.226	<b>183104</b>	220-240	150-180	A2	> 0.95	-25 to 50	max. 90	34,5	97,0


## ELXc – Warm Start for T5 and T8 Lamps

Electronic built-in ballasts  
 Casing: metal  
 Power factor:  $\geq 0.95$   
 RFI-suppressed  
 For luminaires of protection class I


Degree of protection: IP20  
 For lighting systems with  
 high switching frequency ( $> 5/\text{day}$ )

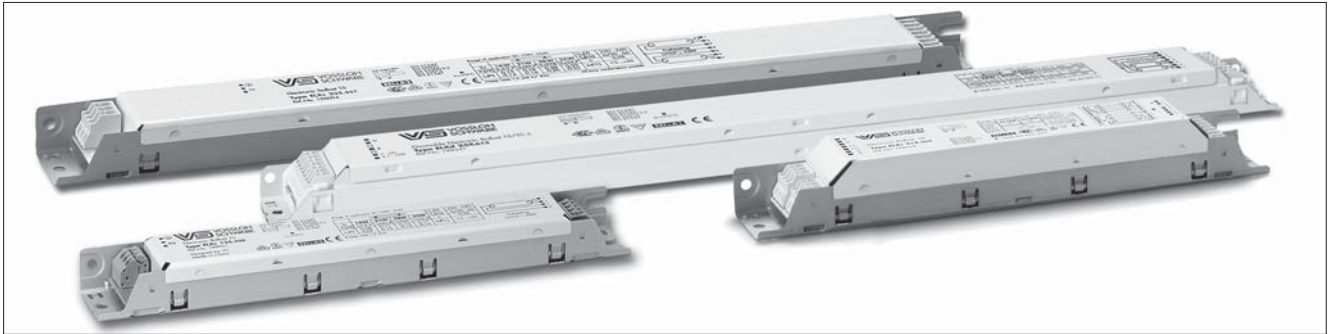


### M6

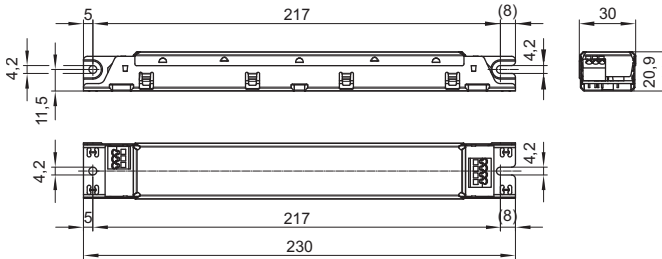


### M8

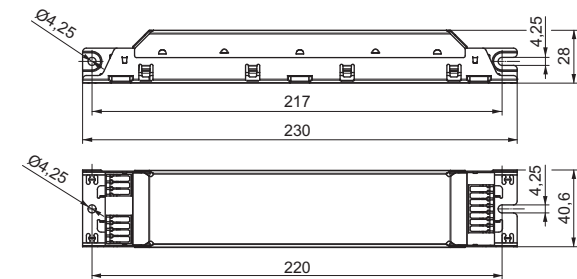

### M10/M11

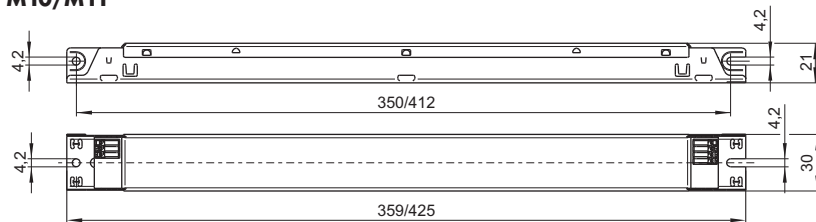

### M22/M24

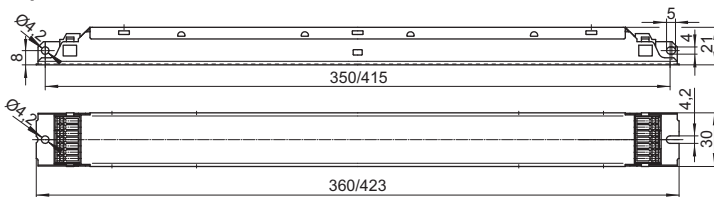

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10



## ELXc – Warm start for T5 lamps with lamp detection

DC voltage

for operation: 176-276 V

for ignition: 198-264 V

Push-in terminals: 0,5-1 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

EOL shut down approved

acc. to EN 61347 Test 2

Automatic lamp detection (T5 HO/HE)

Optimum pre-heating of the filament ensures

lamps can be ignited within 1 second.

T5     TC     BUILT-IN     1-10 V  
 T8     INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
14	T5	G5	1 x 14.0	ELXc 139.632	<b>188945</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	16.0	100.0
2x14	T5	G5	2 x 14.0	ELXc 239.635	<b>188948</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	31.0	100.0
21	T5	G5	1 x 21.0	ELXc 139.632	<b>188945</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	24.0	100.0
2x21	T5	G5	2 x 20.5	ELXc 239.635	<b>188948</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	45.0	100.0
24	T5	G5	1 x 23.0	ELXc 139.632	<b>188945</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	26.0	100.0
2x24	T5	G5	2 x 23.0	ELXc 239.635	<b>188948</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	50.0	100.0
28	T5	G5	1 x 28.0	ELXc 154.633	<b>188946</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	32.0	100.0
2x28	T5	G5	2 x 28.0	ELXc 254.636	<b>188949</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	61.0	100.0
35	T5	G5	1 x 35.0	ELXc 154.633	<b>188946</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	38.0	100.0
			1 x 35.0	ELXc 180.634	<b>188947</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	38.0	100.0
2x35	T5	G5	2 x 35.0	ELXc 254.636	<b>188949</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	76.0	100.0
			2 x 35.0	ELXc 280.637	<b>188950</b>	220-240	A2 BAT	-20 to 50	max. 75	M24	75.0	100.0
39	T5	G5	1 x 38.0	ELXc 139.632	<b>188945</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	41.0	100.0
2x39	T5	G5	2 x 38.0	ELXc 239.635	<b>188948</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	81.0	100.0
49	T5	G5	1 x 49.0	ELXc 154.633	<b>188946</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	53.0	100.0
			1 x 49.0	ELXc 180.634	<b>188947</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	53.0	100.0
2x49	T5	G5	2 x 49.0	ELXc 254.636	<b>188949</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	105.0	100.0
			2 x 49.0	ELXc 280.637	<b>188950</b>	220-240	A2 BAT	-20 to 50	max. 75	M24	104.0	100.0
54	T5	G5	1 x 54.0	ELXc 154.633	<b>188946</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	58.0	100.0
2x54	T5	G5	2 x 54.0	ELXc 254.636	<b>188949</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	115.0	100.0
80	T5	G5	1 x 80.0	ELXc 180.634	<b>188947</b>	220-240	A2 BAT	-20 to 50	max. 75	M22	85.0	100.0
2x80	T5	G5	2 x 80.0	ELXc 280.637	<b>188950</b>	220-240	A2 BAT	-20 to 50	max. 75	M24	165.0	100.0

Circuit diagrams see pages 255-259

## ELXc – Warm Start for T5 and T8 Lamps

DC voltage

for operation: 176-264 V

for ignition: 198-264 V

(ELXc 135.856, 235.857, 149.858, 154.864,  
180.866, 270.206; 280.538:

DC voltage cannot be reduced to 176 V)

Push-in terminals: 0.5-1 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads HO5V-U 0.5

EOL shut down approved

acc. to EN 61347 Test 2 (for T5)

EOL shut down (for T8)

T5     TC     BUILT-IN     1-10 V  
 T8     INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
<b>For T5 lamps</b> – Casing: M8, M10 and M11												
14	T5	G5	1 x 14.0	ELXc 135.856	<b>188093</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	17.0	110.7
2x14	T5	G5	2 x 14.0	ELXc 235.857	<b>188094</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	33.4	107.0
3x14	T5	G5	3 x 14.0	ELXc 414.868	<b>188438</b>	220-240	A2 BAT	-15 to 55	max. 70	M8	48.0	105.4
4x14	T5	G5	4 x 14.0	ELXc 414.868	<b>188438</b>	220-240	A2 BAT	-15 to 55	max. 70	M8	63.0	102.3
21	T5	G5	1 x 21.0	ELXc 135.856	<b>188093</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	24.0	107.4
2x21	T5	G5	2 x 21.0	ELXc 235.857	<b>188094</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	50.2	110.6
24	T5	G5	1 x 22.5	ELXc 140.862	<b>188140</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	27.0	114.0
2x24	T5	G5	2 x 22.5	ELXc 240.863	<b>188616</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	51.0	107.4
3x24	T5	G5	3 x 22.5	ELXc 424.223	<b>183039</b>	220-240	A2 BAT	-15 to 55	max. 75	M8	78.0	103.7
4x24	T5	G5	4 x 22.5	ELXc 424.223	<b>183039</b>	220-240	A2	-15 to 55	max. 75	M8	101.7	103.5
28	T5	G5	1 x 28.0	ELXc 135.856	<b>188093</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	32.0	104.9
2x28	T5	G5	2 x 28.0	ELXc 235.857	<b>188094</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	60.6	106.2
3x28	T5	G5	3 x 27.9	ELXc 328.224	<b>183094</b>	220-240	A2	-15 to 55	max. 70	M8	89.9	100.0
35	T5	G5	1 x 35.0	ELXc 135.856	<b>188093</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	39.5	102.7
2x35	T5	G5	2 x 35.0	ELXc 235.857	<b>188094</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	74.5	102.5
39	T5	G5	1 x 38.0	ELXc 140.862	<b>188140</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	43.0	107.0
2x39	T5	G5	2 x 38.0	ELXc 240.863	<b>188616</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	82.0	97.9
49	T5	G5	1 x 49.0	ELXc 149.858	<b>188095</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	54.0	102.5
2x49	T5	G5	2 x 49.0	ELXc 249.859	<b>188617</b>	220-240	A2 BAT	-15 to 50	max. 70	M10	113.0	106.6
54	T5	G5	1 x 54.0	ELXc 154.864	<b>188142</b>	220-240	A2 BAT	-15 to 55	max. 65	M10	59.0	101.1
2x54	T5	G5	2 x 54.0	ELXc 254.865	<b>188618</b>	220-240	A2 BAT	-15 to 50	max. 70	M10	119.0	106.0
80	T5	G5	1 x 80.0	ELXc 180.866	<b>188144</b>	220-240	A2 BAT	-15 to 55	max. 70	M10	87.0	97.6
2x80	T5	G5	2 x 80.0	ELXc 280.538	<b>188619</b>	220-240	A2 BAT	-15 to 50	max. 70	M11	175.0	97.2
<b>For T8 lamps</b> – Casing: M8												
3x18	T8	G13	3 x 16.0	ELXc 418.204	<b>188744</b>	220-240	A2 BAT	-15 to 55	max. 70	M8	56.0	100.8
4x18	T8	G13	4 x 16.0	ELXc 418.204	<b>188744</b>	220-240	A2 BAT	-15 to 55	max. 70	M8	71.5	98.9
3x36	T8	G13	3 x 32.0	ELXc 336.214	<b>188595</b>	220-240	A2 BAT	-15 to 50	max. 65	M8	105.0	99.4

Circuit diagrams see pages 255-259

new

1

2

3

4

5

6

7

8

9

10

## ELXc EffectLine – Warm start

### Warm start for T5 and T8 lamps – Casing: M6, M8 and M10

DC voltage

for operation: 176–264 V

for ignition: 198–264 V

(not possible for T8)

Push-in terminals with lever opener: 0.5–1.5 mm<sup>2</sup>

EOL shut down approved

acc. to EN 61347 Test 2 (for T5)

EOL shut down (for T8)

T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %

#### For T5 lamps – Casing: M6 and M10

14	T5	G5	1 x 14.3	ELXc 135.220	<b>188921</b>	220–240	A2 BAT	–15 to 55	max. 70	M6	17.0	104.8
2x14	T5	G5	2 x 14.3	ELXc 235.221	<b>188922</b>	220–240	A2 BAT	–15 to 55	max. 70	M10	34.5	101.9
21	T5	G5	1 x 20.4	ELXc 135.220	<b>188921</b>	220–240	A2 BAT	–15 to 55	max. 70	M6	23.3	106.9
2x21	T5	G5	2 x 21.4	ELXc 235.221	<b>188922</b>	220–240	A2 BAT	–15 to 55	max. 70	M10	48.3	104.9
28	T5	G5	1 x 26.7	ELXc 135.220	<b>188921</b>	220–240	A2 BAT	–15 to 55	max. 70	M6	29.9	107.5
2x28	T5	G5	2 x 28.7	ELXc 235.221	<b>188922</b>	220–240	A2 BAT	–15 to 55	max. 70	M10	62.1	109.0
35	T5	G5	1 x 32.6	ELXc 135.220	<b>188921</b>	220–240	A2 BAT	–15 to 55	max. 70	M6	36.5	103.0
2x35	T5	G5	2 x 35.6	ELXc 235.221	<b>188922</b>	220–240	A2 BAT	–15 to 55	max. 70	M10	78.2	100.8

#### For T8 lamps – Casing: M8

18	T8	G13	1 x 16.0	ELXc 136.207	<b>188704</b>	220–240	A2 BAT	–20 to 55	max. 60	M8	18.4	105.0
2x18	T8	G13	2 x 16.0	ELXc 236.208	<b>188705</b>	220–240	A2 BAT	–20 to 50	max. 60	M8	35.2	106.0
36	T8	G13	1 x 32.0	ELXc 136.207	<b>188704</b>	220–240	A2 BAT	–20 to 55	max. 60	M8	35.4	97.0
2x36	T8	G13	2 x 32.0	ELXc 236.208	<b>188705</b>	220–240	A2 BAT	–20 to 50	max. 60	M8	69.7	98.0
58	T8	G13	1 x 50.0	ELXc 158.209	<b>188706</b>	220–240	A2 BAT	–20 to 50	max. 60	M8	52.6	106.0
2x58	T8	G13	2 x 50.0	ELXc 258.210	<b>188707</b>	220–240	A2	–20 to 50	max. 65	M8	109.9	105.0

Circuit diagrams see pages 255–259

### Warm start for T8 lamps – Casing: M8

For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

EOL shut down

T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %

18	T8	G13	1 x 16.0	ELXc 136.207	<b>188708</b>	220–240	A2 BAT	–20 to 55	max. 60	M8	18.4	105.0
2x18	T8	G13	2 x 16.0	ELXc 236.208	<b>188709</b>	220–240	A2 BAT	–20 to 50	max. 60	M8	35.2	106.0
36	T8	G13	1 x 32.0	ELXc 136.207	<b>188708</b>	220–240	A2 BAT	–20 to 55	max. 60	M8	35.4	97.0
2x36	T8	G13	2 x 32.0	ELXc 236.208	<b>188709</b>	220–240	A2 BAT	–20 to 50	max. 60	M8	69.7	98.0
58	T8	G13	1 x 50.0	ELXc 158.209	<b>188710</b>	220–240	A2 BAT	–20 to 50	max. 60	M8	52.6	106.0
2x58	T8	G13	2 x 50.0	ELXc 258.210	<b>188711</b>	220–240	A2	–20 to 50	max. 65	M8	109.9	105.0

Circuit diagrams see pages 255–259

## ELXc EffectLine II – Warm start

### Warm start for T8 lamps – Casing: M8

DC voltage

for operation: 176–264 V

(DC voltage can be reduced to 176 V for 2 hours)

for ignition: 198–264 V

IDC terminals: 0.5–1 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC/push-in terminals for leads H05V-U 0.5

EOL 2 shut down

T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
18	T8	G13	1 x 16.0	ELXc 136.216	<b>188868</b>	220–240	A2 BAT	–20 to 55	max. 65	M8	19.8	105.7
2x18	T8	G13	2 x 16.0	ELXc 236.217	<b>188869</b>	220–240	A2 BAT	–20 to 60	max. 70	M8	38.0	101.6
36	T8	G13	1 x 32.0	ELXc 136.216	<b>188868</b>	220–240	A2 BAT	–20 to 55	max. 65	M8	34.4	97.5
2x36	T8	G13	2 x 32.0	ELXc 236.217	<b>188869</b>	220–240	A2 BAT	–20 to 60	max. 70	M8	71.9	110.6
58	T8	G13	1 x 50.0	ELXc 158.218	<b>188870</b>	220–240	A2 BAT	–20 to 60	max. 65	M8	56.0	100.8
2x58	T8	G13	2 x 50.0	ELXc 258.219	<b>188871</b>	220–240	A2	–20 to 55	max. 70	M8	110.0	101.0

Circuit diagrams see pages 255–259

### Warm start for T8 lamps – Casing: M8

DC voltage

for operation: 176–264 V

(DC voltage can be reduced to 176 V for 2 hours)

for ignition: 198–264 V

Push-in terminals with lever opener: 0.5–1.5 mm<sup>2</sup>

EOL 2 shut down

T5    TC    BUILT-IN    1–10 V  
 T8    INDEPENDENT    DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
18	T8	G13	1 x 16.0	ELXc 136.216	<b>188912</b>	220–240	A2 BAT	–20 to 55	max. 65	M8	19.8	105.7
2x18	T8	G13	2 x 16.0	ELXc 136.217	<b>188913</b>	220–240	A2 BAT	–20 to 60	max. 60	M8	38.0	101.6
36	T8	G13	1 x 32.0	ELXc 136.216	<b>188912</b>	220–240	A2 BAT	–20 to 55	max. 65	M8	34.4	97.5
2x36	T8	G13	2 x 32.0	ELXc 236.217	<b>188913</b>	220–240	A2 BAT	–20 to 60	max. 70	M8	71.9	110.6
58	T8	G13	1 x 50.0	ELXc 158.218	<b>188914</b>	220–240	A2 BAT	–20 to 60	max. 65	M8	56.0	100.8
2x58	T8	G13	2 x 50.0	ELXc 258.219	<b>188915</b>	220–240	A2	–20 to 50	max. 70	M8	110.0	101.0

Circuit diagrams see pages 255–259

## ELXc – Warm Start New T5 EffectLine

Electronic built-in ballasts

Casing: metal

DC voltage

for operation: 176–264 V

for ignition: 198–264 V

Push-in terminals with lever opener: 0.5–1 mm<sup>2</sup>

RFI-suppressed

For luminaires of protection class I

Degree of protection: IP20

For lighting systems with


high switching frequency (> 5/day)

Automatic restart after lamp has been changed


Suitable for use in luminaires for emergency

lighting systems acc. to VDE 0108


EOL shut down approved acc. to EN 61347 Test 1

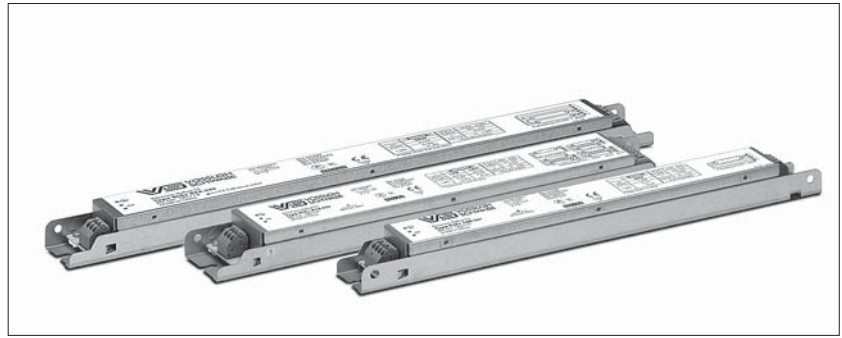

M7.1 / M10.2

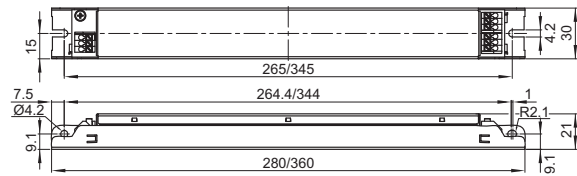

M7.2

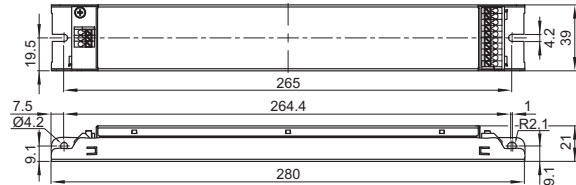


T5     TC     BUILT-IN     1–10 V  
 T8     INDEPENDENT     DALI/PUSH

	Lamp				Electronic ballast										System	
	Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10 %	Energy efficiency	Power factor	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing L mm	W mm	Output W	Luminous factor %	
<b>new</b>	14	T5 HE	G5	1 x 14.0	ELXc 228.229	<b>183111</b>	220–240	EEI=A2	> 0.90	0 to 50	max. 75	M7.1	280	30	16,5	100
<b>new</b>					ELXc 135.231	<b>183113</b>	220–240	EEI=A2	> 0.90	0 to 50	max. 75	M7.1	280	30	16,5	100
<b>new</b>	2x14	T5 HE	G5	2 x 14.0	ELXc 228.229	<b>183111</b>	220–240	EEI=A2	> 0.92	0 to 50	max. 75	M7.1	280	30	31,0	100
<b>new</b>	3x14	T5 HE	G5	3 x 14.0	ELXc 414.227	<b>183109</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.2	280	39	48,0	100
<b>new</b>	4x14	T5 HE	G5	4 x 14.0	ELXc 414.227	<b>183109</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.2	280	39	63,0	100
<b>new</b>	21	T5 HE	G5	1 x 21.0	ELXc 228.229	<b>183111</b>	220–240	EEI=A2	> 0.90	0 to 50	max. 75	M7.1	280	30	24,0	100
<b>new</b>					ELXc 135.231	<b>183113</b>	220–240	EEI=A2	> 0.92	0 to 50	max. 75	M7.1	280	30	24,0	100
<b>new</b>	2x21	T5 HE	G5	2 x 21.0	ELXc 228.229	<b>183111</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.1	280	30	47,5	100
<b>new</b>	24	T5 HO	G5	1 x 24.0	ELXc 239.233	<b>183115</b>	220–240	EEI=A2	> 0.90	0 to 50	max. 75	M7.1	280	30	28,0	100
<b>new</b>	2x24	T5 HO	G5	2 x 24.0	ELXc 239.233	<b>183115</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.1	280	30	53,5	100
<b>new</b>	3x24	T5 HO	G5	3 x 24.0	ELXc 424.228	<b>183110</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.2	280	39	76,0	100
<b>new</b>	4x24	T5 HO	G5	4 x 24.0	ELXc 424.228	<b>183110</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.2	280	39	100,0	100
<b>new</b>	28	T5 HE	G5	1 x 28.0	ELXc 228.229	<b>183111</b>	220–240	EEI=A2	> 0.92	0 to 50	max. 75	M7.1	280	30	31,0	100
<b>new</b>					ELXc 135.231	<b>183113</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.1	280	30	32,0	100
<b>new</b>	2x28	T5 HE	G5	2 x 28.0	ELXc 228.229	<b>183111</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.1	280	30	61,0	100
<b>new</b>					ELXc 328.230	<b>183112</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.2	280	39	61,0	100
<b>new</b>	3x28	T5 HE	G5	3 x 28.0	ELXc 328.230	<b>183112</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.2	280	39	94,0	100
<b>new</b>	35	T5 HE	G5	1 x 35.0	ELXc 135.231	<b>183113</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.1	280	30	38,0	100
<b>new</b>	2x35	T5 HE	G5	2 x 35.0	ELXc 235.232	<b>183114</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M10.2	360	30	74,0	100
<b>new</b>	39	T5 HO	G5	1 x 39.0	ELXc 239.233	<b>183115</b>	220–240	EEI=A2	> 0.92	0 to 50	max. 75	M7.1	280	30	43,5	100
<b>new</b>	2x39	T5 HO	G5	2 x 39.0	ELXc 239.233	<b>183115</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.1	280	30	83,0	100
<b>new</b>	49	T5 HO	G5	1 x 49.0	ELXc 149.234	<b>183116</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.1	280	30	51,0	100
<b>new</b>	2x49	T5 HO	G5	2 x 49.0	ELXc 249.235	<b>183117</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M10.2	360	30	108,0	100
<b>new</b>	54	T5 HO	G5	1 x 54.0	ELXc 254.236	<b>183118</b>	220–240	EEI=A2	> 0.92	0 to 50	max. 75	M7.1	280	30	58,0	100
<b>new</b>	2x54	T5 HO	G5	2 x 54.0	ELXc 254.236	<b>183118</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.1	280	30	113,0	100
<b>new</b>	80	T5 HO	G5	1 x 80.0	ELXc 180.237	<b>183119</b>	220–240	EEI=A2	> 0.95	0 to 50	max. 75	M7.1	280	30	86,0	100


Preliminary data

## ELXc – ECO EffectLine Warm Start for T5 and T8 Lamps


Electronic built-in ballasts  
 Casing: PC, white  
 DC voltage: 198-264 V  
 Push-in terminals with lever opener: 0.5-1.5 mm<sup>2</sup>  
 RFI-suppressed  
 For luminaires of protection class I  
 Degree of protection: IP20  
 For lighting systems with  
 high switching frequency (> 5/day)  
 EOL shut down approved acc. to EN 61347 Test 1  
 (for T5 lamps); EOL shut down (for T8 lamps)

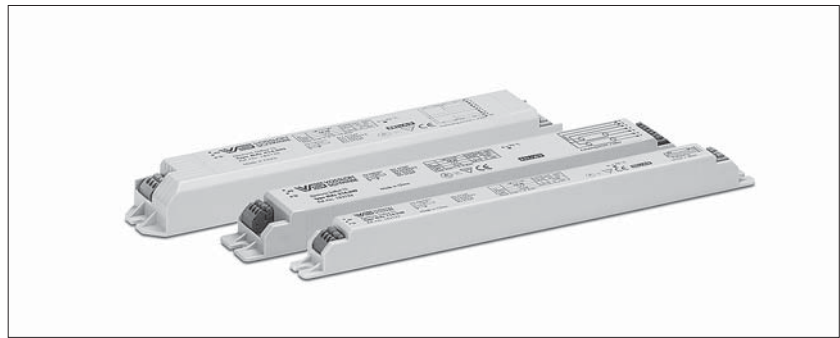

**K7.1 / K7.2**

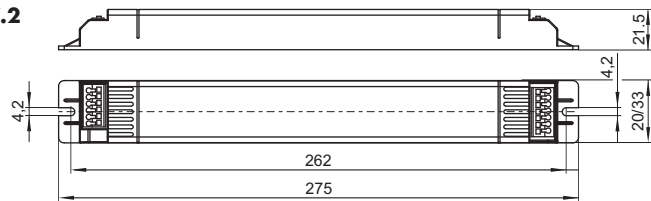

**K5.1 / K5.2**

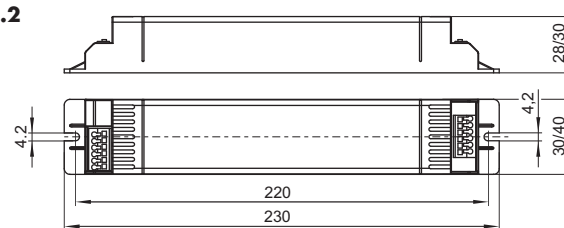

- T5     TC     BUILT-IN     1-10 V
- T8     INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast										System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10 %	Energy efficiency	Power factor	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	W mm	H mm	Output W	Luminous factor %

**For T5 lamps**

<b>new</b>	14	T5 HE	G5	1 x 14.8	ELXc 114.238	<b>183122</b>	220-240	A2	> 0.95	0 to 50	max. 75	K7.1	20	21.5	17.0	100
<b>new</b>	2x14	T5 HE	G5	2 x 14.5	ELXc 214.240	<b>183124</b>	220-240	A2	> 0.95	0 to 50	max. 75	K7.2	33	21.5	33.0	100
<b>new</b>	4x14	T5 HE	G5	4 x 14.0	ELXc 414.242	<b>183126</b>	220-240	A2	> 0.95	0 to 50	max. 75	K5.2	40	30	64.0	100
<b>new</b>	28	T5 HE	G5	1 x 28.5	ELXc 128.239	<b>183123</b>	220-240	A2	> 0.95	0 to 50	max. 75	K7.1	20	21.5	31.5	100
<b>new</b>	2x28	T5 HE	G5	2 x 26.5	ELXc 228.241	<b>183125</b>	220-240	A2	> 0.95	0 to 50	max. 75	K7.2	33	21.5	59.0	95

**For T8 lamps**

<b>new</b>	18	T8	G13	1 x 15.5	ELXc 118.243	<b>183127</b>	220-240	A2	> 0.95	-15 to 50	max. 70	K5.1	30	28	18.5	98
<b>new</b>	2x18	T8	G13	2 x 15.5	ELXc 218.246	<b>183130</b>	220-240	A2	> 0.96	-15 to 50	max. 70	K5.1	30	28	35.0	98
<b>new</b>	4x18	T8	G13	4 x 15.5	ELXc 418.249	<b>183133</b>	220-240	A2	> 0.98	-15 to 50	max. 70	K5.2	40	30	69.0	97
<b>new</b>	36	T8	G13	1 x 30.5	ELXc 136.244	<b>183128</b>	220-240	A2	> 0.96	-15 to 50	max. 70	K5.1	30	28	34.0	95
<b>new</b>	2x36	T8	G13	2 x 31.0	ELXc 236.247	<b>183131</b>	220-240	A2	> 0.98	-15 to 50	max. 70	K5.2	40	30	68.0	97
<b>new</b>	58	T8	G13	1 x 48.0	ELXc 158.245	<b>183129</b>	220-240	A2	> 0.96	-15 to 50	max. 70	K5.1	30	28	53.5	96
<b>new</b>	2x58	T8	G13	2 x 49.5	ELXc 258.248	<b>183132</b>	220-240	A2	> 0.98	-15 to 50	max. 80	K5.2	40	30	107.0	100

Preliminary data

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

## ELXd – Dimmable for T5 and T8 Lamps

Electronic built-in ballasts

Casing: metal

Power factor:  $\geq 0.95$  at 100% operation

DC voltage

for operation: 154-276 V (M22, M23, M24)

for operation: 176-264 V (M9)

for ignition: 198-264 V

For the automatic luminaire wiring:

IDC terminals for leads HO5V-U 0.5

RFI-suppressed

For luminaires of protection class I

Degree of protection: IP20


For lighting systems with

high switching frequency ( $> 5/\text{day}$ )


Suitable for use in luminaires for emergency

lighting systems acc. to VDE 0108


**M9**

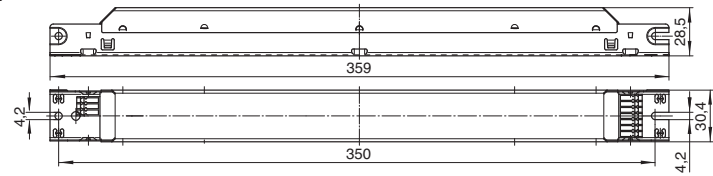


**M10/M11**

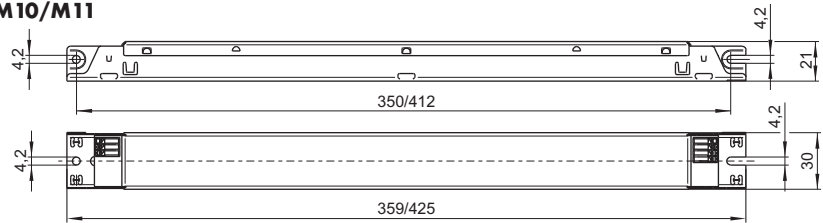

**M23**

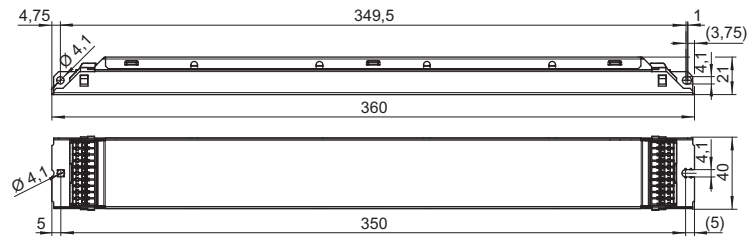

**M22/M24**

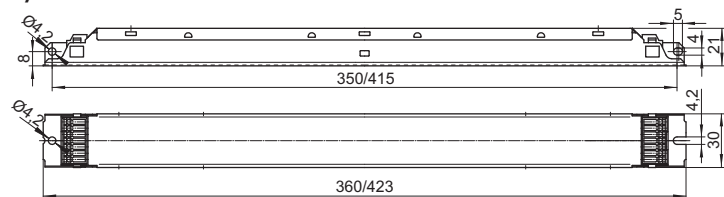



## ELXd – Dimmable 1–10 V with lamp detection

**Dimming range:**

**approx. 1–100% of lamp power**

Control voltage: DC 1–10 V acc. to EN 60929  
with earth leakage current 0.5 mA  
(protected if connected to mains voltage)

For use with open- or closed-loop control units

Push-in terminals: 0.5–1 mm<sup>2</sup>

EOL shut down approved

acc. to EN 61347 Test 2 (for T5)

EOL 2 shut down (for T8)

T5     TC     BUILT-IN     1–10 V  
 T8     INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %

**T5 lamps** – Casing: M10, M22, M23 and M24

new

new

new

14	T5	G5	1 x 14.0	ELXd 135.823	<b>188717</b>	220–240	A1 BAT	10 to 55	max. 65	M10	17.0	99.5
				ELXd 124.607	<b>188336</b>	220–240	A1 BAT	10 to 50	max. 75	M22	16.0	100.0
2x14	T5	G5	2 x 13.6	ELXd 235.735	<b>183059</b>	220–240	A1 BAT	10 to 50	max. 70	M11	33.4	98.7
			2 x 14.0	ELXd 224.608	<b>188337</b>	220–240	A1 BAT	10 to 50	max. 75	M24	31.0	100.0
3x14	T5	G5	3 x 14.0	ELXd 324.623	<b>188597</b>	220–240	A1 BAT	10 to 50	max. 75	M23	45.3	100.0
4x14	T5	G5	4 x 14.0	ELXd 424.624	<b>188598</b>	220–240	A1 BAT	10 to 50	max. 75	M23	60.4	100.0
21	T5	G5	1 x 21.0	ELXd 135.823	<b>188717</b>	220–240	A1 BAT	10 to 55	max. 65	M10	24.0	99.0
				ELXd 139.609	<b>188338</b>	220–240	A1 BAT	10 to 50	max. 75	M22	23.0	100.0
2x21	T5	G5	2 x 20.5	ELXd 235.735	<b>183059</b>	220–240	A1 BAT	10 to 50	max. 70	M11	47.0	95.1
			2 x 21.0	ELXd 239.610	<b>188339</b>	220–240	A1 BAT	10 to 50	max. 75	M24	45.0	100.0
24	T5	G5	1 x 23.0	ELXd 124.607	<b>188336</b>	220–240	A1 BAT	10 to 50	max. 75	M22	26.0	100.0
2x24	T5	G5	2 x 23.0	ELXd 224.608	<b>188337</b>	220–240	A1 BAT	10 to 50	max. 75	M24	50.0	100.0
3x24	T5	G5	3 x 23.0	ELXd 324.623	<b>188597</b>	220–240	A1 BAT	10 to 50	max. 75	M23	73.4	100.0
4x24	T5	G5	4 x 23.0	ELXd 424.624	<b>188598</b>	220–240	A1 BAT	10 to 50	max. 75	M23	97.6	100.0
28	T5	G5	1 x 28.0	ELXd 135.823	<b>188717</b>	220–240	A1 BAT	10 to 55	max. 65	M10	32.0	98.6
				ELXd 154.611	<b>188340</b>	220–240	A1 BAT	10 to 50	max. 75	M22	31.0	100.0
2x28	T5	G5	2 x 27.3	ELXd 235.735	<b>183059</b>	220–240	A1 BAT	10 to 50	max. 70	M11	62.1	97.6
			2 x 28.0	ELXd 254.612	<b>188341</b>	220–240	A1 BAT	10 to 50	max. 75	M24	61.0	100.0
35	T5	G5	1 x 35.0	ELXd 135.823	<b>188717</b>	220–240	A1 BAT	10 to 55	max. 65	M10	38.0	95.0
				ELXd 180.613	<b>188342</b>	220–240	A1 BAT	10 to 50	max. 75	M22	38.0	100.0
2x35	T5	G5	2 x 33.9	ELXd 235.735	<b>183059</b>	220–240	A1 BAT	10 to 50	max. 70	M11	76.9	96.7
			2 x 35.0	ELXd 249.614	<b>188343</b>	220–240	A1 BAT	10 to 50	max. 75	M24	75.0	100.0
				ELXd 280.630	<b>188604</b>	220–240	A1 BAT	10 to 50	max. 75	M24	75.0	100.0
39	T5	G5	1 x 38.0	ELXd 139.609	<b>188338</b>	220–240	A1 BAT	10 to 50	max. 75	M22	42.0	100.0
2x39	T5	G5	2 x 38.0	ELXd 239.610	<b>188339</b>	220–240	A1 BAT	10 to 50	max. 75	M24	82.0	100.0
49	T5	G5	1 x 49.0	ELXd 180.613	<b>188342</b>	220–240	A1 BAT	10 to 50	max. 75	M22	54.0	100.0
2x49	T5	G5	2 x 49.0	ELXd 249.614	<b>188343</b>	220–240	A1 BAT	10 to 50	max. 75	M24	104.0	100.0
				ELXd 280.630	<b>188604</b>	220–240	A1 BAT	10 to 50	max. 75	M24	104.0	100.0
54	T5	G5	1 x 54.0	ELXd 154.611	<b>188340</b>	220–240	A1 BAT	10 to 50	max. 75	M22	59.0	100.0
2x54	T5	G5	2 x 54.0	ELXd 254.612	<b>188341</b>	220–240	A1 BAT	10 to 50	max. 75	M24	115.0	100.0
80	T5	G5	1 x 80.0	ELXd 180.613	<b>188342</b>	220–240	A1 BAT	10 to 50	max. 75	M22	88.0	100.0
2x80	T5	G5	2 x 80.0	ELXd 280.630	<b>188604</b>	220–240	A1 BAT	10 to 50	max. 75	M24	165.0	100.0

**T8 lamps** – Casing: M9 and M23

18	T8	G13	1 x 16.0	ELXd 118.718	<b>188873</b>	220–240	EEL=A1	10 to 50	max. 70	M9	21.0	102.1
2x18	T8	G13	2 x 16.0	ELXd 218.719	<b>188874</b>	220–240	EEL=A1	10 to 50	max. 70	M9	41.5	104.6
3x18	T8	G13	3 x 16.0	ELXd 318.622	<b>188596</b>	220–240	A1 BAT	-20 to 50	max. 75	M23	53.6	100.0
4x18	T8	G13	4 x 16.0	ELXd 418.625	<b>188599</b>	220–240	A1 BAT	-20 to 50	max. 75	M23	69.3	100.0
36	T8	G13	1 x 32.0	ELXd 136.720	<b>188875</b>	220–240	A1 BAT	10 to 50	max. 70	M9	37.3	101.6
2x36	T8	G13	2 x 32.0	ELXd 236.721	<b>188876</b>	220–240	EEL=A1	10 to 50	max. 70	M9	72.0	98.9
58	T8	G13	1 x 50.0	ELXd 158.722	<b>188877</b>	220–240	A1 BAT	10 to 50	max. 70	M9	55.0	101.3
2x58	T8	G13	2 x 50.0	ELXd 258.723	<b>188878</b>	220–240	EEL=A1	10 to 50	max. 75	M9	109.0	96.5

Circuit diagrams see pages 255–259



## ELXd – Dimmable with push key or DALI with lamp detection

**Dimming range:**

**approx. 1–100% of lamp power**

PUSH: dimmable with usual push key

DALI: poles are not polarity sensitive  
(protected if connected to mains voltage)  
for use with DALI compatible control units

Push-in terminals: 0,5-1 mm<sup>2</sup>

EOL shut down approved

acc. to EN 61347 Test 2 (for T5)

EOL 2 shut down (for T8)

standby power consumption: ≤ 0.2 W

Complete implementation of the DALI-standard:  
addressable, memory store for scenes and groups,  
revertive information communication, physical and  
RND-selection, standardized lamp characteristic  
Low-power design ensures very low standby  
power consumption  
Compatible with IEC 62386

T5     TC     BUILT-IN     1-10 V  
 T8     INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
<b>For T5 lamps - Casing: M10, M11, M22, M23 and M24</b>												
<b>new</b> 14	T5	G5	1 x 13.7	ELXd 135.724	<b>188932</b>	220-240	A1 BAT	10 to 50	max. 65	M10	16.4	102.6
			1 x 14.0	ELXd 124.600	<b>188329</b>	220-240	A1 BAT	10 to 50	max. 75	M22	16.0	100.0
<b>new</b> 2x14	T5	G5	2 x 13.6	ELXd 235.725	<b>188933</b>	220-240	A1 BAT	10 to 50	max. 70	M11	33.4	96.7
			2 x 14.0	ELXd 224.601	<b>188330</b>	220-240	A1 BAT	10 to 50	max. 75	M24	31.0	100.0
3x14	T5	G5	3 x 14.0	ELXd 324.626	<b>188600</b>	220-240	A1 BAT	10 to 50	max. 75	M23	45.3	100.0
4x14	T5	G5	4 x 14.0	ELXd 424.628	<b>188602</b>	220-240	A1 BAT	10 to 50	max. 75	M23	60.4	100.0
<b>new</b> 21	T5	G5	1 x 20.7	ELXd 135.724	<b>188932</b>	220-240	A1 BAT	10 to 50	max. 65	M10	24.3	102.7
			1 x 21.0	ELXd 139.602	<b>188331</b>	220-240	A1 BAT	10 to 50	max. 75	M22	23.0	100.0
<b>new</b> 2x21	T5	G5	2 x 20.5	ELXd 235.725	<b>188933</b>	220-240	A1 BAT	10 to 50	max. 70	M11	47.0	97.6
			2 x 21.0	ELXd 239.621	<b>188350</b>	220-240	A1 BAT	10 to 50	max. 75	M24	45.0	100.0
24	T5	G5	1 x 23.0	ELXd 124.600	<b>188329</b>	220-240	A1 BAT	10 to 50	max. 75	M22	26.0	100.0
2x24	T5	G5	2 x 23.0	ELXd 224.601	<b>188330</b>	220-240	A1 BAT	10 to 50	max. 75	M24	50.0	100.0
3x24	T5	G5	3 x 23.0	ELXd 324.626	<b>188600</b>	220-240	A1 BAT	10 to 50	max. 75	M23	73.4	100.0
4x24	T5	G5	4 x 23.0	ELXd 424.628	<b>188602</b>	220-240	A1 BAT	10 to 50	max. 75	M23	97.6	100.0
<b>new</b> 28	T5	G5	1 x 27.8	ELXd 135.724	<b>188932</b>	220-240	A1 BAT	10 to 50	max. 65	M10	32.0	104.1
			1 x 28.0	ELXd 154.603	<b>188332</b>	220-240	A1 BAT	10 to 50	max. 75	M22	31.0	100.0
<b>new</b> 2x28	T5	G5	2 x 27.3	ELXd 235.725	<b>188933</b>	220-240	A1 BAT	10 to 50	max. 70	M11	62.1	95.1
			2 x 28.0	ELXd 254.604	<b>188333</b>	220-240	A1 BAT	10 to 50	max. 75	M24	61.0	100.0
<b>new</b> 35	T5	G5	1 x 34.7	ELXd 135.724	<b>188932</b>	220-240	A1 BAT	10 to 50	max. 65	M10	40.0	107.5
			1 x 35.0	ELXd 180.605	<b>188334</b>	220-240	A1 BAT	10 to 50	max. 75	M22	38.0	100.0
<b>new</b> 2x35	T5	G5	2 x 33.9	ELXd 235.725	<b>188933</b>	220-240	A1 BAT	10 to 50	max. 70	M11	76.9	98.7
			2 x 35.0	ELXd 280.631	<b>188605</b>	220-240	A1 BAT	10 to 50	max. 75	M24	74.0	100.0
				ELXd 249.606	<b>188335</b>	220-240	A1 BAT	10 to 50	max. 75	M24	75.0	100.0
39	T5	G5	1 x 38.0	ELXd 139.602	<b>188331</b>	220-240	A1 BAT	10 to 50	max. 75	M22	42.0	100.0
2x39	T5	G5	2 x 38.0	ELXd 239.621	<b>188350</b>	220-240	A1 BAT	10 to 50	max. 75	M24	82.0	100.0
49	T5	G5	1 x 49.0	ELXd 180.605	<b>188334</b>	220-240	A1 BAT	10 to 50	max. 75	M22	54.0	100.0
<b>new</b> 2x49	T5	G5	2 x 49.0	ELXd 280.631	<b>188605</b>	220-240	A1 BAT	10 to 50	max. 75	M24	101.0	100.0
				ELXd 249.606	<b>188335</b>	220-240	A1 BAT	10 to 50	max. 75	M24	104.0	100.0
54	T5	G5	1 x 54.0	ELXd 154.603	<b>188332</b>	220-240	A1 BAT	10 to 50	max. 75	M22	59.0	100.0
2x54	T5	G5	2 x 54.0	ELXd 254.604	<b>188333</b>	220-240	A1 BAT	10 to 50	max. 75	M24	115.0	100.0
80	T5	G5	1 x 80.0	ELXd 180.605	<b>188334</b>	220-240	A1 BAT	10 to 50	max. 75	M22	88.0	100.0
2x80	T5	G5	2 x 80.0	ELXd 280.631	<b>188605</b>	220-240	A1 BAT	10 to 50	max. 75	M24	165.0	100.0


Circuit diagrams see pages 255-259

## ELXd – Dimmable with push key or DALI with lamp detection

T5     TC     BUILT-IN     1-10 V  
 T8     INDEPENDENT     DALI/PUSH

Lamp				Electronic ballast							System	
Output W	Type	Base	Power consumption W	Type	Ref. No.	Voltage AC 50, 60 Hz V±10%	Energy efficiency	Ambient temperature t <sub>a</sub> (°C)	Casing temperature t <sub>c</sub> (°C)	Casing	Output W	Luminous factor %
<b>For T8 lamps</b> - Casing: M22, M23 and M24												
18	T8	G13	1 x 16.0	ELXd 118.615	<b>188344</b>	220-240	A1 BAT	-20 to 50	max. 75	M22	19.0	100.0
2x18	T8	G13	2 x 16.0	ELXd 218.616	<b>188345</b>	220-240	A1 BAT	-20 to 50	max. 75	M24	37.0	100.0
3x18	T8	G13	3 x 16.0	ELXd 318.627	<b>188601</b>	220-240	A1 BAT	-20 to 50	max. 75	M23	53.6	100.0
4x18	T8	G13	4 x 16.0	ELXd 418.629	<b>188603</b>	220-240	A1 BAT	-20 to 50	max. 75	M23	69.3	100.0
36	T8	G13	1 x 32.0	ELXd 136.617	<b>188346</b>	220-240	A1 BAT	-20 to 50	max. 75	M22	36.0	100.0
2x36	T8	G13	2 x 32.0	ELXd 236.618	<b>188347</b>	220-240	A1 BAT	-20 to 50	max. 75	M24	69.0	100.0
58	T8	G13	1 x 50.0	ELXd 158.619	<b>188348</b>	220-240	A1 BAT	-20 to 50	max. 75	M22	56.0	100.0
2x58	T8	G13	2 x 50.0	ELXd 258.620	<b>188349</b>	220-240	A1 BAT	-20 to 50	max. 75	M24	108.0	100.0

Circuit diagrams see pages 255-259



## Accessories for Dimmable Electronic Ballasts

### Manual controller

Dimmer for EB with low-voltage interface 1 - 10 V

Dimensions: 67x67x51 mm

Push-button change-over switch with stud 4 mm for installation in flush type boxes with  $\varnothing$  55 mm

Max. 50 EBs per dimmer

Weight: 60/30 g, unit: 25 pcs.



Without cover plate

**Ref. No.: 172778**

Cover plate with rotary knob

Dimensions: 80x80x9 mm

**Ref. No.: 172775** white

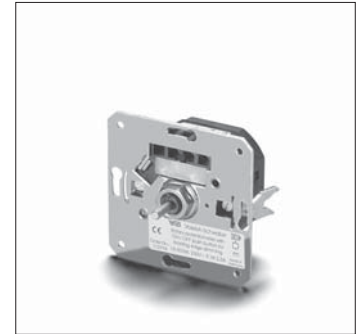

### Light sensor

Constant light control with clamp fastening for fluorescent lamps T8 (T26) and compact fluorescent lamps

Dimensions: 33.5x40x96 mm



With connection lead: 2x0.24 mm<sup>2</sup>

Length: 800 mm

Max. 50 EBs per light sensor

Weight: 55 g, unit: 60 pcs.

**Ref. No.: 172776**

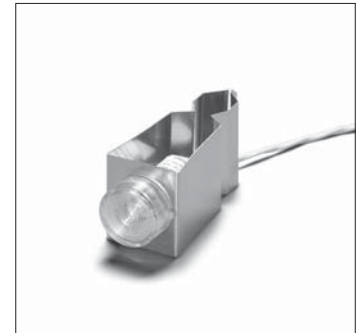

### Multi sensor

Dimensions: 58.5x70.5x42 mm


With the sensor the lighting can be kept on a pre-defined level

With integrated motion detector

Max. 50 EBs per multi sensor

Weight: 125 g, unit: 25 pcs.

**Ref. No.: 172777**

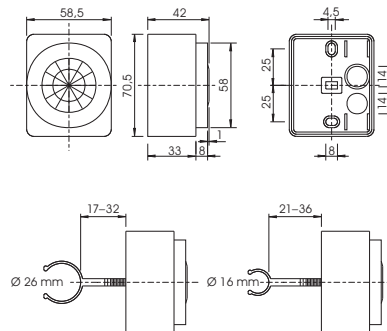

1

2

**3**

4

5

6


7

8

9

10

RELIABLE AND  
DURABLE

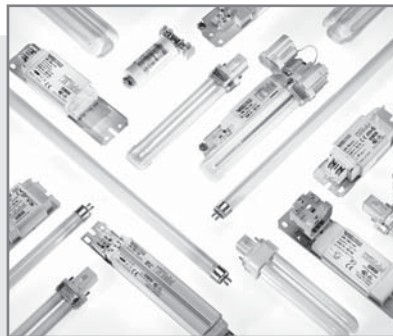

## ELECTROMAGNETIC BALLASTS

The following chapter presents Vossloh-Schwabe's broad range of electromagnetic ballasts for compact fluorescent lamps and tubular fluorescent lamps. The variety of available performance properties and shapes satisfies the most diverse design requirements.

Vossloh-Schwabe's electromagnetic ballasts are characterized by extremely tight impedance-value tolerances, which are achieved by individual adjustment of the air gap during the automated production and testing process of the ballasts. This optimises both light output as well as the service life of fluorescent lamps.

# 3

## Electromagnetic Ballasts for TC and T Lamps

### **Electromagnetic ballasts for compact fluorescent lamps**

Standard ballasts  
Ballasts 120 V, 60 Hz

**168-172**

168-171  
172

### **Electromagnetic ballasts for tubular fluorescent lamps**

Standard ballasts  
Ballasts 120 V, 60 Hz

**173-176**

173-175  
176

### **Technical details for fluorescent lamps**

General technical details  
Glossary

**243-271**

394-401  
402-404

1

2

3

4

5

6

7

8

9

10

## Standard Ballasts 5–16 W, 230/240/220 V

For compact fluorescent lamps

Shape: 28 x 41 mm

Vacuum-impregnated with polyester resin



Push-in terminal for leads: 0.5–1 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads HO5V-U 0.5

tw 130

Protection class I





Lamp				Ballast										Capacitor	
Output	Type	Base	Current	Type	Ref. No.	Voltage	a	b	c	Weight	$\Delta t/\Delta t_{on}$	Energy efficiency*	C <sub>p</sub>	Current	
W			mA			V, Hz	mm	mm	mm	kg	K		$\mu\text{F}$	mA	
<b>230 V, 50 Hz</b>															
5	TC-S	G23	180	L7/9/11.307	<b>163694</b>	230, 50	85	75	34	0.32	60/85	B2	2.0	50	
2x5	TC-S	G23	180	LN 13.805	<b>169647</b>	230, 50	85	75	34	0.32	50/85	B1	2.0	70	
				LN 13.313	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B2	2.0	70	
7	TC-S	G23	175	L7/9/11.307	<b>163694</b>	230, 50	85	75	34	0.32	60/85	B2	2.0	50	
2x7	TC-S	G23	160	LN 13.805	<b>169647</b>	230, 50	85	75	34	0.32	50/85	B1	2.0	70	
				LN 13.313	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B2	2.0	70	
9	TC-S	G23	170	L7/9/11.307	<b>163694</b>	230, 50	85	75	34	0.32	60/85	B1	2.0	60	
2x9	TC-S	G23	140	LN 13.805	<b>169647</b>	230, 50	85	75	34	0.32	50/85	B1	2.0	70	
				LN 13.313	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B2	2.0	80	
10	TC-D	G24d-1	190	LN 13.805	<b>169647</b>	230, 50	85	75	34	0.32	50/85	B1	2.0	70	
				LN 13.313	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B2	2.0	70	
	TC-DD	GR10q	180	LN 13.805	<b>169647</b>	230, 50	85	75	34	0.32	50/85	B1	2.0	70	
				LN 13.313	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B2	2.0	70	
11	TC-S	G23	155	L7/9/11.307	<b>163694</b>	230, 50	85	75	34	0.32	60/85	B1	2.0	80	
13	TC-D/TC-T	G24d-1/GX24d-1	175	LN 13.805	<b>169647</b>	230, 50	85	75	34	0.32	50/85	B1	2.0	80	
				LN 13.313	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B2	2.0	80	
16	TC-DD	GR8/GR10q	195	LN 16.316	<b>163730</b>	230, 50	85	75	34	0.32	60/125	B1	2.0	100	
<b>240 V, 50 Hz</b>															
5	TC-S	G23	180	L7/9/11.411	<b>164335</b>	240, 50	85	75	34	0.32	60/85	B2	2.0	50	
2x5	TC-S	G23	180	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B2	2.0	70	
7	TC-S	G23	175	L7/9/11.411	<b>164335</b>	240, 50	85	75	34	0.32	60/85	B2	2.0	50	
2x7	TC-S	G23	160	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B2	2.0	70	
9	TC-S	G23	170	L7/9/11.411	<b>164335</b>	240, 50	85	75	34	0.32	60/85	B1	2.0	60	
2x9	TC-S	G23	140	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B2	2.0	80	
				LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B2	2.0	80	
10	TC-D	G24d-1	190	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B2	2.0	70	
				GR10q	180	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B2	2.0
11	TC-S	G23	155	L7/9/11.411	<b>164335</b>	240, 50	85	75	34	0.32	60/85	B1	2.0	80	
13	TC-D/TC-T	G24d-1/GX24d-1	175	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B1	2.0	80	
16	TC-DD	GR8/GR10q	195	LN 16.417	<b>164358</b>	240, 50	85	75	34	0.32	60/130	B1	2.0	100	
<b>220 V, 60 Hz</b>															
5	TC-S	G23	180	L7/9/11.207	<b>163305</b>	220, 60	85	75	34	0.32	35/65	–	2.0	70	
2x5	TC-S	G23	180	L 13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	–	2.0	90	
7	TC-S	G23	175	L7/9/11.207	<b>163305</b>	220, 60	85	75	34	0.32	35/65	–	2.0	70	
2x7	TC-S	G23	160	L 13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	–	2.0	90	
9	TC-S	G23	170	L7/9/11.207	<b>163305</b>	220, 60	85	75	34	0.32	35/65	–	2.0	70	
2x9	TC-S	G23	140	L 13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	–	2.0	90	
				L 13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	–	2.0	90	
10	TC-D	G24d-1	190	L 13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	–	2.0	80	
				GR10q	180	L 13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	–	2.0
11	TC-S	G23	155	L7/9/11.207	<b>163305</b>	220, 60	85	75	34	0.32	35/65	–	2.0	80	
13	TC-D/TC-T	G24d-1/GX24d-1	165	L 13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	–	2.0	110	

\* Energy efficiency: EEI=B2 and EEI=B1, valid until 2017

## Standard Ballasts 18–58 W, 230 V

For compact fluorescent lamps  
Shape: 28 x 41 mm

Vacuum-impregnated with polyester resin  
Push-in terminal for leads: 0.5–1 mm<sup>2</sup>  
For the automatic luminaire wiring:  
IDC terminals for leads H05V-U 0.5  
tw 130  
Protection class I

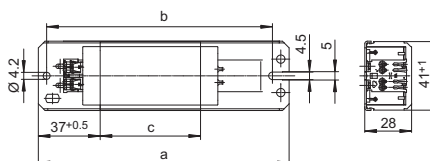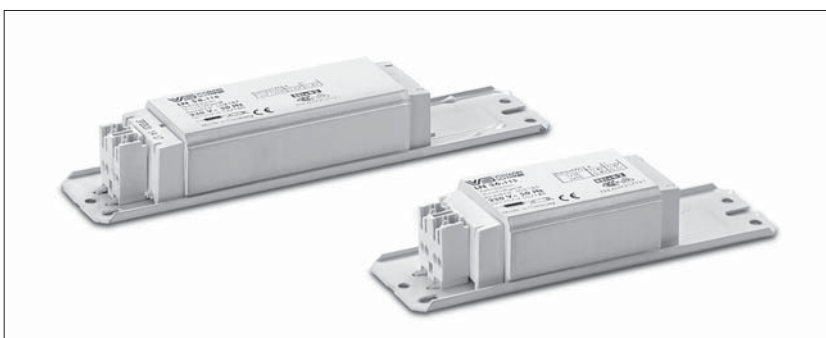

Lamp				Ballast									Capacitor	
Output W	Type	Base	Current mA	Type	Ref. No.	Voltage V, Hz	a mm	b mm	c mm	Weight kg	$\Delta t/\Delta t_{an}$ K	Energy efficiency*	C <sub>p</sub> μF	Current mA
<b>230 V, 50 Hz</b>														
18	TC-D/TC-T	G24d-2/GX24d-2	220	LN 181.940	<b>508922</b>	230, 50	85	75	34	0.32	50/120	B1	2.0	110
				LN 181.319	<b>163763</b>	230, 50	85	75	34	0.32	60/140	B1	2.0	110
	TC-F/TC-L	2G10/2G11	370	LN 18.510	<b>164572</b>	230, 50	155	140	92	0.80	40/65	B1	4.5	120
				LN 18.131	<b>530941</b>	230, 50	150	140	60	0.55	55/95	B2	4.5	120
	T-U	2G13	370	L 18.934**	<b>534621</b>	230, 50	150	140	45	0.43	70/150	–	4.5	120
				LN 18.131	<b>530941</b>	230, 50	150	140	60	0.55	55/95	B2	4.5	120
2x18	TC-F/TC-L	2G10/2G11	400	LN 2x18.135	<b>532155</b>	230, 50	150	140	45	0.43	65	B1	4.0	210
				L 36.334	<b>530007</b>	230, 50	150	140	60	0.55	60/155	B1	4.0	210
22	T-R	G10q	400	LN 30.530	<b>164680</b>	230, 50	155	140	92	0.80	45/65	B2	4.5	200
24	TC-F/TC-L	2G10/2G11	345	LN 24/26.804	<b>534490</b>	230, 50	150	140	60	0.55	55/110	B2	4.5	150
				L 18.934**	<b>534621</b>	230, 50	150	140	45	0.43	70/150	–	4.5	150
26	TC-D/TC-T	G24d-3/GX24d-3	325	LN 18.131	<b>530941</b>	230, 50	150	140	60	0.55	55/95	B1	3.5	140
				LN 26.813	<b>509502</b>	230, 50	110	100	45	0.41	55/145	B2	3.5	140
				L 18.934**	<b>534621</b>	230, 50	150	140	45	0.43	70/150	–	3.5	140
28	TC-DD	GR8/GR10q	320	LN 18.510	<b>164572</b>	230, 50	155	140	92	0.80	40/65	B1	3.5	150
				LN 18.131	<b>530941</b>	230, 50	150	140	60	0.55	55/95	B1	3.5	150
				L 18.934**	<b>534621</b>	230, 50	150	140	45	0.43	70/150	–	3.5	150
<b>new</b> 32	T-R	G10q	450	LN 36.570	<b>169779</b>	230, 50	155	140	92	0.80	35/90	B2	4.0	220
36	TC-F/TC-L	2G10/2G11	430	LN 36.570	<b>169779</b>	230, 50	155	140	92	0.80	35/90	B1	4.5	210
				LN 36.511	<b>164590</b>	230, 50	155	140	92	0.80	35/95	B1	4.5	210
				LN 36.130	<b>527191</b>	230, 50	150	140	60	0.55	50/140	B2	4.5	210
				LN 36.149	<b>529029</b>	230, 50	150	140	60	0.55	55/150	B2	4.5	210
				L 36.132**	<b>535977</b>	230, 50	150	140	45	0.43	65	–	4.5	210
36/40	T-U/TR	2G13/G10q	430	LN 36.570	<b>169779</b>	230, 50	150	140	92	0.80	35/90	B1	4.5	210
				LN 36.149	<b>529029</b>	230, 50	150	140	60	0.55	55/150	B2	4.5	210
				L 36.132**	<b>535977</b>	230, 50	150	140	45	0.43	65	–	4.5	210
38	TC-DD	GR10q	430	LN 36.570	<b>169779</b>	230, 50	155	140	92	0.80	35/90	B1	4.5	210
				LN 36.149	<b>529029</b>	230, 50	150	140	60	0.55	55/150	B2	4.5	210
				L 36.132**	<b>535977</b>	230, 50	150	140	45	0.43	65	–	4.5	210
<b>new</b> 58	T-U	2G13	670	LN 58.568	<b>169389</b>	230, 50	233	220	160	1.31	35/95	B1	7.0	320
				LN 58.990	<b>509349</b>	230, 50	190	180	110	0.95	50/130	B2	7.0	320
				LN 58.116	<b>508186</b>	230, 50	190	180	92	0.80	55/160	B2	7.0	320
				L 58.718**	<b>169658</b>	230, 50	190	180	92	0.80	60/170	–	7.0	320

\* Energy efficiency: EEI=B2 and EEI=B1, valid until 2017

\*\* Ballasts without CE mark for markets outside of the EU



## Standard Ballasts

### 18–58 W, 240 V

For compact fluorescent lamps  
Shape: 28 x 41 mm

Lamp				Ballast									Capacitor	
Output	Type	Base	Current	Type	Ref. No.	Voltage	a	b	c	Weight	$\Delta t/\Delta t_{on}$	Energy efficiency*	C <sub>p</sub>	Current
W			mA			V, Hz	mm	mm	mm	kg	K		μF	mA
<b>240 V, 50 Hz</b>														
18	TC-D/TC-T	G24d-2/GX24d-2	220	LN 18.148	<b>164353</b>	240, 50	85	75	34	0.28	60/130	B1	2.0	110
				LN 18.507	<b>164566</b>	240, 50	155	140	92	0.80	35/60	B1	4.5	120
					<b>533043</b>	240, 50	150	140	60	0.55	60/110	B2	4.5	120
	T-U	2G13	370	L 18.936**	<b>534627</b>	240, 50	150	140	45	0.43	70/140	–	4.5	120
				LN 18.507	<b>164566</b>	240, 50	155	140	92	0.80	35/60	B1	4.5	120
				LN 18.162	<b>533043</b>	240, 50	150	140	60	0.55	60/110	B2	4.5	120
2x18	TC-F/TC-L	2G10/2G11	400	LN 2x18.135	<b>535778</b>	240, 50	150	140	45	0.43	65	B1	4.0	210
				L 36/40.443	<b>530008</b>	240, 50	150	140	60	0.55	65/155	B1	4.0	210
				LN 36.201	<b>527196</b>	240, 50	150	140	60	0.55	55/140	B1	4.0	210
				LN 36.505	<b>164555</b>	240, 50	155	140	92	0.80	40/95	B1	4.0	210
21	TC-DD	GR10q	260	LN 21.293	<b>547145</b>	240, 50	105	95	45	0.41	55	B1	3.0	120
24	TC-F/TC-L	2G10/2G11	345	LN 18.507	<b>164566</b>	240, 50	155	140	92	0.80	35/60	B1	4.5	150
				LN 18.162	<b>533043</b>	240, 50	150	140	60	0.55	60/110	B2	4.5	150
				L 18.936**	<b>534627</b>	240, 50	150	140	45	0.43	70/140	–	4.5	150
26	TC-D/TC-T	G24d-3/GX24d-3	325	LN 18.162	<b>533043</b>	240, 50	150	140	60	0.55	60/110	B1	4.5	150
				LN 26.238	<b>545405</b>	240, 50	105	95	45	0.41	55/145	B2	3.5	140
28	TC-DD	GR8/GR10q	320	LN 18.162	<b>533043</b>	240, 50	150	140	60	0.55	60/110	B1	3.5	150
				L 18.936**	<b>534627</b>	240, 50	150	140	45	0.43	70/140	–	3.5	150
32	T-R	G10q	450	LN 36.505	<b>164555</b>	240, 50	155	140	92	0.80	40/95	B1	4.0	220
36	TC-F/TC-L	2G10/2G11	430	LN 36.505	<b>164555</b>	240, 50	155	140	92	0.80	40/95	B1	4.5	210
				LN 36.201	<b>527196</b>	240, 50	155	140	60	0.55	55/140	B2	4.5	210
				L 36/40.443**	<b>164438</b>	240, 50	150	140	60	0.55	65/155	–	4.5	210
36/40	T-U/TR	2G13/G10q	430	LN 36.505	<b>164555</b>	240, 50	155	140	92	0.80	40/95	B1	4.5	210
				LN 36.201	<b>527196</b>	240, 50	150	140	60	0.55	55/140	B2	4.5	210
				L 36/40.443**	<b>164438</b>	240, 50	150	140	60	0.55	65/155	–	4.5	210
38	TC-DD	GR10q	430	LN 36.201	<b>527196</b>	240, 50	150	140	60	0.55	55/140	B2	4.5	210
				L 36/40.443**	<b>164438</b>	240, 50	150	140	60	0.55	65/155	–	4.5	210
58	T-U	2G13	670	LN 58.506	<b>164560</b>	240, 50	233	220	160	1.31	35/85	B1	7.0	320
				LN 58.192	<b>507936</b>	240, 50	190	180	110	0.95	50/150	B2	7.0	320
				LN 58.722	<b>534252</b>	240, 50	190	180	92	0.80	60/180	B2	7.0	320

\* Energy efficiency: EEI=B2 and EEI=B1, valid until 2017

\*\* Ballasts without CE mark for markets outside of the EU

## Standard Ballasts 18–58 W, 220 V

For compact fluorescent lamps

Shape: 28 x 41 mm

Lamp				Ballast									Capacitor	
Output	Type	Base	Current	Type	Ref. No.	Voltage	a	b	c	Weight	$\Delta t/\Delta t_{on}$	Energy efficiency*	C <sub>p</sub>	Current
W			mA			V, Hz	mm	mm	mm	kg	K		μF	mA
<b>220 V, 50 Hz</b>														
18	TC-F/TC-L	2G10/2G11	370	L18.933	<b>534624</b>	220,50	150	140	45	0.43	70/160	–	4.5	120
	T-U	2G13	370	L18.933	<b>534624</b>	220,50	150	140	45	0.43	70/160	–	4.5	120
2x18	TC-F/TC-L	2G10/2G11	400	L36.158	<b>530252</b>	220,50	150	140	45	0.43	65	–	4.0	210
24	TC-F/TC-L	2G10/2G11	345	L18.933	<b>534624</b>	220,50	150	140	45	0.43	70/160	–	4.5	150
26	TC-D/TC-T	G24d-3/GX24d-3	325	L18.933	<b>534624</b>	220,50	150	140	45	0.43	70/160	–	3.5	140
28	TC-DD	GR8/GR10q	320	L18.933	<b>534624</b>	220,50	150	140	45	0.43	70/160	–	3.5	150
36	TC-F/TC-L	2G10/2G11	430	L36.158	<b>530252</b>	220,50	150	140	45	0.43	65	–	4.5	210
36/40	T-U/T-R	2G13/G10q	430	L36.158	<b>530252</b>	220,50	150	140	45	0.43	65	–	4.5	210
38	TC-DD	GR10q	430	L36.158	<b>530252</b>	220,50	150	140	45	0.43	65	–	4.5	210
58	T-U	2G13	670	L58.625	<b>164828</b>	220,50	190	180	92	0.80	55/155	–	7.0	320
<b>220 V, 60 Hz</b>														
18	TC-D/TC-T	G24d-2/GX24d-2	220	L18.602	<b>164779</b>	220,60	85	75	34	0.32	45/110	–	2.0	110
	TC-F/TC-L	2G10/2G11	370	L18.121	<b>532149</b>	220,60	110	100	45	0.42	65/145	–	4.0	150
				L18.121	<b>528582</b>	220,60	150	140	45	0.43	65/145	–	4.0	150
				L18.249	<b>538801</b>	220,60	150	140	34	0.32	75/140	–	4.0	150
	T-U	2G13	370	L18.121	<b>532149</b>	220,60	110	100	45	0.42	65/145	–	4.0	150
				L18.121	<b>528582</b>	220,60	150	140	45	0.43	65/145	–	4.0	150
L18.249	<b>538801</b>	220,60	150	140	34	0.32	75/140	–	4.0	150				
2x18	TC-F/TC-L	2G10/2G11	400	L36.120	<b>509373</b>	220,60	150	140	45	0.43	60/170	–	4.0	210
24	TC-F/TC-L	2G10/2G11	345	L18.121	<b>532149</b>	220,60	110	100	45	0.42	65/145	–	4.0	190
				L18.121	<b>528582</b>	220,60	150	140	45	0.43	65/145	–	4.0	190
				L18.249	<b>538801</b>	220,60	150	140	34	0.32	75/140	–	4.0	190
26	TC-D/TC-T	G24d-3/GX24d-3	325	L18.121	<b>532149</b>	220,60	110	100	45	0.42	65/145	–	3.0	160
				L18.121	<b>528582</b>	220,60	150	140	45	0.43	65/145	–	3.0	160
				L18.249	<b>538801</b>	220,60	150	140	34	0.32	75/140	–	3.0	160
28	TC-DD	GR8/GR10q	320	L18.121	<b>532149</b>	220,60	110	100	45	0.42	65/145	–	3.0	155
				L18.249	<b>538801</b>	220,60	150	140	34	0.32	75/140	–	3.0	155
36	TC-F/TC-L	2G10/2G11	430	L36.120	<b>509373</b>	220,60	150	140	45	0.43	60/170	–	4.0	210
36/40	T-U/T-R	2G13/G10q	430	L36.120	<b>509373</b>	220,60	150	140	45	0.43	60/170	–	4.0	220
38	TC-DD	GR10q	430	L36.120	<b>509373</b>	220,60	150	140	45	0.43	60/170	–	4.0	220
58	T-U	2G13	670	L58.657	<b>164870</b>	220,60	195	180	92	0.80	55/140	–	6.0	320

\* Energy efficiency: EEI=B2 and EEI=B1, valid until 2017

1

2

3

4

5

6

7

8

9

10

## Ballasts 5–20 W 120 V/60 Hz

For compact fluorescent lamps  
Shape: 28 x 41 mm

Vacuum-impregnated with polyester resin



Push-in terminal for leads: 0.5–1 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads HO5V-U 0.5

tw 130

Protection class I

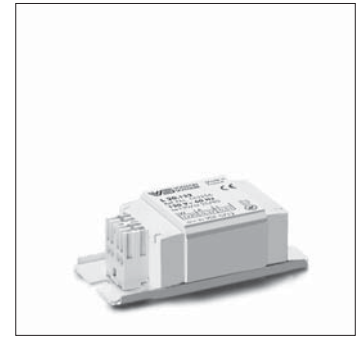

Lamp				Ballast								Capacitor	
Output	Type	Base	Current	Type	Ref. No.	Voltage	a	b	c	Weight	$\Delta t / \Delta t_{an}$	$C_p$	Current
W			mA			V, Hz	mm	mm	mm	kg	K	$\mu F$	mA
<b>120 V, 60 Hz</b>													
5	TC-S	G23	180	L7/9.209	<b>163318</b>	120, 60	85	75	34	0.32	25/40	3.0	90
7	TC-S	G23	175	L7/9.209	<b>163318</b>	120, 60	85	75	34	0.32	25/40	3.0	90
9	TC-S	G23	170	L7/9.209	<b>163318</b>	120, 60	85	75	34	0.32	25/40	3.0	90
18	TC-F/TC-L	2G10/2G11	370	L20.122	<b>163256</b>	120, 60	85	75	34	0.32	35/80	5.0	150
20	T-U	2G13	370	L20.122	<b>163256</b>	120, 60	85	75	34	0.32	35/80	5.0	190



## Standard Ballasts

### 4-13 W

### 230/240/220 V

For fluorescent lamps

Shape: 28 x 41 mm



Vacuum-impregnated with polyester resin

Push-in terminal for leads: 0.5-1 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads HO5V-U 0.5

tw 130

Protection class I

Lamp				Ballast									Capacitor	
Output	Type	Base	Current	Type	Ref. No.	Voltage	a	b	c	Weight	$\Delta t / \Delta t_{on}$	Energy efficiency*	C <sub>p</sub>	Current
W			mA			V, Hz	mm	mm	mm	kg	K		μF	mA
<b>230 V, 50 Hz</b>														
4	T5 (T16)	G5	170	L4/6/8.304	<b>163683</b>	230, 50	85	75	34	0.32	55/85	B2	2.0	40
2x4	T5 (T16)	G5	155	L4/6/8.304	<b>163683</b>	230, 50	85	75	34	0.32	55/85	B1	2.0	50
6	T5 (T16)	G5	160	L4/6/8.304	<b>163683</b>	230, 50	85	75	34	0.32	55/85	B1	2.0	50
2x6	T5 (T16)	G5	175	LN 13.313	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B1	2.0	65
8	T5 (T16)	G5	145	L4/6/8.304	<b>163683</b>	230, 50	85	75	34	0.32	55/85	B1	2.0	60
2x8	T5 (T16)	G5	155	LN 13.313	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B1	2.0	85
13	T5 (T16)	G5	165	LN 13.313	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B1	2.0	80
<b>240 V, 50 Hz</b>														
4	T5 (T16)	G5	170	L4/6/8.404	<b>164326</b>	240, 50	85	75	34	0.32	55/80	B2	2.0	40
2x4	T5 (T16)	G5	155	L4/6/8.404	<b>164326</b>	240, 50	85	75	34	0.32	55/80	B1	2.0	50
6	T5 (T16)	G5	160	L4/6/8.404	<b>164326</b>	240, 50	85	75	34	0.32	55/80	B1	2.0	50
2x6	T5 (T16)	G5	175	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B1	2.0	65
8	T5 (T16)	G5	145	L4/6/8.404	<b>164326</b>	240, 50	85	75	34	0.32	55/80	B1	2.0	60
2x8	T5 (T16)	G5	155	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B1	2.0	85
13	T5 (T16)	G5	165	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B1	2.0	80
<b>220 V, 60 Hz</b>														
4	T5 (T16)	G5	170	L4/6/8.218	<b>532644</b>	220, 60	85	75	34	0.32	60/80	-	2.0	40
2x4	T5 (T16)	G5	155	L4/6/8.218	<b>532644</b>	220, 60	85	75	34	0.32	60/80	-	2.0	50
6	T5 (T16)	G5	160	L4/6/8.218	<b>532644</b>	220, 60	85	75	34	0.32	60/80	-	2.0	50
2x6	T5 (T16)	G5	175	L 13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	-	2.0	65
8	T5 (T16)	G5	145	L4/6/8.218	<b>532644</b>	220, 60	85	75	34	0.32	60/80	-	2.0	60
2x8	T5 (T16)	G5	155	L 13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	-	2.0	85
13	T5 (T16)	G5	165	L 13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	-	2.0	80

\* Energy efficiency: EEI=B2 and EEI=B1, valid until 2017

## Standard Ballasts 14–65 W, 230 V

For fluorescent lamps

Shape: 28 x 41 mm

Vacuum-impregnated with polyester resin



Push-in terminal for leads: 0.5–1 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

tw 130

Protection class I

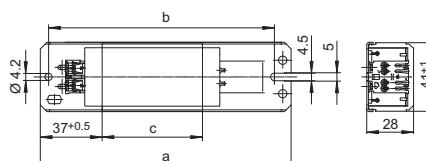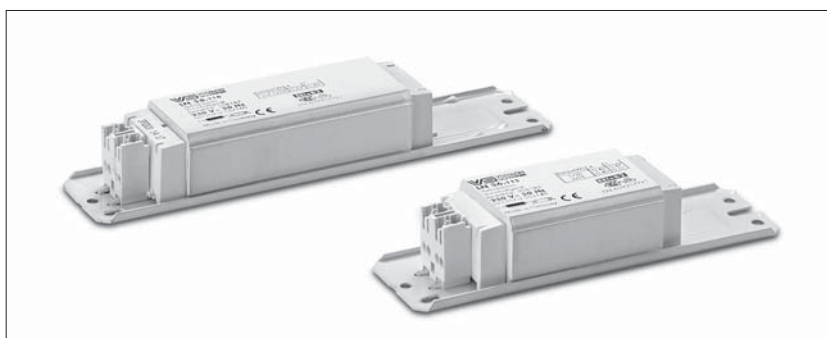

Lamp				Ballast									Capacitor	
Output W	Type	Base	Current mA	Type	Ref. No.	Voltage V, Hz	a mm	b mm	c mm	Weight kg	$\Delta t/\Delta t_{an}$ K	Energy efficiency*	C <sub>p</sub> μF	Current mA
<b>230 V, 50 Hz</b>														
14	T8 (T26)	G13	395	LN 18.510	<b>164572</b>	230, 50	155	140	92	0.80	40/65	B2	4.5	150
15	T8 (T26)	G13	310	LN 15.329	<b>163861</b>	230, 50	150	140	60	0.55	50/80	B2	3.5	120
2x15	T8 (T26)	G13	340	LN 30.801	<b>169645</b>	230, 50	150	140	60	0.55	55/110	B2	4.0	185
				L 30.347**	<b>164033</b>	230, 50	150	140	60	0.55	60/150	–	4.0	185
16	T8 (T26)	G13	200	LN 16.316	<b>163730</b>	230, 50	85	75	34	0.32	60/125	B1	2.0	90
18/20	T8 (T26)/T12 (T38)	G13	370	LN 18.510	<b>164572</b>	230, 50	155	140	92	0.80	40/65	B1	4.5	120
				LN 18.131	<b>530941</b>	230, 50	150	140	60	0.55	55/95	B2	4.5	120
				L 18.934**	<b>534621</b>	230, 50	150	140	45	0.43	70/150	–	4.5	120
2x18/20	T8 (T26)/T12 (T38)	G13	400	LN 2x18.135	<b>532155</b>	230, 50	150	140	45	0.43	65	B1	4.0	210
				L 36.334	<b>530007</b>	230, 50	150	140	60	0.55	60/155	B1	4.0	210
25	T12 (T38)	G13	290	L 25.346	<b>164013</b>	230, 50	150	140	60	0.55	45/80	B1	3.5	130
30	T8 (T26)	G13	365	LN 30.801	<b>169645</b>	230, 50	150	140	60	0.55	55/110	B2	4.5	180
36-1	T8 (T26)	G13	556	L 36i.342	<b>538072</b>	230, 50	195	180	110	0.87	50/120	B2	6.5	250
36/40	T8 (T26)/T12 (T38)	G13	430	LN 36.570	<b>169779</b>	230, 50	155	140	92	0.80	35/90	B1	4.5	210
				LN 36.511	<b>164590</b>	230, 50	155	140	92	0.80	35/95	B1	4.5	210
				LN 36.130	<b>527191</b>	230, 50	150	140	60	0.55	50/140	B2	4.5	210
				LN 36.149	<b>529029</b>	230, 50	150	140	60	0.55	55/150	B2	4.5	210
				L 36.132**	<b>535977</b>	230, 50	150	140	45	0.43	65	–	4.5	210
38	T8 (T26)	G13	430	LN 36.570	<b>169779</b>	230, 50	155	140	92	0.80	35/90	B1	4.5	210
				LN 36.511	<b>164590</b>	230, 50	155	140	92	0.80	35/95	B1	4.5	210
				LN 36.149	<b>529029</b>	230, 50	150	140	60	0.55	55/150	B2	4.5	210
				L 36.132**	<b>535977</b>	230, 50	150	140	45	0.43	65	–	4.5	210
58/65	T8 (T26)/T12 (T38)	G13	670	LN 58.568	<b>169389</b>	230, 50	233	220	160	1.31	35/95	B1	7.0	320
				LN 58.990	<b>509349</b>	230, 50	190	180	110	0.95	50/130	B2	7.0	320
				LN 58.116	<b>508186</b>	230, 50	190	180	92	0.80	55/160	B2	7.0	320
				L 58.718**	<b>169658</b>	230, 50	190	180	92	0.80	60/170	–	7.0	320

\* Energy efficiency: EEI=B2 and EEI=B1, valid until 2017

\*\* Ballasts without CE mark for markets outside of the EU

## Standard Ballasts

### 15–75 W, 240/220 V

For fluorescent lamps

Shape: 28 x 41 mm

Lamp				Ballast										Capacitor	
Output	Type	Base	Current	Type	Ref. No.	Voltage	a	b	c	Weight	$\Delta t/\Delta t_{0n}$	Energy efficiency*	C <sub>p</sub>	Current	
W			mA			V, Hz	mm	mm	mm	kg	K		μF	mA	
<b>240 V, 50 Hz</b>															
2x15	T8 (T26)	G13	340	LN 30.806	<b>533067</b>	240, 50	150	140	60	0.55	55/130	B2	4.0	185	
16	T8 (T26)	G13	200	LN 16.417	<b>164358</b>	240, 50	85	75	34	0.32	60/130	B1	2.0	90	
18/20	T8 (T26)/T12 (T38)	G13	370	LN 18.507	<b>164566</b>	240, 50	155	140	92	0.80	35/60	B1	4.5	120	
				LN 18.162	<b>533043</b>	240, 50	150	140	60	0.55	60/110	B2	4.5	120	
				L 18.936**	<b>534627</b>	240, 50	150	140	45	0.43	70/140	–	4.5	120	
2x18/20	T8 (T26)/T12 (T38)	G13	400	LN 2x18.135	<b>535778</b>	240, 50	150	140	45	0.43	65	B1	4.0	210	
				L 36/40.443	<b>530008</b>	240, 50	150	140	60	0.55	65/155	B1	4.0	210	
				LN 36.201	<b>527196</b>	240, 50	150	140	60	0.55	55/140	B1	4.0	210	
				LN 36.505	<b>164555</b>	240, 50	155	140	92	0.80	40/95	B1	4.0	210	
30	T8 (T26)	G13	365	LN 30.806	<b>533067</b>	240, 50	150	140	60	0.55	55/130	B2	4.5	180	
36/40	T8 (T26)/T12 (T38)	G13	430	LN 36.505	<b>164555</b>	240, 50	155	140	92	0.80	40/95	B1	4.5	210	
				LN 36.201	<b>527196</b>	240, 50	150	140	60	0.55	55/140	B2	4.5	210	
				L 36/40.443**	<b>164438</b>	240, 50	150	140	60	0.55	65/155	–	4.5	210	
38	T8 (T26)	G13	430	LN 36.505	<b>164555</b>	240, 50	155	140	92	0.80	40/95	B1	4.5	210	
				LN 36.201	<b>527196</b>	240, 50	150	140	60	0.55	55/140	B2	4.5	210	
				L 36/40.443**	<b>164438</b>	240, 50	150	140	60	0.55	65/155	–	4.5	210	
58/65	T8 (T26)/T12 (T38)	G13	670	LN 58.506	<b>164560</b>	240, 50	233	220	160	1.31	35/85	B1	7.0	320	
				LN 58.192	<b>507936</b>	240, 50	190	180	110	0.95	50/150	B2	7.0	320	
				LN 58.722	<b>534252</b>	240, 50	190	180	92	0.80	60/180	B2	7.0	320	
<b>new</b>	70/75	T8 (T26)/T12 (T38)	G13	670	LN 75.170	<b>533650</b>	240, 50	190	180	110	0.95	50/150	B2	6.0	320
<b>220 V, 50 Hz</b>															
18/20	T8 (T26)/T12 (T38)	G13	370	L 18.933	<b>534624</b>	220, 50	150	140	45	0.43	70/160	–	4.5	120	
2x18/20	T8 (T26)/T12 (T38)	G13	430	L 36.158	<b>530252</b>	220, 50	150	140	45	0.43	65	–	4.0	210	
36/40	T8 (T26)/T12 (T38)	G13	430	L 36.158	<b>530252</b>	220, 50	150	140	45	0.43	65	–	4.5	210	
38	T8 (T26)	G13	430	L 36.158	<b>530252</b>	220, 50	150	140	45	0.43	65	–	4.5	210	
58/65	T8 (T26)/T12 (T38)	G13	670	L 58.625	<b>164828</b>	220, 50	190	180	92	0.80	55/155	–	7.0	320	
<b>220 V, 60 Hz</b>															
15	T8 (T26)	G13	310	L 15.007	<b>537744</b>	220, 60	150	140	45	0.43	55/80	–	3.0	120	
2x15	T8 (T26)	G13	350	L 30.006	<b>537750</b>	220, 60	150	140	45	0.43	60/120	–	4.0	185	
18/20	T8 (T26)/T12 (T38)	G13	370	L 18.121	<b>532149</b>	220, 60	110	100	45	0.42	65/145	–	4.0	190	
				L 18.121	<b>528582</b>	220, 60	150	140	45	0.43	65/145	–	4.0	190	
				L 18.149	<b>538801</b>	220, 60	150	140	34	0.32	75/140	–	4.0	190	
2x18/20	T8 (T26)/T12 (T38)	G13	430	L 36.120	<b>509373</b>	220, 60	150	140	45	0.43	60/170	–	4.0	220	
30	T8 (T26)	G13	365	L 30.006	<b>537750</b>	220, 60	150	140	45	0.43	60/120	–	4.0	180	
36/40	T8 (T26)/T12 (T38)	G13	430	L 36.120	<b>509373</b>	220, 60	150	140	45	0.43	60/170	–	4.0	220	
38	T8 (T26)	G13	430	L 36.120	<b>509373</b>	220, 60	150	140	45	0.43	60/170	–	4.0	230	
58/65	T8 (T26)/T12 (T38)	G13	670	L 58.657	<b>164870</b>	220, 60	195	180	92	0.80	55/140	–	6.0	320	

\* Energy efficiency: EEI=B2 and EEI=B1, valid until 2017



\*\* Ballasts without CE mark for markets outside of the EU

## Ballasts

### 14-20 W

### 120 V/60 Hz

**For fluorescent lamps**  
**Shape: 28 x 41 mm**

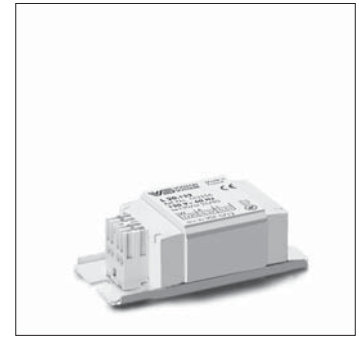

Vacuum-impregnated with polyester resin

Push-in terminal for leads: 0.5-1 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads HO5V-U 0.5

tw 130

Protection class I

Lamp				Ballast								Capacitor	
Output	Type	Base	Current	Type	Ref. No.	Voltage	a	b	c	Weight	$\Delta t/\Delta t_{an}$	C <sub>p</sub>	Current
W			mA			V, Hz	mm	mm	mm	kg	K	$\mu$ F	mA
<b>120 V, 60 Hz</b>													
14	T8 (T26)	G13	395	L 14.139	<b>170117</b>	120, 60	85	75	34	0.32	55/90	7.0	175
15	T8 (T26)	G13	350	L 15.308	<b>163702</b>	120, 60	85	75	34	0.32	35/65	7.0	170
18/20	T8 (T26)/T12 (T38)	G13	370	L 20.122	<b>163256</b>	120, 60	85	75	34	0.32	35/80	5.0	190

1

2

**3**

4

5

6

7

8

9

10



## COMPACT AND VERSATILE



### VS LAMPHOLDERS FOR COMPACT FLUORESCENT LAMPS

Vossloh-Schwabe provides a broad range of lampholders for single-ended compact fluorescent lamps, with regard to which the numerous fixing methods make just about any luminaire design possible.

As compact fluorescent lamps generate considerably less heat in comparison to incandescent lamps, the advantages provided by thermoplastics can be fully utilized for lampholder design.

Almost all VS lampholders for compact fluorescent lamps are made of thermoplastic PBT and therefore bear the T marking T140, which refers to the maximum base temperature in accordance with EN 61199 (VDE 0715 T9). The use of this highly heat-resistant material was born of close cooperation between Vossloh-Schwabe and the world's leading lamp manufacturers that also use PBT for producing lamp bases. In connection with fatigue-resistant, stainless steel lamp mounting springs, harmonizing the casing material ensures a permanent and secure lamp fit.



# 3

## Lampholders and Accessories for TC Lamps

<b>G24, GX24 lampholders</b>	<b>180–187</b>
<b>2G7 lampholders</b>	<b>187–188</b>
<b>G23 lampholders</b>	<b>188–191</b>
<b>GR8, GR10q, GRY10q-3, GRZ10d, GRZ10t lampholders</b>	<b>191–192</b>
<b>2G10 lampholders</b>	<b>192</b>
<b>2G11/2GX11 lampholders</b>	<b>193–194</b>
<b>Accessories</b>	<b>195–197</b>
<b>GX53-1 lampholders, accessories</b>	<b>198–199</b>
<b>Technical details for fluorescent lamps</b>	<b>243–271</b>
General technical details	394–401
Glossary	402–404

1

2

3

4

5

6

7

8

9

10

## G24, GX24 Lampholders

### For single-ended compact fluorescent lamps TC-D, TC-T, TC-DEL, TC-TEL

The drawings and photos contained in this chapter only show lampholders for lamps with base G24q-1. Further drawings of lamp bases can be found on page 266.

When mounting the lampholder it has to be considered that the TC-T and TC-TEL lamp is wider than the lampholder. When using the central hole for mounting additional depressions for anti-rotation pips have to be provided.

G24, GX24 lampholders

Plain casing

Casing: PBT GF, white, T140

Nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

In addition for G24q, GX24q lampholders:

push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST4.2-C/F

Front fixing holes for screws M3

Central fixing hole for screw M3

Rotation stop

For cover caps (see p. 336-338)

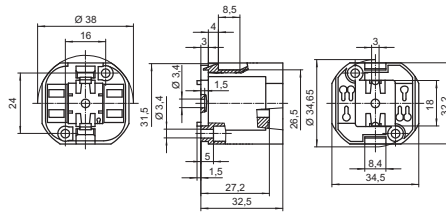

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
71501	<b>527735</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	13	500
71502	<b>527736</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	13	500
71503	<b>527737</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	13	500
71511	<b>527739</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	14.5	500
71512	<b>527740</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	14.5	500
71513	<b>527741</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	14.5	500
71519	<b>527745</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	14.5	500
71514	<b>527742</b>	GX24q-4	TC-TEL	42	14.5	500
71515	<b>527743</b>	GX24q-5	TC-TEL	57	15.1	500
71516	<b>527744</b>	GX24q-6	TC-TEL	70	15.1	500

\* Lampholder 527745 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

# Lampholders and Accessories for TC Lamps

## G24, GX24 lampholders

External thread 40x2.5 IEC 60399

Casing: PBT GF, white, T140

Nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

In addition for G24q, GX24q lampholders:

push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Rear fixing holes for self-tapping screws

acc. to ISO 1481/7049-ST4.2-C/F


Front fixing holes for screws M3

Central fixing hole for screw M3

Rotation stop

For cover caps (see p. 336-338)

For screw rings (see p. 451)

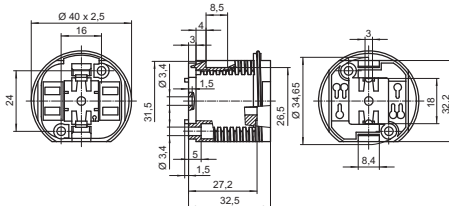

1

2

3

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
71001	<b>527502</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	12.7	500
71002	<b>527503</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	12.7	500
71003	<b>527504</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	12.7	500
71011	<b>527506</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	15.2	500
71012	<b>527507</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	15.2	500
71013	<b>527508</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	15.2	500
71019	<b>527512</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	15.2	500
71014	<b>527509</b>	GX24q-4	TC-TEL	42	15.2	500
71015	<b>527510</b>	GX24q-5	TC-TEL	57	15.8	500
71016	<b>527511</b>	GX24q-6	TC-TEL	70	15.8	500

\* Lampholder 527512 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

4

5

6

## G24, GX24 lampholders

External thread 40x2.5 IEC 60399

Casing: PBT GF, white T140

Nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

In addition for G24q, GX24q lampholders:

push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)


Front fixing holes for screws M3

Central fixing hole for screw M3

Rotation stop

For cover caps (see p. 336-338)

For screw rings (see p. 451)

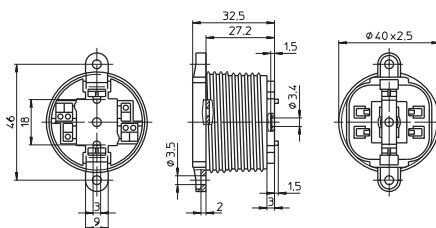

7

8

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
35812	<b>101410</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	18	500
35842	<b>106262</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	18	500
35862	<b>101448</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	18	500
35912	<b>106912</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	19.5	500
35942	<b>502555</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	19.5	500
35962	<b>502556</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	19.5	500

9

10

# Lampholders and Accessories for TC Lamps

## G24, GX24 lampholders

Profiled shape

Casing: PBT GF, white, T140

Nominal rating: 2/500



Push-in twin terminals: 0.5 - 1 mm<sup>2</sup> (lamp circuit)

In addition for G24q, GX24q lampholders:

push-in terminals: 0.5 - 1 mm<sup>2</sup> (starter circuit)

Central fixing hole for screw M3

Rotation stop

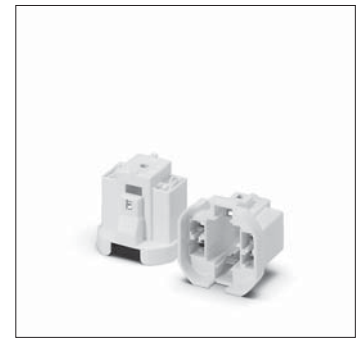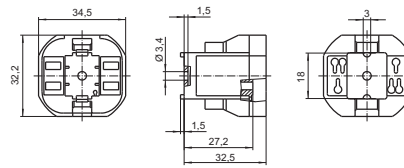

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
71101	<b>527529</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	8.5	500
71102	<b>527530</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	8.5	500
71103	<b>527531</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	8.5	500
71111	<b>527533</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	10.9	500
71112	<b>527534</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	10.9	500
71113	<b>527535</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	10.9	500
71119	<b>527539</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	10.9	500
71114	<b>527536</b>	GX24q-4	TC-TEL	42	10.9	500
71115	<b>527537</b>	GX24q-5	TC-TEL	57	11.1	500
71116	<b>527538</b>	GX24q-6	TC-TEL	70	11.1	500

\* Lampholder 527539 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

## G24, GX24 push-fit lampholders

Lamp position: 45°

Casing: PBT GF, white, T140

Nominal rating: 2/500

Push-in twin terminals: 0.5 - 1 mm<sup>2</sup> (lamp circuit)


In addition for G24q, GX24q lampholders:

push-in terminals: 0.5 - 1 mm<sup>2</sup> (starter circuit)

Push-fit foot for cut-out 10x20 mm

for wall thickness 0.6 - 1 mm

Foot with facility for cable routing

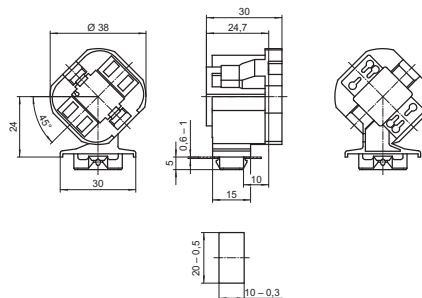

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
71301	<b>527585</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	10.2	500
71302	<b>527586</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	10.2	500
71303	<b>527587</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	10.2	500
71311	<b>527589</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	12.1	500
71312	<b>527590</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	12.1	500
71313	<b>527591</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	12.1	500
71319	<b>527596</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	12.1	500
71314	<b>527592</b>	GX24q-4	TC-TEL	42	12.1	500
71315	<b>527594</b>	GX24q-5	TC-TEL	57	12.6	500
71316	<b>527595</b>	GX24q-6	TC-TEL	70	12.6	500

\* Lampholder 527596 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

# Lampholders and Accessories for TC Lamps

## G24 push-fit lampholders

Lamp position: 45°

Casing: PBT GF, white, T140


Nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

In addition for G24q lampholders:

push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Split pins for wall thickness up to 1.2 mm

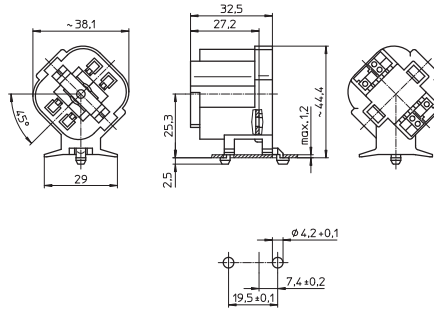

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
35814	<b>106893</b>	G24d-1	TC-D	10, 13	14.3	500
35844	<b>107617</b>	G24d-2	TC-D	18	14.3	500
35864	<b>107618</b>	G24d-3	TC-D	26	14.3	500
35914	<b>107861</b>	G24q-1	TC-DEL	10, 13	15	500
35944	<b>108575</b>	G24q-2	TC-DEL	18	15	500
35964	<b>108576</b>	G24q-3	TC-DEL	26	15	500

## G24, GX24 push-fit lampholders

Casing: PBT GF, white, T140

Nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)


In addition for G24q, GX24q lampholders:

push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Push-fit foot for cut-out 10x20 mm

for wall thickness 0.6-1 mm

Foot with facility for cable routing

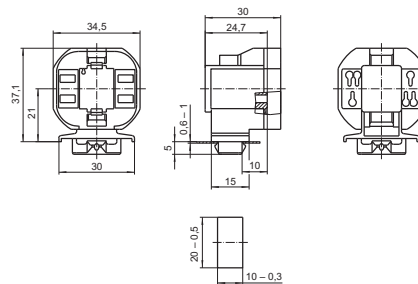

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
71801	<b>528029</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	10.2	500
71802	<b>528030</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	10.2	500
71803	<b>528031</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	10.2	500
71811	<b>528033</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	12.1	500
71812	<b>528034</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	12.1	500
71813	<b>528035</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	12.1	500
71819	<b>528039</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	12.1	500
71814	<b>528036</b>	GX24q-4	TC-TEL	42	12.1	500
71815	<b>528037</b>	GX24q-5	TC-TEL	57	12.7	500
71816	<b>528038</b>	GX24q-6	TC-TEL	70	12.7	500

\* Lampholder 528039 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

# Lampholders and Accessories for TC Lamps

G24, GX24 surface-mounted lampholders

Casing: PBT GF, white, T140, Nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

In addition for G24q, GX24q lampholders:  
push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)



Base fixing holes for self-tapping screws  
acc. to ISO 1481/7049-ST4.2-C/F

Base oblong holes for screws M4

Rear fixing holes for self-tapping screws

acc. to ISO 1481/7049-ST2.9-C/F  
and ST4.2-C/F

Front fixing holes for screws M3

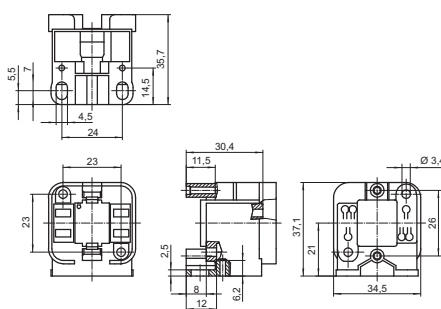

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
71701	<b>527790</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	13.2	500
71702	<b>527791</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	13.2	500
71703	<b>527792</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	13.2	500
71711	<b>527794</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	15.2	500
71712	<b>527795</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	15.2	500
71713	<b>527796</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	15.2	500
71719	<b>527800</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	15.2	500
71714	<b>527797</b>	GX24q-4	TC-TEL	42	15.2	500
71715	<b>527798</b>	GX24q-5	TC-TEL	57	15.8	500
71716	<b>527799</b>	GX24q-6	TC-TEL	70	15.8	500

\* Lampholder 527800 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

G24, GX24 surface-mounted lampholders



Casing: PBT GF, white, T140

Nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

In addition for G24q, GX24q lampholders:  
push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Front fixing holes for screws M3

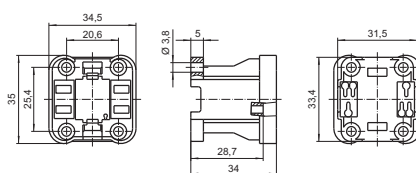

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
71201	<b>527556</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	12	500
71202	<b>527557</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	12	500
71203	<b>527558</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	12	500
71211	<b>527560</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	12.9	500
71212	<b>527561</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	12.9	500
71213	<b>527562</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	12.9	500
71219	<b>527566</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	12.9	500
71214	<b>527563</b>	GX24q-4	TC-TEL	42	12.9	500
71215	<b>527564</b>	GX24q-5	TC-TEL	57	13.5	500
71216	<b>527565</b>	GX24q-6	TC-TEL	70	13.5	500

\* Lampholder 527566 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

# Lampholders and Accessories for TC Lamps

G24, GX24 push-fit lampholders

Casing: PBT GF, white, T140



Nominal rating: 2/500

Push-in twin terminals: 0.5 - 1 mm<sup>2</sup> (lamp circuit)

In addition for G24q, GX24q lampholders:

push-in terminals: 0.5 - 1 mm<sup>2</sup> (starter circuit)

Base split pins for wall thickness 0.8 - 1.7 mm

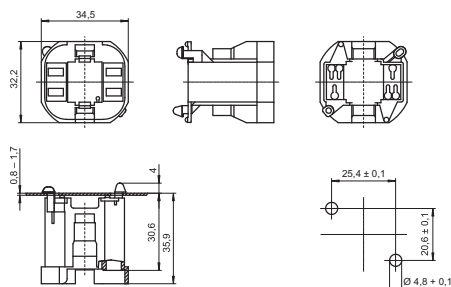

1

2

3

4

5

6

7

8

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
71601	<b>527762</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	10.5	500
71602	<b>527763</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	10.5	500
71603	<b>527764</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	10.5	500
71611	<b>527766</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	12	500
71612	<b>527768</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	12	500
71613	<b>527769</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	12	500
71619	<b>527773</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	12	500
71614	<b>527770</b>	GX24q-4	TC-TEL	42	12	500
71615	<b>527771</b>	GX24q-5	TC-TEL	57	12.6	500
71616	<b>527772</b>	GX24q-6	TC-TEL	70	12.6	500

\* Lampholder 527773 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42W.

G24, GX24 push-fit lampholders

Casing: PBT GF, white, T140



Nominal rating: 2/500

Push-in twin terminals: 0.5 - 1 mm<sup>2</sup> (lamp circuit)

In addition for G24q, GX24q lampholders:

push-in terminals: 0.5 - 1 mm<sup>2</sup> (starter circuit)

Base split pins for wall thickness 0.8 - 1.7 mm

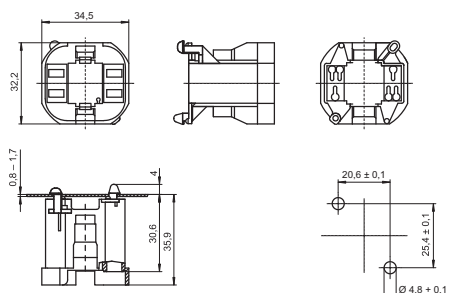

9

10

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
72201	<b>530458</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	10.5	500
72202	<b>530459</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	10.5	500
72203	<b>530460</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	10.5	500
72211	<b>530462</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	12	500
72212	<b>530463</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	12	500
72213	<b>530464</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	12	500
72219	<b>530468</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	12	500
72214	<b>530465</b>	GX24q-4	TC-TEL	42	12	500
72215	<b>530466</b>	GX24q-5	TC-TEL	57	12.6	500
72216	<b>530467</b>	GX24q-6	TC-TEL	70	12.6	500

\* Lampholder 530468 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42W.



# Lampholders and Accessories for TC Lamps

G24, GX24 push-fit lampholders

Casing: PBT GF, white, T140

Nominal rating: 2/500



Push-in twin terminals: 0.5–1 mm<sup>2</sup> (lamp circuit)

In addition for G24q, GX24q lampholders:

push-in terminals: 0.5–1 mm<sup>2</sup> (starter circuit)

Rear split pins for wall thickness 0.8–1.7 mm

Width of split pin: 6.5 mm

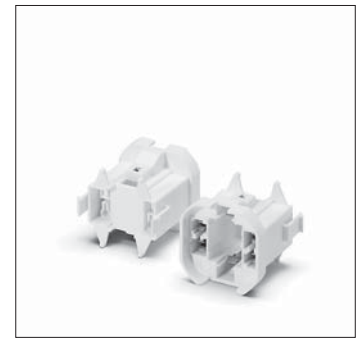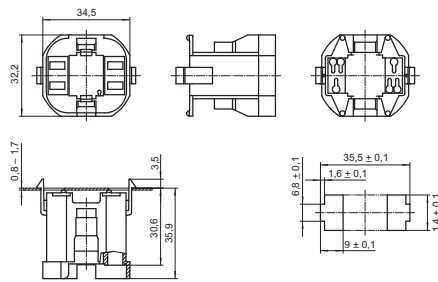

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
72001	<b>528089</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	10.4	500
72002	<b>528090</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	10.4	500
72003	<b>528091</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	10.4	500
72011	<b>528093</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	12.3	500
72012	<b>528094</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	12.3	500
72013	<b>528095</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	12.3	500
72019	<b>528099</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	12.3	500
72014	<b>528096</b>	GX24q-4	TC-TEL	42	12.3	500
72015	<b>528097</b>	GX24q-5	TC-TEL	57	12.9	500
72016	<b>528098</b>	GX24q-6	TC-TEL	70	12.9	500

\* Lampholder 528099 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

G24, GX24 push-fit lampholders

Casing: PBT GF, white, T140

Nominal rating: 2/500



Push-in twin terminals: 0.5–1 mm<sup>2</sup> (lamp circuit)

In addition for G24q, GX24q lampholders:

push-in terminals: 0.5–1 mm<sup>2</sup> (starter circuit)

Rear split pins for wall thickness 0.8–1.7 mm

Width of split pin: 4.5 mm

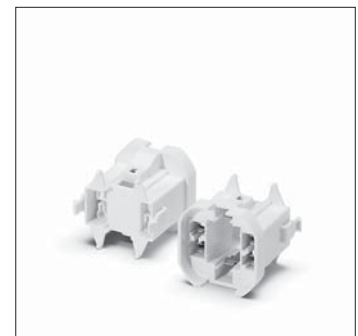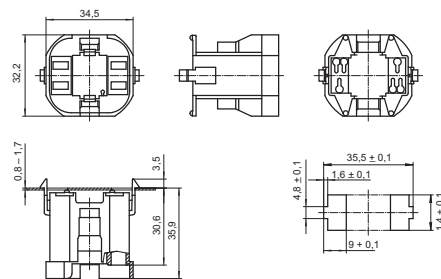

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
72101	<b>528116</b>	G24d-1/GX24d-1	TC-D/TC-T	10, 13 / 13	10.4	500
72102	<b>528117</b>	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	10.4	500
72103	<b>528118</b>	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	10.4	500
72111	<b>528120</b>	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	12.3	500
72112	<b>528121</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	12.3	500
72113	<b>528122</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	12.3	500
72119	<b>528126</b>	GX24q-3/-4*	TC-TEL	26, 32 / 42	12.3	500
72114	<b>528123</b>	GX24q-4	TC-TEL	42	12.3	500
72115	<b>528124</b>	GX24q-5	TC-TEL	57	12.9	500
72116	<b>528125</b>	GX24q-6	TC-TEL	70	12.9	500

\* Lampholder 528126 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

# Lampholders and Accessories for TC Lamps

G24, GX24 rotary lock lampholders

External thread 40x2.5 IEC 60399

Casing: PBT GF, white, T120


Nominal rating: 1/500

Push-in twin terminals: 0.5–0.75 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5–0.75 mm<sup>2</sup> (starter circuit)

Front fixing holes for screws M3

For screw rings (see p. 451)

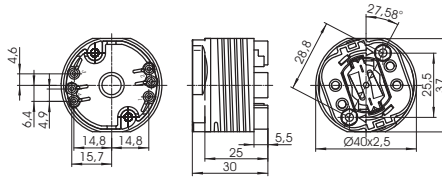

1

2

Type	Ref. No.	Base	Lamp	Output (W)	Weight (g)	Unit (pcs.)
45940	<b>507993</b>	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	20.2	500
45960	<b>507994</b>	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	20.2	500
45930	<b>507992</b>	G24q-3/GX24q-3/4*	TC-DEL/TC-TEL	26 / 26, 32 / 42	20.2	500
45980	<b>507995</b>	GX24q-4	TC-TEL	42	20.2	500

\* Lampholder 507992 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

3

4

5

## 2G7 Lampholders

**For single-ended compact fluorescent lamps TC-SEL**

2G7 push-fit lampholder

Casing: PBT GF, white, T140, nominal rating: 2/250

Push-in twin terminals: 0.5–1 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5–1 mm<sup>2</sup> (starter circuit)

Rear fixing hole for self-tapping screw

acc. to ISO 1481/7049-ST4.2-C/F



Front fixing holes for screws M3

Locking of the lampholder by a 15° turn

Weight: 13.7 g, unit: 500 pcs.

Type: 35610

**Ref. No.: 109235**

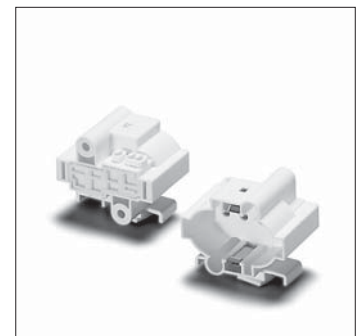

7

8

2G7 push-fit lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in twin terminals: 0.5–1 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5–1 mm<sup>2</sup> (starter circuit)



Push-fit foot for cut-out 10x20 mm

for wall thickness 0.6–1 mm

Weight: 18 g, unit: 500 pcs.

Type: 35613

**Ref. No.: 500574**

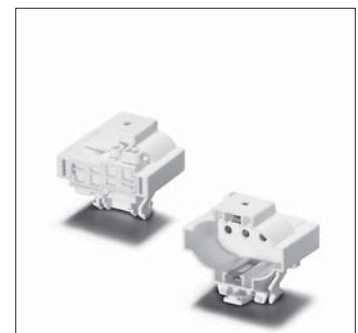

9

10

# Lampholders and Accessories for TC Lamps

## 2G7 surface-mounted lampholder

Casing: PBT GF, white, T140, nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Fixing holes for screws M4



Lateral and rear fixing holes for self-tapping screws acc. to ISO 1481/7049-ST4.2-C/F

Front fixing holes for screws M3

Weight: 18.1 g, unit: 500 pcs.

Type: 35611

**Ref. No.: 109238**

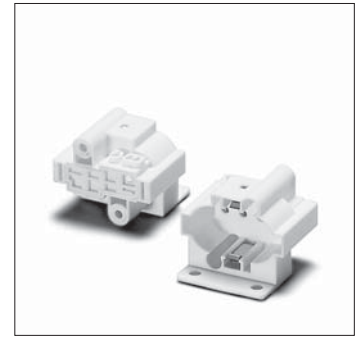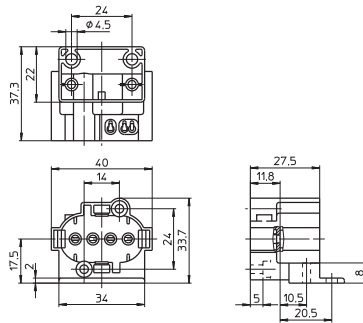

## 2G7 surface-mounted lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)



Rear fixing holes for self-tapping screws acc. to ISO 1481/7049-ST4.2-C/F

Front fixing holes for screws M3

Weight: 14 g, unit: 500 pcs.

Type: 35612

**Ref. No.: 109240**

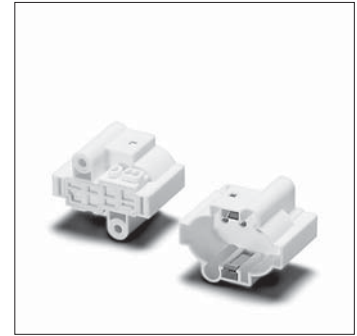

## G23 Lampholders

### For single-ended compact fluorescent lamps TC-S

If the central hole is used for mounting, make sure there is no risk of rotation.

## G23 surface-mounted lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup>



Rear fixing holes for self-tapping screws acc. to ISO 1481/7049-ST2.9-C/F

Central fixing hole for screw M3

Weight: 11.6 g, unit: 500 pcs.

Type: 35002

**Ref. No.: 101290**

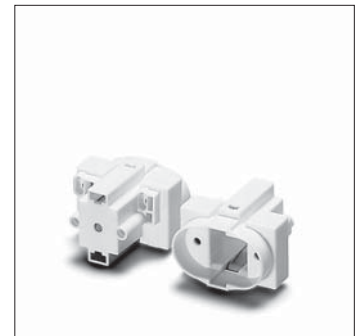

## G23 lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup>



Front and rear fixing holes for self-tapping screws acc. to ISO 1481/7049-ST2.9-C/F

Central fixing hole for screw M3

Weight: 9 g, unit: 500 pcs.

Type: 35003

**Ref. No.: 101294**

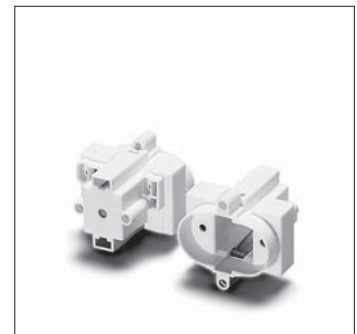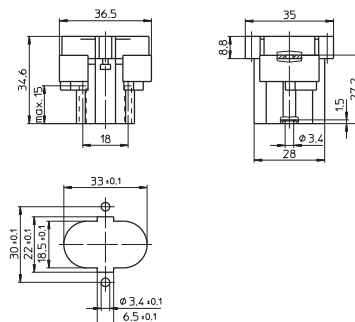

# Lampholders and Accessories for TC Lamps

## G23 push-fit lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup>



Split pins for wall thickness up to 1.2 mm

Central fixing hole for screw M3

Weight: 12 g, unit: 500 pcs.

Type: 35004

**Ref. No.: 101298**

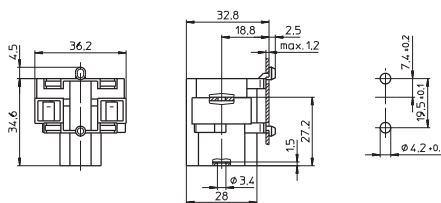

1

2

## G23 surface-mounted lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup>


Fixing holes for screws M4

Central fixing hole for screw M3

Weight: 12.4 g, unit: 500 pcs.

Type: 35006

**Ref. No.: 101306**



3

4

## G23 lampholder

For push-fit on track

Casing: PBT GF, white, T140, nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup>

Lateral fixing holes for self-tapping screws acc. to ISO 1481/7049-ST2.9-C/F


Fixing holes for screws M4

Central fixing hole for screw M3

Weight: 14 g, unit: 500 pcs.

Type: 35007

**Ref. No.: 101310**

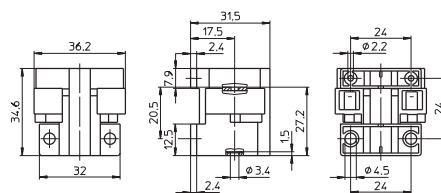

5

6

## G23 surface-mounted lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup>



Fixing holes for screws M4

Central fixing hole for screw M3

Weight: 11.1 g, unit: 500 pcs.

Type: 35008

**Ref. No.: 101314**



7

8

## G23 lampholder, for cover caps (see p. 336-338)

External thread 40x2.5 IEC 60399

Casing: PBT GF, white, T140, nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup>

Central fixing hole for screw M3


When using the central hole for mounting additional depressions for anti-rotation pips have to be provided.

For screw rings (see p. 451)

Weight: 16.3 g, unit: 500 pcs.

Type: 35010

**Ref. No.: 101320**

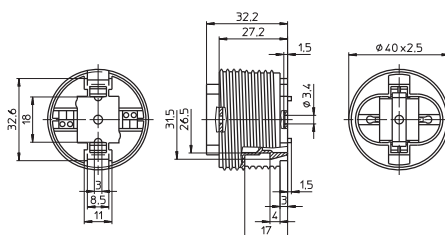

9



10

# Lampholders and Accessories for TC Lamps

## G23 lampholder

Casing: PBT GF, white, T140  
 Nominal rating: 2/250  
 Push-in twin terminals: 0.5–1 mm<sup>2</sup>  
 Lateral pivots for bracket 105820 (see p. 195)  
 Central fixing hole for screw M3  
 Weight: 11 g, unit: 500 pcs.  
 Type: 35011


**Ref. No.: 101324**

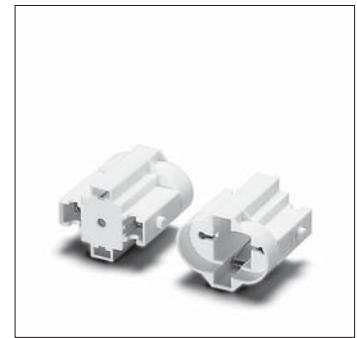

## G23 surface-mounted lampholder

Casing: PBT GF, white, T140  
 Nominal rating: 2/250  
 Push-in twin terminals: 0.5–1 mm<sup>2</sup>  
 Front fixing holes for screws M3  
 Rear fixing holes for self-lapping screws acc. to ISO 1481/7049-ST4.2-C/F  
 Weight: 11.9 g, unit: 500 pcs.  
 Type: 35012


**Ref. No.: 108898**



## G23 push-fit lampholder

Casing: PBT GF, white, T140  
 Nominal rating: 2/250  
 Push-in twin terminals: 0.5–1 mm<sup>2</sup>  
 Push-fit foot for wall thickness 0.8–1.3 mm  
 Central fixing hole for screw M3  
 Weight: 11 g, unit: 500 pcs.  
 Type: 35051



**Ref. No.: 101344**



## G23 push-fit lampholder

Casing: PBT GF, white, T140  
 Nominal rating: 2/250  
 Push-in twin terminals: 0.5–1 mm<sup>2</sup>  
 Front split pins for wall thickness 0.8–1.3 mm  
 Central fixing hole for screw M3  
 Weight: 12 g, unit: 500 pcs.  
 Type: 35052


**Ref. No.: 101346**

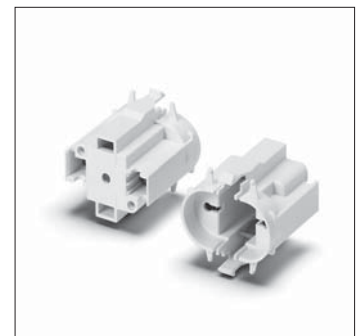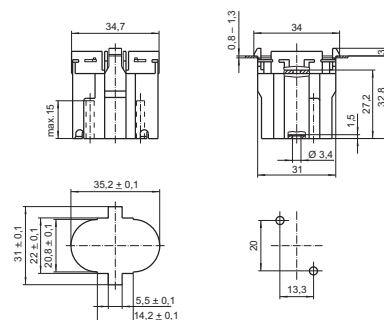

## G23 lampholder

Casing: PBT GF, white, T140  
 Nominal rating: 2/250  
 Push-in terminals: 0.5–1 mm<sup>2</sup>  
 Central fixing hole for screw M3  
 Particularly suitable for narrow mounting (e.g. for insertion into tube systems)  
 Weight: 8 g, unit: 500 pcs.  
 Type: 35201

**Ref. No.: 101364**



G23 lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in terminals: 0.5-1 mm<sup>2</sup>



Central fixing hole for screw M3

Particularly suitable for narrow mounting  
(e.g. for insertion into tube systems)

Weight: 8.2 g, unit: 500 pcs.

Type: 35202

**Ref. No.: 101367**



1

2

3

## GR8, GR10q, GRY10q-3, GRZ10d, GRZ10t Lampholders

**For single-ended compact fluorescent lamps TC-DD**

GR8 push-fit lampholder

Casing: PC, white

Nominal rating: 2/250


Base and front push-in terminals: 0.5-1 mm<sup>2</sup>

Fixing clips for wall thickness up to 1 mm

Weight: 5.4 g, unit: 500 pcs.

Type: 35100

**Ref. No.: 101358**

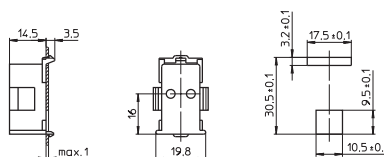

5

6

GR10q push-fit lampholder

Casing: PC, white, T110

Nominal rating: 2/250


Base push-in terminals: 0.5-1 mm<sup>2</sup>

Base fixing clip for wall thickness 0.6-1 mm

Weight: 6.2 g, unit: 1000 pcs.

Type: 35500

**Ref. No.: 108927**

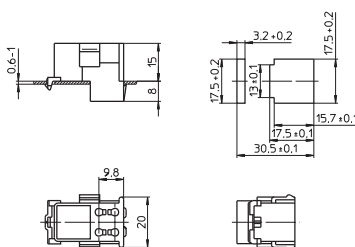

7

8

GR10q push-fit lampholder

Casing: PC, white, T110

Nominal rating: 2/250


Base push-in terminals: 0.5-1 mm<sup>2</sup>

Base split pins for wall thickness 0.6-1 mm

Weight: 6.2 g, unit: 1000 pcs.

Type: 35510

**Ref. No.: 108928**

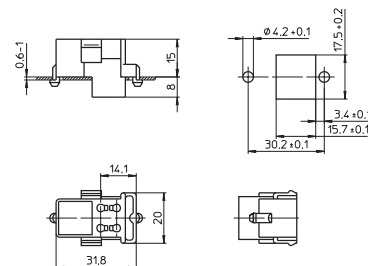

9

10

# Lampholders and Accessories for TC Lamps

GR10q push-fit lampholder

Material: PBT, white, T110

Nominal rating: 2/250


Lateral push-in terminals: 0.5-1 mm<sup>2</sup>

Base fixing clip for wall thickness 0.6-1 mm

Weight: 7.2 g, unit: 1000 pcs.

Type: 35530

**Ref. No.: 108932**

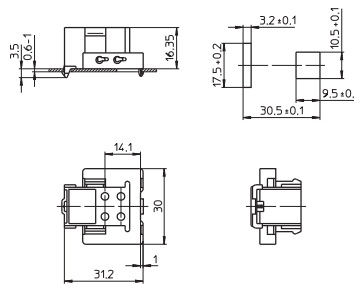

GR10q push-fit lampholder

Material: PBT, white, T110

Nominal rating: 2/250



Lateral push-in terminals: 0.5-1 mm<sup>2</sup>

Base split pins for wall thickness 0.6-1 mm

Weight: 7.2 g, unit: 1000 pcs.

Type: 35540

**Ref. No.: 108933**

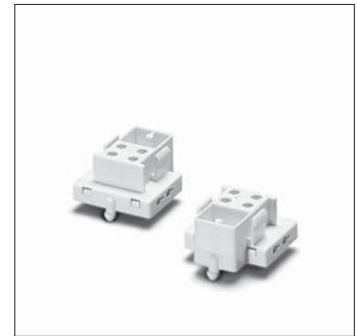

GR10q surface-mounted lampholder

Material: PBT, white, T110

Nominal rating: 2/250



Lateral push-in terminals: 0.5-1 mm<sup>2</sup>

Fastening slots for screws M3

Weight: 7.4 g, unit: 1000 pcs.

Type: 35550

**Ref. No.: 108934**

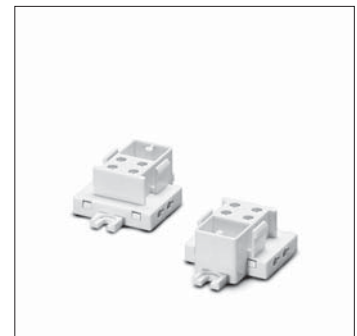

## 2G10 Lampholders

**For single-ended compact fluorescent lamps TC-F**

2G10 surface-mounted lampholder, with lamp lock

Casing: PBT GF, white, T140, nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup>

Lateral lamp insertion

Front fixing holes for cheese-head screws M3

Rear fixing holes for self-lapping screws


acc. to ISO 1481/7049-ST4.2-C/F

Base fixing holes for screws M4

Weight: 25.5 g, unit: 250 pcs.

Type: 36300

**Ref. No.: 101521**

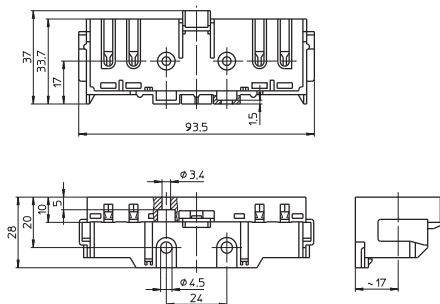



## 2G11/2GX11 Lampholders

For single-ended compact fluorescent lamps TC-L

2G11 surface-mounted lampholder

Casing: PBT GF, white, T140, nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Lateral pivots for bracket 105824 (see p. 195)

Base fixing holes for screws M4

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST4.2-C/F

Front fixing holes for screws M3

Weight: 13.7 g, unit: 500 pcs.

Type: 36050

**Ref. No.: 101485**



2G11 surface-mounted lampholder

Casing: PBT GF, white, T140, nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Lateral pivots for bracket 105824 (see p. 195)

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST4.2-C/F

Front fixing holes for screws M3

Weight: 12.7 g, unit: 500 pcs.

Type: 36051

**Ref. No.: 101489**



2GX11 surface-mounted lampholder

Casing: PBT GF, white, T140, nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Lateral pivots for bracket 105824 (see p. 195)

Base fixing holes for screws M4

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST4.2-C/F

Front fixing holes for screws M3

Weight: 13.7 g, unit: 500 pcs.

Type: 36020

**Ref. No.: 546609**



2GX11 surface-mounted lampholder

Casing: PBT GF, white, T140, nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Lateral pivots for bracket 105824 (see p. 195)

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST4.2-C/F

Front fixing holes for screws M3

Weight: 12.7 g, unit: 500 pcs.

Type: 36021

**Ref. No.: 546612**





# Lampholders and Accessories for TC Lamps

## 2G11 push-fit lampholder

Casing: PBT GF, white, T140, nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Lamp position: vertical

Rear fixing holes for self-tapping screws



acc. to ISO 1481/7049-ST4.2-C/F

Front fixing holes for screws M3

Weight: 14.3 g, unit: 500 pcs.

Type: 36052

**Ref. No.: 101491**

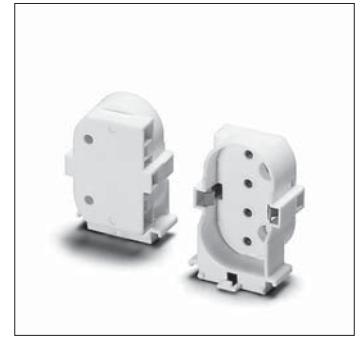

## 2G11 push-fit lampholder

Casing: PBT GF, white, T140, nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)

Push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)

Rear fixing holes for self-tapping screws

acc. to ISO 1481/7049-ST4.2-C/F


Front fixing holes for screws M3

Option for base wiring

Weight: 14.1 g, unit: 500 pcs.

Type: 36053

**Ref. No.: 101493**



## 2G11 push-fit lampholder

For the automatic luminaire wiring

Casing: PBT GF, white, T140

Nominal rating: 2/250

IDC terminals for leads H05V-U 0.5

The lampholder is wired in its horizontal position



before being brought into its vertical service position,

to assist lamp changes, it can be swiveled by 25°

Weight: 12 g, unit: 500 pcs.

Type: 36010

**Ref. No.: 500105**

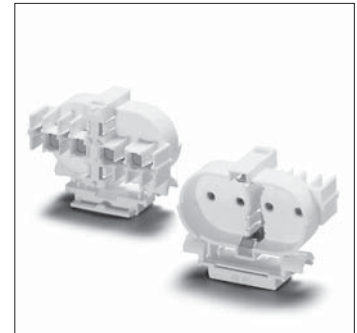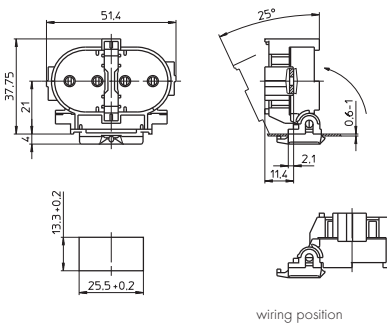

## 2G11 built-in lampholder

For the automatic luminaire wiring

Casing: PBT GF, white, T140

Nominal rating: 2/250

IDC terminals for leads H05V-U 0.5



Front and rear split pins

for wall thickness up to 1.2 mm

Weight: 10.5 g, unit: 500 pcs.

Type: 36011

**Ref. No.: 500106**

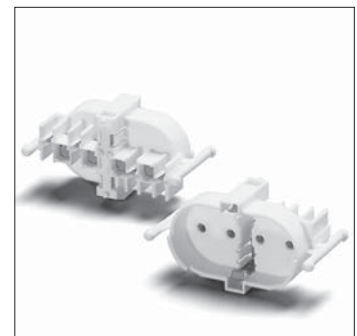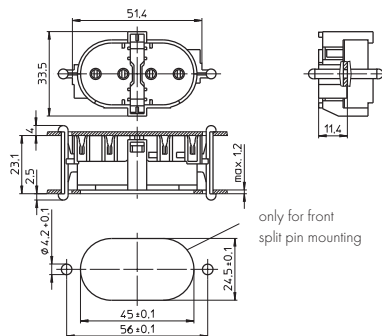

## Accessories

### For single-ended compact fluorescent lamps

The luminaire manufacturer is responsible for the right choice of accessories.

Cover caps for G24/GX24 lampholders (see p. 336-338)

Bracket

For G23 lampholder 101324 (see p. 190)

To swivel the lampholder when changing the lamp


Material: PC, white

Oblong holes for screws M4

Weight: 3.1 g, unit: 500 pcs.

Type: 97515

**Ref. No.: 105820**



Bracket

For 2G11 lampholders 101485 and 101489 (see p. 193)

To swivel the lampholder when changing the lamp

Material: PC, white

Oblong holes for screws M4


Base fixing holes for self-tapping screws

acc. to ISO 1481/7049-ST2.9-C/F

Weight: 3.7 g, unit: 500 pcs.

Type: 97516

**Ref. No.: 105824**



Lamp support for TC-D, TC-DEL lamps

Material: PC, white, UV-stabilised



Lamp position: 45°

Fixing foot with slot for screw M3.5

Weight: 1.5 g, unit: 500 pcs.

Type: 97031

**Ref. No.: 105448**



Lamp supports for TC-S, TC-SEL lamps

Height adjustable H: 17.5/20.5/23.5 mm

Push-fit foot for cut-out Ø 5.5 mm

for wall thickness up to 1 mm

Weight: 0.4/0.8/0.8 g, unit: 500 pcs.

Type: 35060


**Ref. No.: 105775** foot, PC, white

**Ref. No.: 105776** bracket, PC, crystal-clear,

UV-stabilised

**Ref. No.: 106416** bracket, PC, white,


UV-stabilised



# Lampholders and Accessories for TC Lamps


Lamp supports for TC-S, TC-SEL lamps  
 Height adjustable H: 27.5/30.5/33.5 mm  
 Push-fit foot for cut-out  $\varnothing$  5.5 mm  
 for wall thickness up to 1 mm  
 Weight: 0.7/0.8/0.8 g, unit: 500 pcs.  
 Type: 35061

- Ref. No.: 105931** foot, PC, white
- Ref. No.: 105776** bracket, PC, crystal-clear,  
UV-stabilised
- Ref. No.: 106416** bracket, PC, white,  
UV-stabilised




Lamp supports for TC-L lamps  
 Height adjustable H: 21/24/27 mm  
 Push-fit foot for cut-out  $\varnothing$  5.5 mm  
 for wall thickness up to 1 mm  
 Weight: 0.4/1.3/1.1 g, unit: 500 pcs.  
 Type: 35760

- Ref. No.: 105775** foot, PC, white
- Ref. No.: 105777** bracket, PC, crystal-clear,  
UV-stabilised
- Ref. No.: 106417** bracket, PC, white,  
UV-stabilised




Lamp supports for TC-L lamps  
 Height adjustable H: 31/34/37 mm  
 Push-fit foot for cut-out  $\varnothing$  5.5 mm  
 for wall thickness up to 1 mm  
 Weight: 0.7/1.3/1.1 g, unit: 500 pcs.  
 Type: 35761


- Ref. No.: 105931** foot, PC, white
- Ref. No.: 105777** bracket, PC, crystal-clear,  
UV-stabilised
- Ref. No.: 106417** bracket, PC, white,  
UV-stabilised



Lamp supports for TC-S, TC-SEL lamps  
 Material: stainless steel  
 Weight: 1.3 g, unit: 500 pcs.  
 Type: 93056 push-fit foot for  $\varnothing$  5.5 mm  
**Ref. No.: 509522**  
 Type: 93057 push-fit foot for 8.5x10.5 mm  
**Ref. No.: 509521**

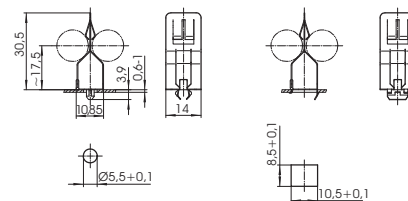


Lamp supports for TC-F, TC-L lamps  
 Material: stainless steel  
 Weight: 1.5 g, unit: 500 pcs.  
 Type: 93058 push-fit foot for  $\varnothing$  5.5 mm  
**Ref. No.: 509520**  
 Type: 93059 push-fit foot for 8.5x10.5 mm  
**Ref. No.: 509519**

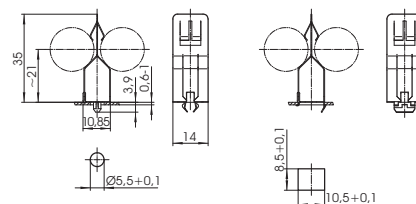

# Lampholders and Accessories for TC Lamps


Lamp supports for TC-F, TC-L lamps  
 For wall thickness 0.6-1 mm  
 Material: PC, white, UV-stabilised  
 Weight: 1.3 g, unit: 500 pcs.  
 Type: 97638 push-fit foot for  $\varnothing$  5.5 mm  
**Ref. No.: 105981**



1

2



Lamp support for TC-L lamps  
 Material: PC, white, UV-stabilised  
 Push-fit foot for cut-out  $\varnothing$  5.5 mm  
 for wall thickness up to 1 mm  
 Weight: 0.7 g, unit: 500 pcs.  
 Type: 36060  
**Ref. No.: 108878**



3

4

Lamp support for TC-L lamps  
 Material: PC, crystal-clear, UV-stabilised  
 Lockable  
 Base split pins for wall thickness 0.6-1 mm  
 Weight: 4 g, unit: 500 pcs.  
 Type: 36061  
**Ref. No.: 101497**

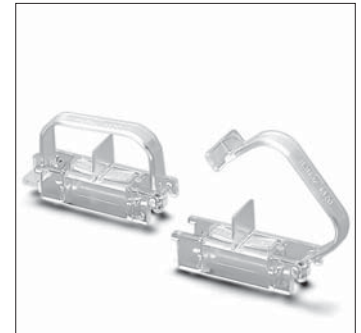

5

6

7

8

9

10

## GX53-1 Lampholders, Accessories

For single-ended compact fluorescent lamps with integrated ballasts

### GX53-1 lampholder

Casing: PC, white, T100, nominal rating: 2/250

Push-in terminals for through-wiring

for single-core leads: 0.5-1 mm<sup>2</sup>

for stranded leads:



0.75 mm<sup>2</sup>, tinned lead ends

Fixing holes for screws M3

Weight: 12.8 g, unit: 200 pcs.

Type: 11000

**Ref. No.: 530878**

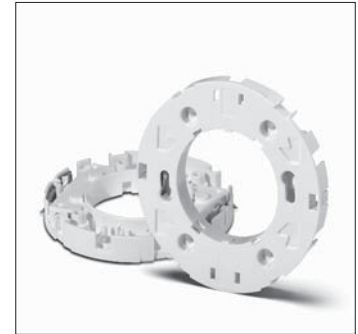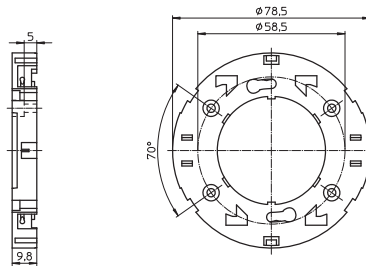

### GX53-1 lampholder

Fixing springs for installation into furniture panels

Casing: PC, white, T100, nominal rating: 2/250

Push-in terminals for through-wiring

for single-core leads: 0.5-1 mm<sup>2</sup>

for stranded leads:


0.75 mm<sup>2</sup>, tinned lead ends

Cut-out:  $\varnothing 78^{+0.2}$  mm

Weight: 13.2 g, unit: 200 pcs.

Type: 11010

**Ref. No.: 530879**

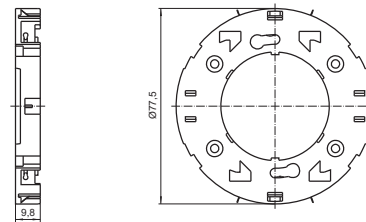

### Cord grip/cover plate for GX53-1 lampholders

For leads H03VH2-F 2X0.75, tinned lead ends


For luminaires of protection class II

Material: PC, white

Weight: 1.6 g, unit: 200 pcs.

Type: 97278

**Ref. No.: 504939**



### Surface-mounted installation ring

For wood or furniture panels

Material: PC, white

Weight: 10.4 g, unit: 100 pcs.

Type: 97277

**Ref. No.: 504938**



# Lampholders and Accessories for TC Lamps

Surface-mounted installation ring, flat


For built-in into furniture panels

Material: PC, white

Weight: 2.1 g, unit: 200 pcs.

Type: 97272

**Ref. No.: 504933**



1

2

Surface-mounted installation ring, high


For built-in into furniture panels

Material: PC, white

Weight: 5.7 g, unit: 100 pcs.

Type: 97281

**Ref. No.: 505118**



3

4

Surface-mounted installation ring


For built-in into furniture panels

Material: PC, transparent

Weight: 12.5 g, unit: 100 pcs.

Type: 97280

**Ref. No.: 505003**



5

6

7

8

9

10

## LAMPHOLDERS FOR T5, T8, T12 AND T2 LAMPS



## VS LAMPHOLDERS FOR DOUBLE- ENDED FLUORESCENT LAMPS

Vossloh-Schwabe's comprehensive range of lampholders for double-ended fluorescent lamps covers all major fixing methods. Push-through, push-fit and built-in lampholders with split pins or catches are available just as models with screw and push fittings.

High-grade materials for the contacts and thermoplastics for the casings guarantee reliable contacts and a long service life of the components.

Special G13 lampholders for the USA and Canada can be found under [www.unvlt.com](http://www.unvlt.com).



# 3

## Lampholders and Accessories for T Lamps

### G5 lampholders

G5 lampholders, accessories  
G5 twin lampholder  
G5 lampholders, degree of protection IP54/IP65/IP67  
2GX13 lampholders, accessories

### 202–209

202–206  
207  
207–208  
209

### G13 lampholders

G13 push-through lampholders  
G13 push-fit lampholders  
G13 push-fit twin lampholders, accessories  
G13 built-in lampholders  
G13 surface-mounted lampholders  
Accessories for T8 and T12 lamps  
G13 lampholders, degree of protection IP54/IP65/IP67, accessories  
G10q lampholders, accessories

### 210–229

210–212  
213–215  
216–217  
217–221  
221–222  
222–224  
225–229  
230

### W4.3 x 8.5d lampholders

### 231

### Technical details for fluorescent lamps

General technical details  
Glossary

### 243–271

394–401  
402–404

1

2

3

4

5

6

7

8

9

10




## G5 Lampholders, Accessories

### For fluorescent lamps T5 (T16)

Max. permitted temperature  $T_m$   
on the rear side of the lampholder: 110 °C


G5 push-through/surface-mounted lampholder  
Lamp axis push-through lampholder: 13.2 mm  
Lamp axis surface-mounted lampholder: 15.2 mm  
Casing: PC, white, T110  
Nominal rating: 2/500  
Push-in terminals: 0.5-1 mm<sup>2</sup>  
Lateral fixing clips for wall thickness 0.5-1.5 mm  
Fixing slot for screw M3  
Weight: 3.2 g, unit: 1000 pcs.  
Type: 09105

**Ref. No.: 100305**




G5 built-in lampholder  
Casing: PC, white, T110  
Nominal rating: 2/500  
Push-in terminals: 0.5-1 mm<sup>2</sup>  
Rear split pins for wall thickness up to 1.2 mm  
Weight: 2.6 g, unit: 1000 pcs.  
Type: 09205

**Ref. No.: 100310**

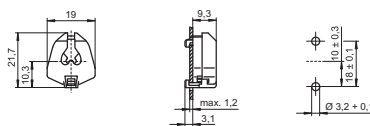

G5 built-in/push-fit lampholder  
Lamp axis: 12 mm  
Casing: PC, white, T110  
Nominal rating: 2/500  
Push-in terminals: 0.5-1 mm<sup>2</sup>  
Rear split pins for wall thickness up to 1.2 mm  
Base split pins for wall thickness up to 1 mm  
Weight: 2.9 g, unit: 1000 pcs.  
Type: 09210


**Ref. No.: 106455**

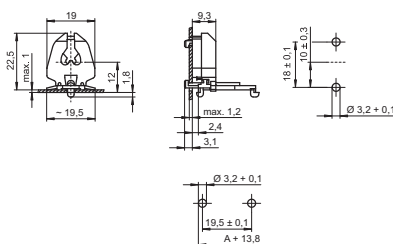

G5 push-through lampholders  
For the automatic luminaire wiring  
Casing: PBT GF, white, frontplate: PC, white  
Rotor: PBT GF, white, T140, lamp axis: 15 mm  
Nominal rating: 2/500  
IDC terminals for leads H05V-U 0.5  
Lateral fixing clips for wall thickness 0.5-1.5 mm  
Weight: 5 g, unit: 1000 pcs.  
Type: 09420/ 09421

**Ref. No.: 532377** with stop

**Ref. No.: 532378** without stop

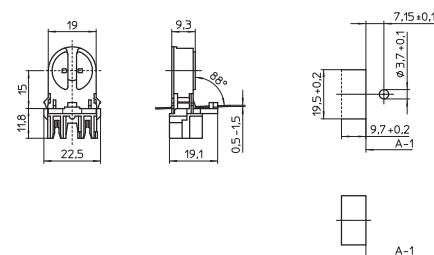

# Lampholders and Accessories for T Lamps

## G5 push-through lampholders

For the automatic luminaire wiring

Casing: PBT GF, white, frontplate: PC, white

Rotor: PBT GF, white, T140, lamp axis: 20 mm

Nominal rating: 2/500

IDC terminals for leads H05V-U 0.5


Lateral fixing clips for wall thickness 0.5–1.5 mm

Weight: 5.6 g, unit: 1000 pcs.

Type: 09422/09423

**Ref. No.: 532379** with stop

**Ref. No.: 532380** without stop

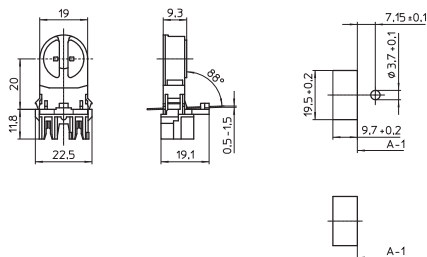

1

2

## G5 push-fit lampholder

For the automatic luminaire wiring

Lamp axis: 18 mm

Casing: PC, white, rotor: PBT GF, white, T130

Nominal rating: 2/500


IDC terminals for leads H05V-U 0.5

Lateral push-in twin terminals: 0.5–1 mm<sup>2</sup>

Weight: 5.5 g, unit: 1000 pcs.

Type: 09900

**Ref. No.: 534644**

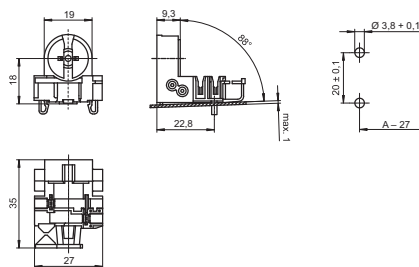

3

4

## G5 built-in lampholders

For the automatic luminaire wiring

Casing: PC, white, rotor: PBT GF, white, T130

Nominal rating: 2/500

IDC terminals for leads H05V-U 0.5

Rear split pins for wall thickness up to 1.2 mm


Weight: 3.7/4.1 g, unit: 1000 pcs.

Type: 09145

**Ref. No.: 501533**

Type: 09146 with spring adjustment

**Ref. No.: 501534**

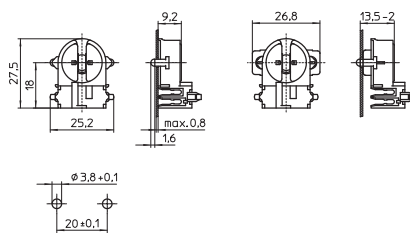

5

6

## G5 built-in lampholder

Casing: PBT GF, white, rotor: PBT GF, white

T140, nominal rating: 2/500


Push-in twin terminals: 0.5–1 mm<sup>2</sup>

Lateral fixing clips

Weight: 2.8 g, unit: 1000 pcs.

Type: 09404

**Ref. No.: 505732**



7

8

## G5 built-in lampholders

Casing: PBT GF, white, rotor: PBT GF, white

T140, nominal rating: 2/500

Push-in twin terminals: 0.5–1 mm<sup>2</sup>

Rear split pins for wall thickness up to 1.2 mm


Weight: 2.9/3.3 g, unit: 1000 pcs.

Type: 09405

**Ref. No.: 505733**

Type: 09406 with spring adjustment

**Ref. No.: 505734**

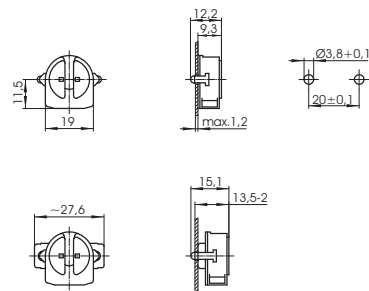

9


10

# Lampholders and Accessories for T Lamps

## G5 built-in lampholder

Lampholder thickness: 12.5 mm  
 Casing: PBT GF, white, rotor: PBT GF, white  
 T140, nominal rating: 2/500  
 Push-in twin terminals: 0.5–1 mm<sup>2</sup>  
 Rear split pins for wall thickness up to 1 mm  
 Weight: 3 g, unit: 1000 pcs.  
 Type: 09407

**Ref. No.: 508590**

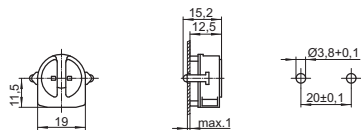


## G5 built-in lampholders

Casing: PBT GF, white, rotor: PBT GF, white  
 T140, nominal rating: 2/500  
 Push-in twin terminals: 0.5–1 mm<sup>2</sup>  
 Rear split pins for wall thickness up to 1.2 mm  
 Weight: 2.9/3.2 g, unit: 1000 pcs.  
 Type: 09415

**Ref. No.: 505735**

Type: 09416 with spring adjustment

**Ref. No.: 505736**

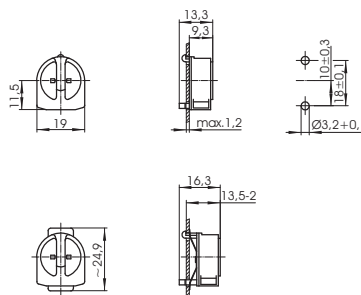


## G5 push-through lampholders

Lamp axis: 15 mm  
 Casing: PBT GF, white, rotor: PBT GF, white  
 T140, nominal rating: 2/500  
 Push-in twin terminals: 0.5–1 mm<sup>2</sup>  
 Lateral fixing clips for wall thickness 0.5–1.5 mm  
 Weight: 3.5/3.4 g, unit: 1000 pcs.  
 Type: 09420/09421

**Ref. No.: 505737** with stop

**Ref. No.: 505739** without stop

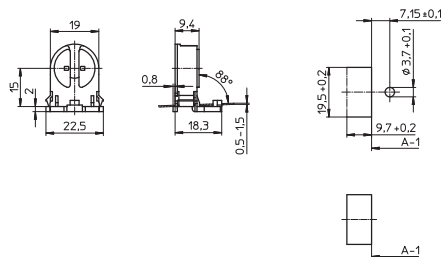


## G5 push-through lampholders

Lamp axis: 20 mm  
 Casing: PBT GF, white, rotor: PBT GF, white  
 T140, nominal rating: 2/500  
 Push-in twin terminals: 0.5–1 mm<sup>2</sup>  
 Lateral fixing clips for wall thickness 0.5–1.5 mm  
 Weight: 4.1 g, unit: 1000 pcs.  
 Type: 09432/09433

**Ref. No.: 545933** with stop

**Ref. No.: 545935** without stop

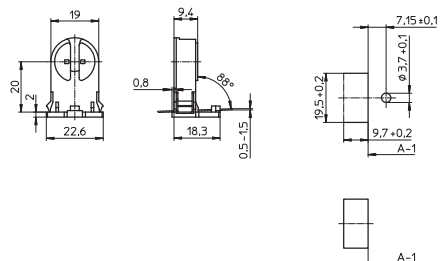


## G5 push-through lampholders

Lamp axis: 25 mm  
 Casing: PBT GF, white, rotor: PBT GF, white  
 T140, nominal rating: 2/500  
 Push-in twin terminals: 0.5–1 mm<sup>2</sup>  
 Lateral fixing clips for wall thickness 0.5–1.5 mm  
 Weight: 4.5 g, unit: 1000 pcs.  
 Type: 09434/09435

**Ref. No.: 545937** with stop

**Ref. No.: 545939** without stop

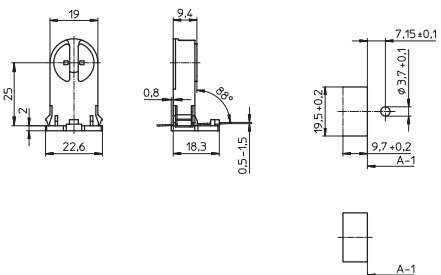

# Lampholders and Accessories for T Lamps

G5 push-through lampholders

Lamp axis: 35 mm

Casing: PBT GF, white, rotor: PBT GF, white

T140, nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.5-1.5 mm

Weight: 4.6 g, unit: 1000 pcs.

Type: 09426/09427

**Ref. No.: 505745** with stop

**Ref. No.: 505746** without stop

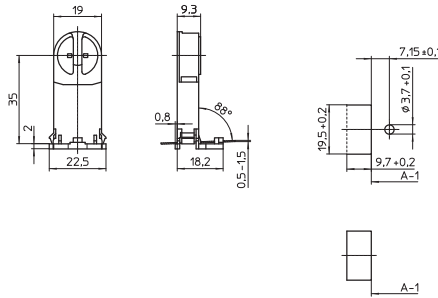

1

2

G5 push-fit lampholder

Lamp axis: 14 mm

Casing: PBT GF, white, rotor: PBT GF, white

T140, nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup>


Rear fixing clips for wall thickness 0.6-1 mm

Base or lateral wiring

Weight: 3.3 g, unit: 1000 pcs.

Type: 09440

**Ref. No.: 505747**



3

4

G5 push-fit lampholder

Lamp axis: 18 mm

Casing: PBT GF, white, rotor: PBT GF, white

T140, nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup>


Rear fixing clips for wall thickness 0.6-1 mm

Base or lateral wiring

Weight: 3.9 g, unit: 1000 pcs.

Type: 09446

**Ref. No.: 545894**



5

6

G5 push-fit lampholder

Lamp axis: 23 mm

Casing: PBT GF, white, rotor: PBT GF, white

T140, nominal rating: 2/500

Push-in twin terminals: 0.5-1 mm<sup>2</sup>


Rear fixing clips for wall thickness 0.6-1 mm

Base or lateral wiring

Weight: 4.2 g, unit: 1000 pcs.

Type: 09447

**Ref. No.: 545896**



7

8

G5 push-fit lampholder

Lamp axis: 15 mm

Casing: PBT GF, white, rotor: PBT GF, white

T140, nominal rating: 2/500


Push-in twin terminals: 0.5-1 mm<sup>2</sup>

Base split pins for wall thickness 0.6-1 mm

Weight: 3.4 g, unit: 1000 pcs.

Type: 09450

**Ref. No.: 505750**



9


10

# Lampholders and Accessories for T Lamps

## G5 push-fit lampholder

Lamp axis: 11.8 mm  
 Casing: PBT GF, white, rotor: PBT GF, white  
 T140, nominal rating: 2/500  
 Push-in twin terminals: 0.5-1 mm<sup>2</sup>  
 Base split pins for wall thickness up to 1 mm  
 Lateral wiring  
 Weight: 3.1 g, unit: 1000 pcs.  
 Type: 09460


**Ref. No.: 505751**



## G5 built-in/push-fit lampholder

Lamp axis: 11.8 mm  
 Casing: PBT GF, white, rotor: PBT GF, white  
 T140, nominal rating: 2/500  
 Push-in twin terminals: 0.5-1 mm<sup>2</sup>  
 Rear split pins for wall thickness up to 1.2 mm  
 Base split pins for wall thickness up to 1 mm  
 Lateral wiring  
 Weight: 3.2 g, unit: 1000 pcs.  
 Type: 09465


**Ref. No.: 508314**

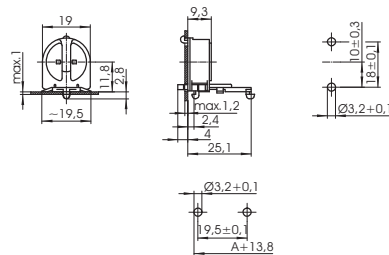

## G5 lampholder


For push-fit onto the lamp  
 Casing: PBT GF, white, T130  
 Nominal rating: 2/500  
 Push-in twin terminals: 0.5-1 mm<sup>2</sup>  
 Pin support for reliable contact  
 Lamp support 109685 (see below)  
 Weight: 3.7 g, unit: 1000 pcs.  
 Type: 09170

**Ref. No.: 109686**





Lamp support for lamps Ø 16 mm  
 Material: zinc-coated polished steel  
 Fixing hole for screw M3.5  
 Weight: 1.3 g, unit: 1000 pcs.  
 Type: 94088

**Ref. No.: 109685**



Lamp support for lamps Ø 16 mm  
 Material: PC, white, UV-stabilised  
 Push-fit foot for cut-out Ø 5.5 mm  
 Weight: 1 g, unit: 500 pcs.  
 Type: 84001

**Ref. No.: 500757**

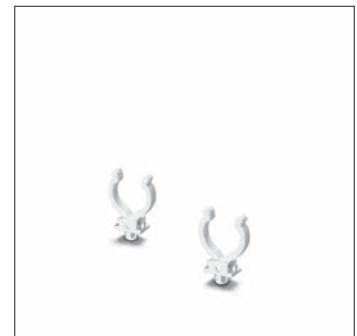


## G5 Twin Lampholder


For fluorescent lamps T5 (T16)

Max. permitted temperature  $T_m$   
on the rear side of the lampholder: 110 °C

G5 built-in lampholder  
Casing: PBT GF, white, rotor: PBT GF, white  
T140, nominal rating: 2/500  
Push-in twin terminals: 0.5-1 mm<sup>2</sup>  
Lateral fixing clips  
Weight: 2.8 g, unit: 1000 pcs.  
Type: 09404  
**Ref. No.: 505732**



Push-fit bracket  
For two G5 built-in lampholders 505732  
Material: PC, white  
Lamp axis: 20 mm  
Distance between two lamp axes: 24 mm  
Push-fit foot for wall thickness 0.5-1 mm  
Weight: 3.5 g, unit: 1000 pcs.  
Type: 97677  
**Ref. No.: 507562**




## G5 Lampholders, Degree of Protection IP54/IP65/IP67

For fluorescent lamps T5 (T16)  
For luminaires of protection class I and II

Lampholders protected against dust and splashing water (IP54)  
Lampholders protected against dust and jet of water (IP65)  
Dust and watertight lampholders (IP67)

Pin support for reliable contact  
With spring adjustment  
Max. permitted temperature  $T_m$   
on the rear side of the lampholder: 110 °C


G5 push-fit lampholder for metal casing  
Casing: PC, white, interior part: PBT GF  
T140, nominal rating: 2/500  
Push-in twin terminals: 0.5-1 mm<sup>2</sup>  
Push-fit foot for wall thickness: 1.4-2 mm  
Weight: 11.3 g, unit: 250 pcs.  
Type: 84101 system 153  
**Ref. No.: 529832**



# Lampholders and Accessories for T Lamps

G5 push-fit lampholder for plastic casing  
 Casing: PC, white, interior part: PBT GF  
 T140, nominal rating: 2/500  
 Push-in twin terminals: 0.5-1 mm<sup>2</sup>  
 Push-fit foot for wall thickness: 0.4-1 mm  
 Weight: 11.6 g, unit: 250 pcs.  
 Type: 84104 system 154

**Ref. No.: 530535**

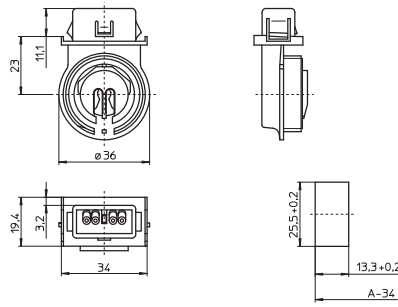

Foot gaskets for systems 153 and 154  
 Weight: 0.5/0.7/0.7 g  
 Unit: 1000 pcs.

Type: 98002 degree of protection IP67




**Ref. No.: 108947** material: PE foam

Type: 98087 degree of protection IP67

**Ref. No.: 503773** material: EPDM, black

Type: 98003 degree of protection IP54

**Ref. No.: 108266** material: EPDM, black

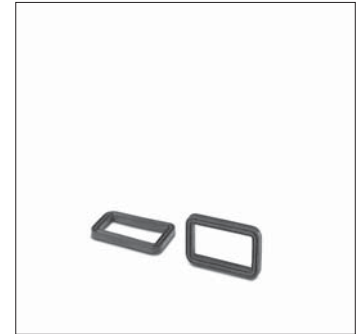

G5 push-fit lampholder

Casing: PC, white, interior part: PBT GF

T140, nominal rating: 2/500


Push-in twin terminals: 0.5-1 mm<sup>2</sup>

Push-fit foot for wall thickness: 1.4-2 mm

Weight: 12.7 g, unit: 250 pcs.

Type: 84108 system 151

**Ref. No.: 534073**



Foot gaskets for system 151

Weight: 1/1.1/1.1 g

Unit: 1000 pcs.

Type: 98004 degree of protection IP65




**Ref. No.: 108267** material: cellular rubber, black

Type: 98011 degree of protection IP67

**Ref. No.: 504078** material: silicone, transparent

Type: 98008 degree of protection IP67

**Ref. No.: 546254** profiled foot gasket, material: EPDM, black

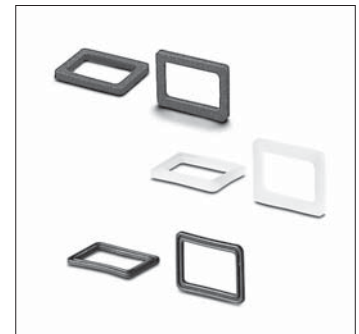


Screw ring for systems 151, 153 and 154

Ring: PBT GF, white, gasket: silicone

Weight: 11.8 g, unit: 250 pcs.

Type: 84103

**Ref. No.: 529836**




## 2GX13 Lampholders, Accessories

For fluorescent lamps T-R5 (T-R16)


2GX13 push-fit lampholder  
 Lamp axis: 15 mm  
 Casing: PC, white, T110  
 Nominal rating: 2/500  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Base push-fit studs for wall thickness up to 1.2 mm  
 Weight: 10 g, unit: 500 pcs.  
 Type: 58110

**Ref. No.: 546656**

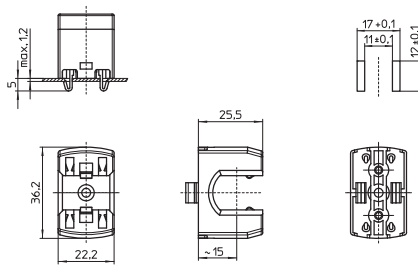


2GX13 surface-mounted lampholder  
 Lamp axis: 15 mm  
 Casing: PC, white, T110  
 Nominal rating: 2/500  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Rear fixing holes for self-tapping screws acc. to ISO 1481/7049-ST2.9-C/F  
 Lateral fixing holes for screws M3  
 Weight: 10.6 g, unit: 500 pcs.  
 Type: 58100

**Ref. No.: 546655**

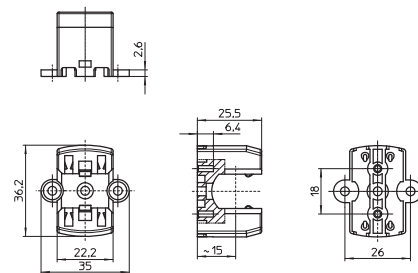



Lamp support for lamps Ø 16 mm  
 Material: PC, white, UV-stabilised  
 Fixing hole for screw M3  
 Fixing hole for self-tapping screw acc. to ISO 1481/7049-ST4.2-C/F  
 Weight: 1 g, unit: 500 pcs.  
 Type: 84000

**Ref. No.: 109532**



Lamp support for lamps Ø 16 mm  
 Material: PC, white, UV-stabilised  
 Push-fit foot for cut-out Ø 5.5 mm  
 Weight: 1 g, unit: 500 pcs.  
 Type: 84001

**Ref. No.: 500757**

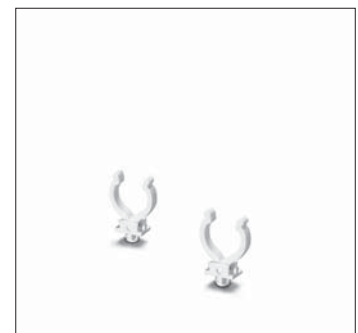

1

2

3

4

5

6

7

8

9

10



## G13 Push-through Lampholders

### For fluorescent lamps T8 (T26), T12 (T38)

Lampholders with integrated starter holder have push-in twin terminals for the lamp circuit and push-in terminals for the starter circuit.  
Pin support for reliable contact  
Max. permitted temperature  $T_m$  on the rear side of the lampholder: 110 °C


G13 push-through lampholders for lamps T8 and T12

Lamp axis: 23 mm  
Casing: PC, white, frontplate: PBT GF, white T140, nominal rating: 2/500  
Push-in terminals: 0.5-1 mm<sup>2</sup>  
Lateral fixing clips for wall thickness 0.4-2 mm  
Weight: 6 g, unit: 1000 pcs.

Type: 27700/27701

**Ref. No.: 109330** with stop

**Ref. No.: 109331** without stop

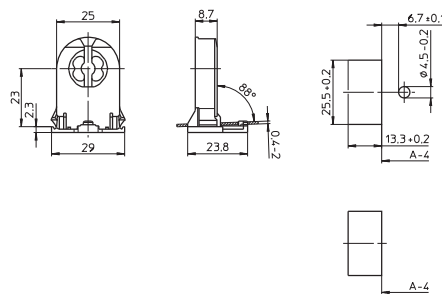


G13 Rotoclic push-through lampholders

for lamps T8 and T12  
Lamp axis: 23 mm  
Casing: PC, white, frontplate: PBT GF, white T140, nominal rating: 2/500  
Push-in terminals: 0.5-1 mm<sup>2</sup>  
Lateral fixing clips for wall thickness 0.4-2 mm  
Weight: 6.8 g, unit: 1000 pcs.

Type: 27700/27701

**Ref. No.: 546641** with stop

**Ref. No.: 546642** without stop

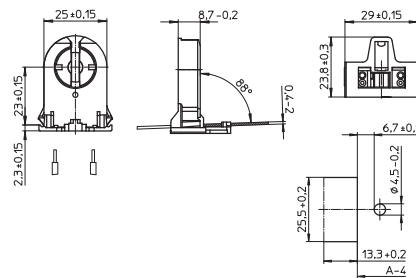


G13 push-through lampholders for lamps T8

With starter attachment  
Lamp axis: 23 mm  
Casing: PC, white, frontplate: PBT GF, white T140, nominal rating: 2/500  
Push-in terminals: 0.5-1 mm<sup>2</sup>  
Lateral fixing clips for wall thickness 0.4-2 mm  
Weight: 10.4 g, unit: 500 pcs.

Type: 27800/27801

**Ref. No.: 109332** with stop

**Ref. No.: 109335** without stop

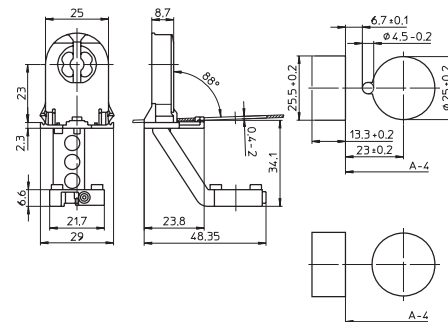


G13 Rotoclic push-through lampholders

for lamps T8, with starter attachment  
Lamp axis: 23 mm  
Casing: PC, white, frontplate: PBT GF, white T140, nominal rating: 2/500  
Push-in terminals: 0.5-1 mm<sup>2</sup>  
Lateral fixing clips for wall thickness 0.4-2 mm  
Weight: 10.4 g, unit: 500 pcs.

Type: 27800/27801

**Ref. No.: 546647** with stop

**Ref. No.: 546648** without stop

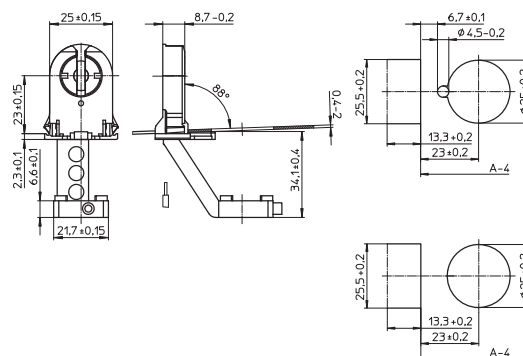

# Lampholders and Accessories for T Lamps

G13 push-through lampholders for lamps T8, T12

Lamp axis: 17 mm

Casing: PC, white, frontplate: PBT GF, white

T140, nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.4-2 mm

Weight: 5,4 g, unit: 1000 pcs.

Type: 26300/26310

**Ref. No.: 551271** with stop

**Ref. No.: 551272** without stop

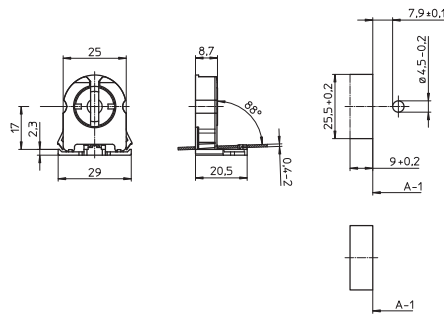

1

2

G13 push-through lampholders for lamps T8 and T12

With starter attachment

Lamp axis: 22.5 mm

Casing: PC, white, rotor: PBT, white

T130, nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.6-2 mm

Weight: 9.5 g, unit: 500 pcs.

Type: 27820/27821

**Ref. No.: 100579** with stop

**Ref. No.: 100581** without stop

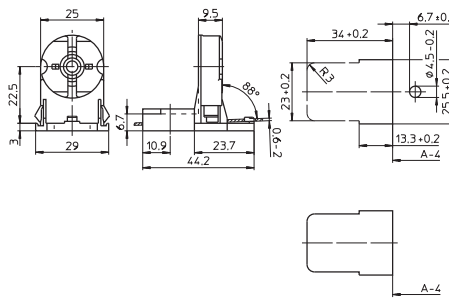

3

4

G13 push-through lampholders for lamps T8 and T12

Lamp axis: 31 mm

Casing: PC, white, frontplate: PBT GF, white

T140, nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.4-2 mm

Weight: 7.8 g, unit: 1000 pcs.

Type: 28500/28501

**Ref. No.: 109338** with stop

**Ref. No.: 109339** without stop

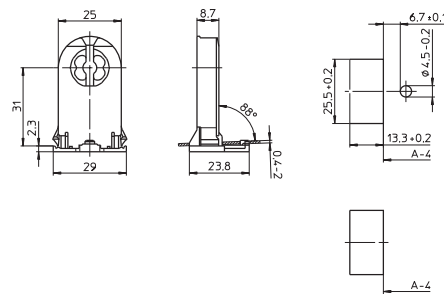

5

6

G13 push-through lampholders for lamps T8 and T12

With starter attachment

Lamp axis: 31 mm

Casing: PC, white, frontplate: PBT GF, white

T140, nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.4-2 mm

Weight: 10.3/10.1 g, unit: 500 pcs.

Type: 28600/28601

**Ref. No.: 109340** with stop

**Ref. No.: 109341** without stop

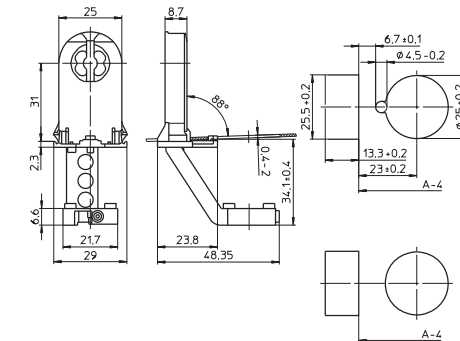

7

8

G13 push-through lampholders for lamps T8 and T12

Lamp axis: 31 mm

Casing: PC, white, rotor: PBT GF, white

T130, nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.6-2 mm

Weight: 9.6 g, unit: 500 pcs.

Type: 28740/28741

**Ref. No.: 542983** with stop

**Ref. No.: 542984** without stop

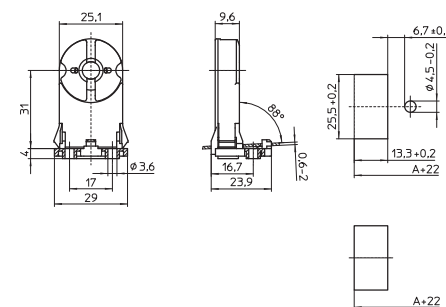

9

10

# Lampholders and Accessories for T Lamps

G13 push-through lampholders for lamps T8 and T12

Lamp axis: 31 mm

Casing: PC, white, rotor: PBT, white

T130, nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.6-2 mm

Weight: 9.9 g, unit: 1000 pcs.

Type: 28500/28501

**Ref. No.: 100591** with stop

**Ref. No.: 100593** without stop

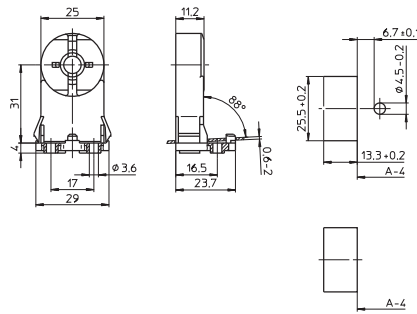

G13 push-through lampholders for lamps T8 and T12

For the automatic luminaire wiring

Lamp axis: 23 mm

Casing: PC, white, frontplate: PBT GF, white

T140, nominal rating: 2/500

IDC terminals for leads H05V-U 0.5


Lateral fixing clips for wall thickness 0.4-2 mm

Weight: 7.7/7.5 g, unit: 1000 pcs.

Type: 27780/27781

**Ref. No.: 526019** with stop

**Ref. No.: 526020** without stop

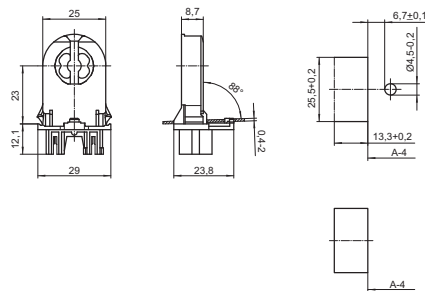

G13 push-through lampholders for lamps T8 and T12

For the automatic luminaire wiring

Lamp axis: 31 mm

Casing: PC, white, frontplate: PBT GF, white

T140, nominal rating: 2/500

IDC terminals for leads H05V-U 0.5


Lateral fixing clips for wall thickness 0.4-2 mm

Weight: 8.8/8.6 g, unit: 1000 pcs.

Type: 28580/28581

**Ref. No.: 526021** with stop

**Ref. No.: 526022** without stop

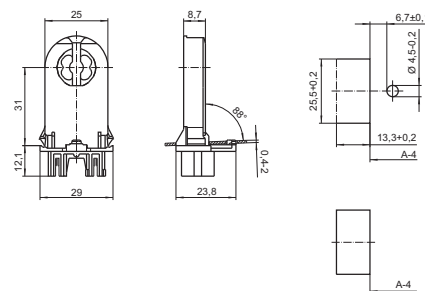


## G13 Push-fit Lampholders

### For fluorescent lamps T8 (T26), T12 (T38)


Lampholders with integrated starter holder are equipped with big rotor and have push-in twin terminals for the lamp circuit and push-in terminals for the starter circuit. Pin support for reliable contact

Casing: PC, white, frontplate/rotor: PBT GF, white  
 Max. permitted temperature  $T_m$  on the rear side of the lampholder: 110 °C  
 T-Marking acc. to IEC  
 IP50 version: push-fit foot with gasket


G13 Rotoclic push-fit lampholders for lamps T8 and T12 T140, nominal rating: 2/500, suitable for Top Test  
 Lateral push-in terminals: 0.5-1 mm<sup>2</sup>  
 Push-fit foot for luminaire cut-out 13.3x25.5 mm with wall thickness 0.6-1 mm  
 Lampholder foot/luminaire: IP40 (537135: IP50)  
 Weight: 5.9/5.9/6/6 g, unit: 1000 pcs.  
 Type: 24100/24110/24170/24150  
**Ref. No.: 537132** lamp axis H: 25 mm  
**Ref. No.: 537135** lamp axis H: 25 mm, IP50  
**Ref. No.: 537150** lamp axis H: 21 mm  
**Ref. No.: 537144** lamp axis H: 18 mm

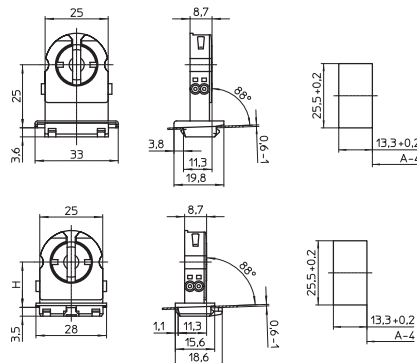


G13 push-fit lampholders with starter attachment for lamps T8 and T12, lamp axis H: 25 mm T130, nominal rating: 2/500  
 Lateral push-in terminals: 0.5-1 mm<sup>2</sup>  
 Push-fit foot for luminaire cut-out 13.3x25.5 mm with wall thickness 0.6-1 mm  
 Lampholder foot/luminaire: IP40 (100540: IP50)  
 Weight: 10.4/12 g, unit: 1000/500 pcs.  
 Type: 27200/27201  
**Ref. No.: 100536** IP40  
**Ref. No.: 100540** IP50

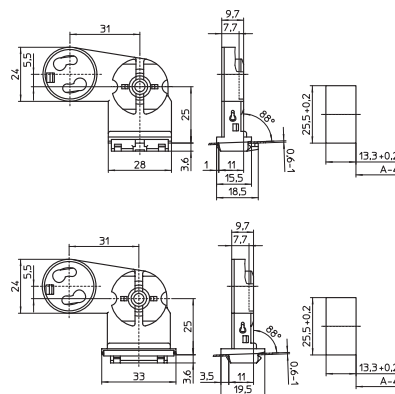

G13 Rotoclic push-fit lampholders for lamps T8 and T12 T140, nominal rating: 2/500, suitable for Top Test  
 Lateral push-in terminals: 0.5-1 mm<sup>2</sup>  
 Push-fit foot for luminaire cut-out 10x20 mm with wall thickness 0.6-1 mm  
 Lampholder foot/luminaire: IP40  
 Weight: 5.7/6 g, unit: 1000 pcs.  
 Type: 24120/24160  
**Ref. No.: 537138** lamp axis H: 25 mm  
**Ref. No.: 537147** lamp axis H: 21 mm

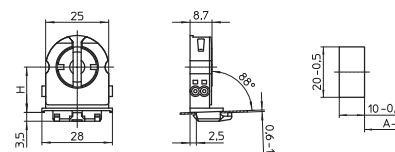

G13 push-fit lampholders for lamps T8 Lamp axis: 18 mm T130, nominal rating: 2/500  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Push-fit feet for luminaire cut-out 13.3x25.5 mm with wall thickness 0.7 mm  
 Weight: 6 g, unit: 1000 pcs.  
 Type: 27151  
**Ref. No.: 100532**

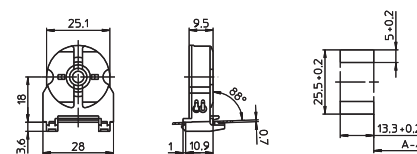

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

# Lampholders and Accessories for T Lamps

G13 Rotoclic push-fit lampholders for lamps T8

T140, nominal rating: 2/500

Base push-in terminals: 0.5–1 mm<sup>2</sup>

Base split pins for wall thickness up to 1.2 mm


Lampholder foot/luminaire: IP40

Weight: 5.9/5.7 g, unit: 1000 pcs.

Type: 24360/24350

**Ref. No.: 537155** lamp axis H: 30 mm

**Ref. No.: 537153** lamp axis H: 23.5 mm

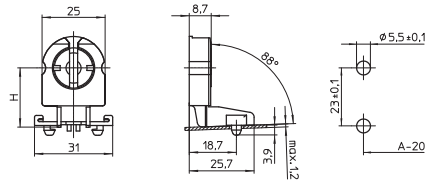

G13 Rotoclic push-fit lampholders for lamps T8

T140, nominal rating: 2/500

Suitable for Top Test

Lateral push-in terminals: 0.5–1 mm<sup>2</sup>

Base split pins for wall thickness up to 1.2 mm

Lampholder foot/luminaire: IP40


Weight: 6/5.8/5.3 g, unit: 1000 pcs.

Type: 23360/23350/23370

**Ref. No.: 537160** lamp axis H: 30 mm

**Ref. No.: 537157** lamp axis H: 23.5 mm

**Ref. No.: 539128** lamp axis H: 18 mm

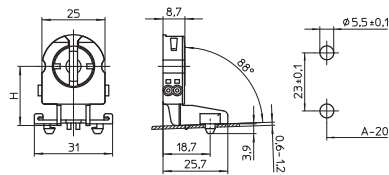

G13 push-fit lampholders with starter attachment for lamps T8

T130, nominal rating: 2/250

Base push-in terminals: 0.5–1 mm<sup>2</sup>

Base split pins for wall thickness up to 1.2 mm



Lampholder foot/luminaire: IP40

Weight: 9.7/9.5 g, unit: 1000 pcs.

Type: 27460/27450

**Ref. No.: 100559** lamp axis H: 30 mm

**Ref. No.: 100557** lamp axis H: 23.5 mm

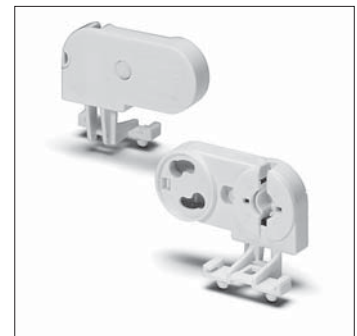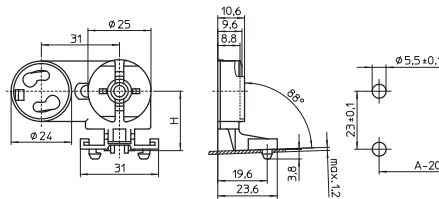

G13 push-fit lampholders for lamps T8 and T12

Lamp axis H: 25 mm

T130, nominal rating: 2/500

Base push-in terminals: 0.5–1 mm<sup>2</sup>

Push-fit foot for luminaire cut-out 13.3x25.5 mm with wall thickness 0.5–1 mm


Lampholder foot/luminaire: IP40

Weight: 5/11 g, unit: 500 pcs.

Type: 28100/28200

**Ref. No.: 100585**

**Ref. No.: 100588** with starter attachment

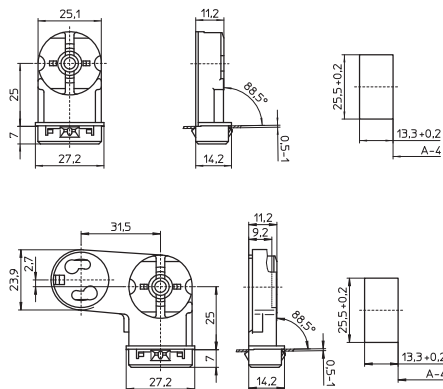

# Lampholders and Accessories for T Lamps

G13 push-fit lampholder for lamps T8

For the automatic luminaire wiring

Lamp axis: 21 mm

T130, nominal rating: 2/250

IDC terminals for leads H05V-U 0.5


Base split pins for wall thickness up to 1 mm

The lampholder is wired in its horizontal position before being brought into its vertical service position

Weight: 6.7 g, unit: 1000 pcs.

Type: 48230

**Ref. No.: 108730**



1

2

G13 push-fit lampholder for lamps T8

For the automatic luminaire wiring

Lamp axis: 31 mm

T130, nominal rating: 2/500



IDC terminals for leads H05V-U 0.5

Base split pins for wall thickness up to 1 mm

Weight: 7.2 g, unit: 1000 pcs.

Type: 28310

**Ref. No.: 506007**

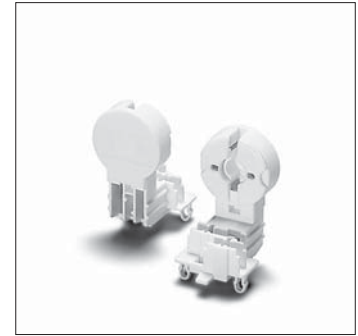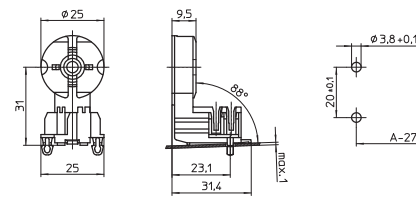

3

4

G13 push-fit lampholder for lamps T8

For the automatic luminaire wiring

Lamp axis: 26.5 mm

T130, nominal rating: 2/500


IDC terminals for leads H05V-U 0.5

Base split pins for wall thickness up to 1 mm

Weight: 7.1 g, unit: 1000 pcs.

Type: 28315

**Ref. No.: 504202**

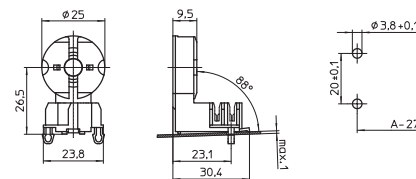

5

6

G13 push-fit lampholder for lamps T8

For the automatic luminaire wiring

Lamp axis: 31 mm

T130, nominal rating: 2/500

IDC terminals for leads H05V-U 0.5

Lateral push-in twin terminals: 0.5-1 mm<sup>2</sup>


Base split pins for wall thickness up to 1 mm

Front cable holder for up to 3 individual conductors

Weight: 8 g, unit: 1000 pcs.

Type: 28330

**Ref. No.: 508423**

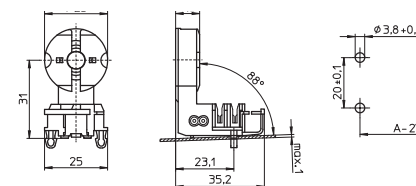

7

8

G13 push-fit lampholders

Lamp axis: 25 mm

T130, nominal rating: 5/500

Lateral and base push-in terminals: 0.5-1 mm<sup>2</sup>

Push-fit foot for luminaire cut-out 10x20 mm

for wall thickness 0.4-1 mm

Weight: 6/8.5 g, unit: 500 pcs.

Type: 28921/28920


**Ref. No.: 108438**

for lamps T8 and T12

**Ref. No.: 108437**

for lamps T8

with starter attachment

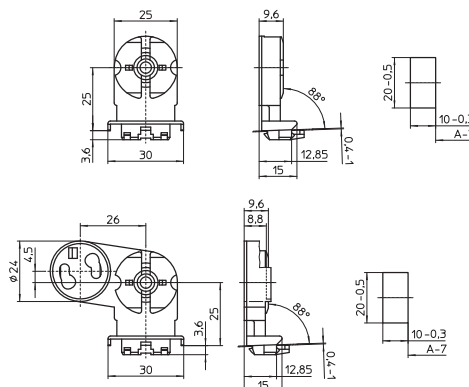

9

10



## G13 Push-fit Twin Lampholders, Accessories


### For fluorescent lamps T8 (T26), T12 (T38)

Casing: PC, white, rotor: PBT GF, white  
 Pin support for reliable contact  
 Max. permitted temperature  $T_m$   
 on the rear side of the lampholder: 110 °C

G13 twin lampholder for lamps T8

Lamp axis: 22 mm  
 Distance between two lamp axes: 50 mm  
 T130, nominal rating: 2/500  
 Base wiring  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Push-fit foot for wall thickness 1 mm  
 Weight: 14 g, unit: 400 pcs.  
 Type: 22900

**Ref. No.: 108984**

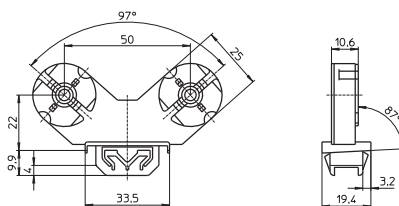

G13 twin lampholders for lamps T8 and T12

Lamp axis: 25 mm  
 Distance between two lamp axes: 76 mm  
 T130, nominal rating: 2/500  
 Base push-in twin terminals: 0.5-1 mm<sup>2</sup> (lamp circuit)  
 Base push-in terminals: 0.5-1 mm<sup>2</sup> (starter circuit)  
 Push-fit foot for wall thickness 0.6-1 mm  
 Weight: 21 g, unit: 200/500 pcs.  
 Type: 22604/22602 without starter attachment


**Ref. No.: 108816** with stop

**Ref. No.: 100487** without stop

Type: 22600/22601 with starter attachment

**Ref. No.: 100484** with stop

**Ref. No.: 100486** without stop

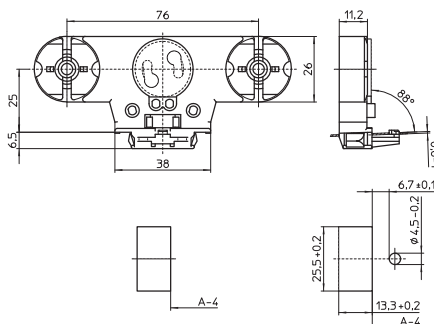


G13 twin lampholders for lamps T8 and T12

Lamp axis: 31.5 mm  
 Distance between two lamp axes: 76 mm  
 T130, nominal rating: 2/500  
 For wiring inserts 108777/108778  
 and 545261/545262  
 Weight: 17 g, unit: 250 pcs.

Type: 22800/22801

**Ref. No.: 108773** with starter attachment

**Ref. No.: 108775** without starter attachment

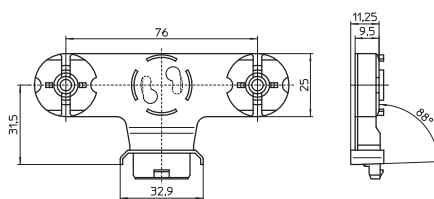

Wiring inserts with push-fit foot

For G13 twin lampholders 108773/108775

Material: PC, white

Push-in terminals: 0.5 mm<sup>2</sup>

For the automatic luminaire wiring:


IDC terminals for leads H05V-U 0.5

Weight: 5.3 g, unit: 500 pcs.

Type: 22850/22851

**Ref. No.: 108777** with stop

**Ref. No.: 108778** without stop



# Lampholders and Accessories for T Lamps

Wiring inserts with push-fit foot

For G13 twin lampholders 108773/108775

Material: PC, white


Push-in terminals: 0.5-1 mm<sup>2</sup>

Weight: 4.4 g, unit: 500 pcs.

Type: 22860/22861

**Ref. No.: 545261** with stop

**Ref. No.: 545262** without stop



1

2

## G13 Built-in Lampholders

### For fluorescent lamps T8 (T26), T12 (T38)

Lampholders with integrated starter holder are equipped with big rotor and have push-in twin terminals for the lamp circuit and push-in terminals for the the starter circuit.

Pin support for reliable contact (except for type 485)

Casing: PC, white, frontplate/rotor: PBT GF, white

Max. permitted temperature  $T_m$

on the rear side of the lampholder: 110 °C

T-Marking acc. to IEC

G13 built-in lampholders for lamps T8 and T12

Lampholder thickness: 13 mm

T140, nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>


Rear split pins for wall thickness up to 1.2 mm

Weight: 4.6/5.4 g, unit: 1000 pcs.

Type: 47105/47106

**Ref. No.: 509152**

**Ref. No.: 509154** with spring adjustment

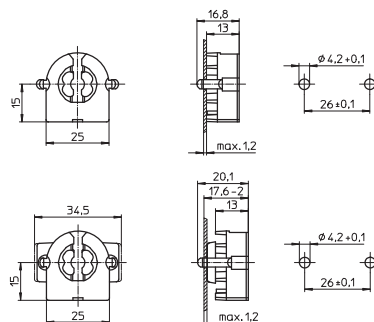

5

6

G13 built-in lampholders for lamps T8 and T12

Lampholder thickness: 9.5 mm

T140, nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>


Rear split pins for wall thickness up to 1.2 mm

Weight: 4.4/5.1 g, unit: 1000 pcs.

Type: 47505/47506

**Ref. No.: 509162**

**Ref. No.: 509164** with spring adjustment

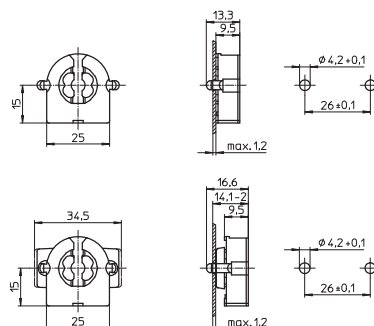

7

8

G13 built-in lampholder for lamps T8 and T12

Lampholder thickness: 10.5 mm


T140, nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>

Weight: 4.6 g, unit: 1000 pcs.

Type: 47304

**Ref. No.: 509156**



9

10



# Lampholders and Accessories for T Lamps

G13 Rotoclic built-in lampholders for lamps T8 and T12  
T140, nominal rating: 2/500

Base push-in terminals: 0.5-1 mm<sup>2</sup>


Fixing holes  $\varnothing$  3.2 mm

Weight: 5 g, unit: 1000 pcs.

Type: 49100/49500

**Ref. No.: 537165** lampholder thickness: 13 mm

**Ref. No.: 537173** lampholder thickness: 9.5 mm



G13 built-in lampholders with spring adjustment

for lamps T8 and T12

T130, nominal rating: 2/500

Base push-in terminals: 0.5-1 mm<sup>2</sup>


Fixing holes for screws M3

Weight: 6/5.5 g, unit: 1000 pcs.

Type: 47102/47502

**Ref. No.: 101681** lampholder thickness: 13 mm

**Ref. No.: 101740** lampholder thickness: 9.5 mm



G13 Rotoclic built-in lampholders for lamps T8 and T12

T140, nominal rating: 2/500

Lateral push-in terminals: 0.5-1 mm<sup>2</sup>

Suitable for Top Test


Fixing holes  $\varnothing$  3.2 mm

Weight: 5/4.7 g, unit: 1000 pcs.

Type: 59100/59500

**Ref. No.: 537181** lampholder thickness: 13 mm

**Ref. No.: 537205** lampholder thickness: 9.5 mm



G13 built-in lampholders with starter attachment

for lamps T8 and T12

T130, nominal rating: 2/500

Base push-in terminals: 0.5-1 mm<sup>2</sup>

Fixing holes for screws M3

Weight: 8.7/10.3/8 g, unit: 1000 pcs.


Type: 47200/47402 lampholder thickness: 13 mm

**Ref. No.: 101706**

**Ref. No.: 101708** with spring adjustment

Type: 47600 lampholder thickness: 9.5 mm

**Ref. No.: 101765**

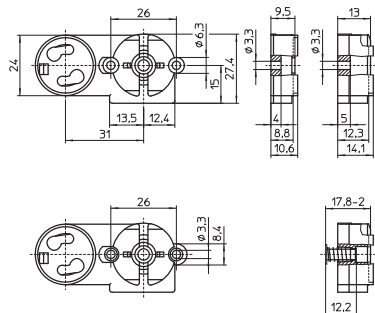

G13 Rotoclic built-in lampholders for lamps T8 and T12

T140, nominal rating: 2/500

Base push-in terminals: 0.5-1 mm<sup>2</sup>

Rear split pins for wall thickness up to 1.2 mm

Weight: 5.1/5.9/5/5.5 g, unit: 1000 pcs.

Type: 49105/49106 lampholder thickness: 13 mm


**Ref. No.: 537166**

**Ref. No.: 537167** with spring adjustment

Type: 49505/49506 lampholder thickness: 9.5 mm

**Ref. No.: 537174**

**Ref. No.: 537175** with spring adjustment

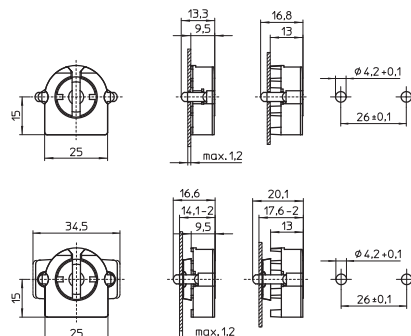

# Lampholders and Accessories for T Lamps

G13 Rotoclic built-in lampholders for lamps T8 and T12  
T140, nominal rating: 2/500

Lateral push-in terminals: 0.5-1 mm<sup>2</sup>, suitable for Top Test  
Rear split pins for wall thickness up to 1.2 mm  
Weight: 5.1/5.9/5/5.5 g, unit: 1000 pcs.

Type: 59105/59106 lampholder thickness: 13 mm


**Ref. No.: 537182**

**Ref. No.: 537183** with spring adjustment

Type: 59505/59506 lampholder thickness: 9.5 mm

**Ref. No.: 537206**

**Ref. No.: 537207** with spring adjustment

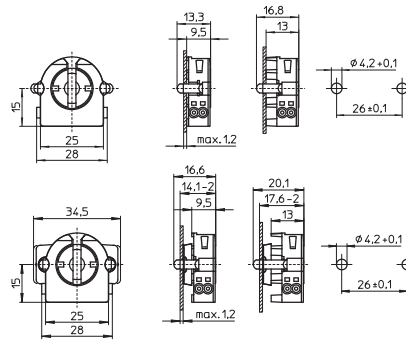

1

2

G13 built-in lampholders with starter attachment  
for lamps T8 and T12, T130, nominal rating: 2/500  
Base push-in terminals: 0.5-1 mm<sup>2</sup>

Rear split pins for wall thickness up to 1.2 mm  
Weight: 9/9.5/8/8.5 g, unit: 1000 pcs.

Type: 47205/47206 lampholder thickness: 13 mm



**Ref. No.: 101712**

**Ref. No.: 101716** with spring adjustment

Type: 47605/47606 lampholder thickness: 9.5 mm

**Ref. No.: 101769**

**Ref. No.: 101773** with spring adjustment

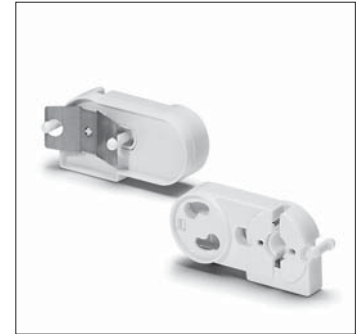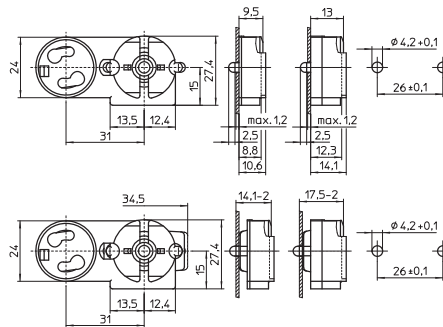

3

4

G13 built-in lampholders for lamps T8

For the automatic luminaire wiring  
T130


Nominal rating: 2/500, lampholder thickness:  
10.5 mm, IDC terminals for leads H05V-U 0.5  
Rear split pins for wall thickness up to 1.2 mm

Weight: 5/5.5 g, unit: 1000 pcs.

Type: 48205/48206

**Ref. No.: 507133**

**Ref. No.: 507134** with spring adjustment

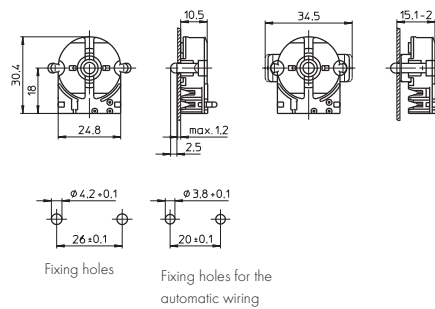

5

6

G13 built-in lampholder for lamps T8 and T12

Lampholder thickness: 10.7 mm

T130

Nominal rating: 2/500


Push-in terminals: 0.5-1 mm<sup>2</sup>

Lateral fixing clips

Weight: 4.7 g, unit: 1000 pcs.

Type: 47504

**Ref. No.: 101745**



7

8

G13 lampholder

For push-fitting onto lamps T12

Lampholder thickness: 9.5 mm

Casing: PC, white, T110

Front cover plate: PBT GF, white

Nominal rating: 2/250


Push-in terminals: 0.5-1 mm<sup>2</sup>

Fixing holes for screws M3

Weight: 10.5 g, unit: 1000 pcs.

Type: 47700

**Ref. No.: 101781**



9


10

# Lampholders and Accessories for T Lamps

## G13 lampholder

For push-fitting onto lamps T8  
 Lampholder thickness: 9.5 mm  
 Casing: PC, white, T110  
 Front cover plate: PBT GF, white  
 Nominal rating: 2/500  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Fixing hole for screw M3  
 Weight: 5.3 g, unit: 1000 pcs.  
 Type: 47900


**Ref. No.: 101784**

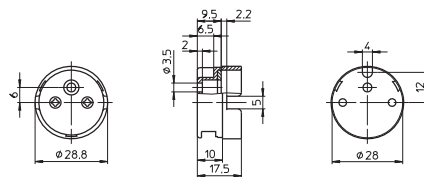

## G13 lampholder with starter attachment

For push-fitting onto lamps T8  
 Lampholder thickness: 9.5 mm  
 Casing: PC, white, T110  
 Front cover plate: PBT GF, white  
 Nominal rating: 2/250  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Fixing hole for screw M3  
 Weight: 8.1 g, unit: 1000 pcs.  
 Type: 47920



**Ref. No.: 101785**

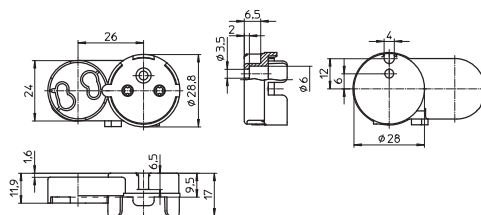

## Endbox with integrated G13 lampholder

for lamps T8 and T12  
 For recessed luminaires in modular ceilings  
 T130, nominal rating: 2/500  
 Push-in terminals: 0.5-0.75 mm<sup>2</sup>, single-core  
 For the automatic luminaire wiring:  
 IDC terminals for leads HO5V-U 0.5  
 Clip fixing for wall thickness up to 1 mm  
 Weight: 20.8 g, unit: 200 pcs.  
 Type: 48300

**Ref. No.: 109487**

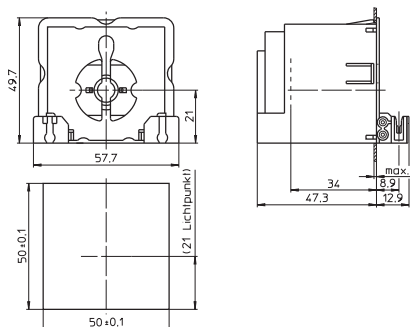


## G13 built-in lampholder with lamp lock

for lamps T8 and T12  
 Contacts on both sides  
 Casing: PBT GF, white, T130, nominal rating: 2/500  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Fixing holes for screws M3  
 Weight: 12.9/18 g, unit: 500 pcs.  
 Type: 46100/46101

**Ref. No.: 101643**

**Ref. No.: 101647** with spring adjustment

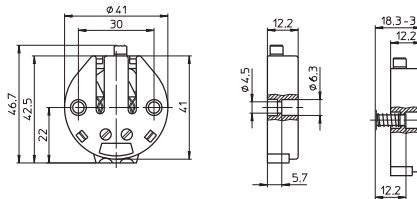


## G13 built-in lampholders for lamps T8 and T12

Casing: PC, white, T110  
 Nominal rating: 2/500  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Fixing holes for screws M3  
 5 rotation stops  
 Weight: 9/10.6 g, unit: 1000 pcs.  
 Type: 48500/48501

**Ref. No.: 101787**

**Ref. No.: 101789** with spring adjustment

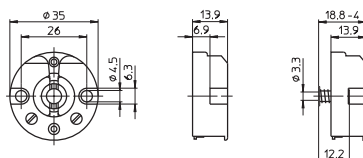

# Lampholders and Accessories for T Lamps

G13 built-in lampholder with spring adjustment

for lamps T8 and T12

Contacts on both sides

Casing: PBT GF, white, T130

Nominal rating: 2/500

Screw terminals: 0.5-2.5 mm<sup>2</sup>


Fixing holes for screws M3

Front lamp insertion

Weight: 14 g, unit: 500 pcs.

Type: 49401

**Ref. No.: 101812**



1

2

3

## G13 Surface-mounted Lampholders

**For fluorescent lamps T8 (T26), T12 (T38)**

Pin support for reliable contact

(except for type 485)

Max. permitted temperature  $T_m$

on the rear side of the lampholder: 110 °C

G13 surface-mounted lampholder for lamps T8 and T12

Lamp axis: 25.5 mm

Casing: PC, white, rotor: PBT GF, white, T130

Nominal rating: 2/500


Push-in twin terminals: 0.5-1 mm<sup>2</sup>

Fixing hole:  $\varnothing$  3.8 mm

Weight: 7.2 g, unit: 500 pcs.

Type: 27722

**Ref. No.: 100572**



4

5

6

G13 surface-mounted lampholder with starter attachment

for lamps T8 and T12

Lamp axis: 25.5 mm

Casing: PC, white, rotor: PBT GF, white, T130

Nominal rating: 2/500


Push-in twin terminals: 0.5-1 mm<sup>2</sup>

Fixing hole:  $\varnothing$  3.8 mm

Weight: 9.5 g, unit: 500 pcs.

Type: 27822

**Ref. No.: 100583**

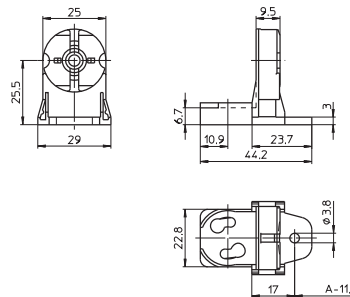

7

8

G13 surface-mounted lampholder for lamps T8

Lamp axis: 17 mm

Casing: PC, white, rotor: PBT GF, white, T130

Nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm<sup>2</sup>


Fixing hole for self-tapping screw

acc. to ISO 1481/7049-ST3.5-C/F

Weight: 5.4 g, unit: 1000 pcs.

Type: 27356

**Ref. No.: 100551**



9



10

# Lampholders and Accessories for T Lamps

G13 surface-mounted lampholders with lamp lock  
for lamps T8 and T12, lamp axis: 25 mm  
Contacts on both sides  
Casing: PBT GF, white, T130  
Screw terminals: 0.5-2.5 mm<sup>2</sup>, nominal rating: 2/500  
Bracket: zinc-coated polished steel  
Fixing slots for screws M4  
Weight: 35/36 g, unit: 500 pcs.  
Type: 46102/46103

**Ref. No.: 101651**



**Ref. No.: 101655** with spring adjustment

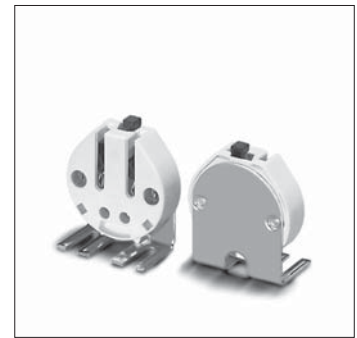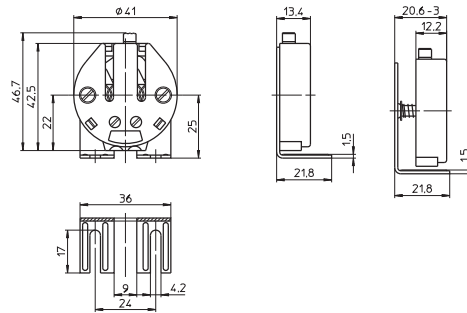

G13 surface-mounted lampholders  
for lamps T8 and T12  
Lamp axis: 25 mm, casing: PC, white, T110  
Screw terminals: 0.5-2.5 mm<sup>2</sup>, nominal rating: 2/500  
Bracket: zinc-coated polished steel  
Fixing slots for screws M4  
5 rotation stops  
Weight: 26/28.1 g, unit: 500 pcs.  
Type: 48502/48503

**Ref. No.: 101791**

**Ref. No.: 101793** with spring adjustment

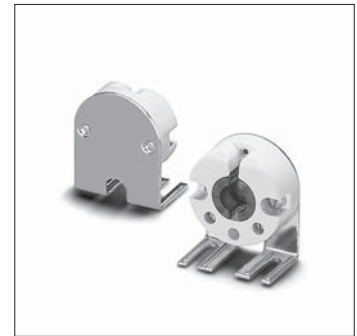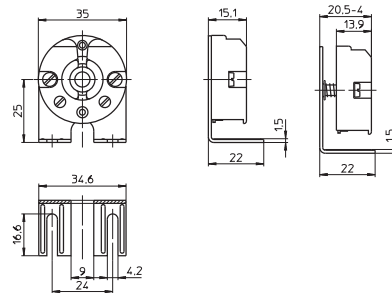

## Accessories

### For lampholders for fluorescent lamps T8 (T26), T12 (T38)


The luminaire manufacturer is responsible for the right choice of accessories.

Lamp supports  
Fixing hole for screw M4  
Weight: 4.3/6.8 g, unit: 500 pcs.  
Type: 20400 for lamps T8

**Ref. No.: 100442** material: zinc-coated polished steel


Type: 20401 for lamps T12

**Ref. No.: 100444** material: CrNi-steel



Lamp supports for lamps T8  
Material: PC, crystal-clear  
Fixing hole for screw M4  
Weight: 2 g, unit: 1000 pcs.  
Type: 20501

**Ref. No.: 100448**





# Lampholders and Accessories for T Lamps

## Push-fit bracket

For G13 built-in lampholder 537174, 537206 (see p. 218-219) and starter holder 101627 and 109792 (see p. 235-236), material: PC, white  
Lamp axis optional: 46/51/56 mm  
Push-fit foot for wall thickness 0.5-1 mm  
Option for lateral or base wiring  
Weight: 5.3 g, unit: 1000 pcs.  
Type: 97532

**Ref. No.: 105843**

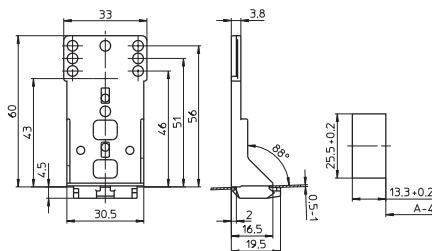



1

2

## Push-fit bracket

For G13 built-in lampholder 537181, 537166, 537174 (see p. 218), 537206 and 507133 (see p. 219)  
Material: PC, grey  
Lamp axis optional: 33/40/46/51/56 or 43 mm (lateral lamp insertion)  
Push-fit foot for wall thickness 0.5-1 mm  
Weight: 6 g, unit: 1000 pcs.  
Type: 97044

**Ref. No.: 108780**

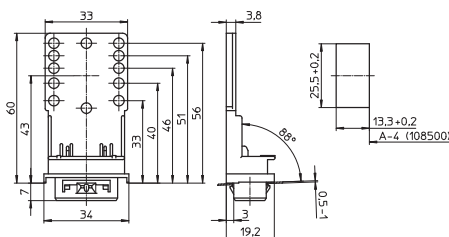

3

4

## Foot gasket for degree of protection IP50



For push-fit bracket 108780

Material: EPDM, black

Weight: 0.7 g

Type: 98003

**Ref. No.: 108266**





5

6

## Push-fit bracket, right

For G13 built-in lampholders 101769, 537174 and 537206 (see p. 218-219)  
Material: PC, white  
Lamp axis optional: 25/45 mm, distance between two lamp axes optional: 30/35 mm  
Push-fit foot for wall thickness 0.5-1 mm  
Option for lateral or base wiring  
Weight: 6.6 g, unit: 1000 pcs.  
Type: 97533

**Ref. No.: 105845**

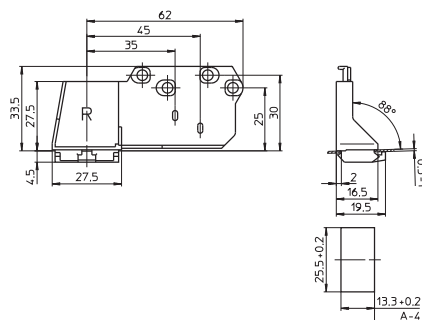



7

8

## Push-fit bracket, left

For G13 built-in lampholders 537174, 537206 (see p. 218-219)  
Material: PC, white  
Lamp axis optional: 25/45 mm, distance between two lamp axes optional: 30/35 mm  
Push-fit foot for wall thickness 0.5-1 mm  
Option for lateral or base wiring  
Weight: 6.7 g, unit: 1000 pcs.  
Type: 97534

**Ref. No.: 105847**

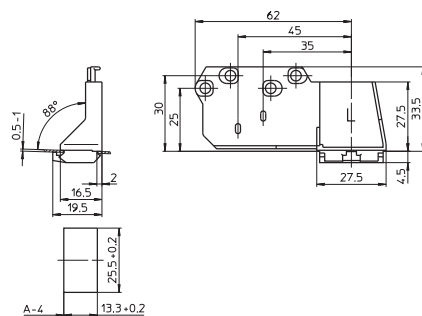

9

10

# Lampholders and Accessories for T Lamps

## Cable holder


Material: PA, white

Push-fit foot for cut-out  $\varnothing$  4 mm  
for wall thickness 0.6-1.2 mm

Weight: 0.2 g, unit: 5000 pcs.

Type: 97147

**Ref. No.: 109086**



## Cable holder

For the automatic luminaire wiring  
and manual wiring


Material: PC, white

Degree of protection IP50

Weight: 0.5 g, unit: 5000 pcs.

Type: 97117

**Ref. No.: 108845**



## Cable holder


For the automatic luminaire wiring  
and manual wiring

Material: PA, white

Weight: 2.1 g, unit: 7500 pcs.

Type: 0607

**Ref. No.: 159968**





## G13 Lampholders, Degree of Protection IP54

**For fluorescent lamps T8 (T26), T12 (T38)  
For luminaires of protection class I and II**

Lampholders protected against dust and  
splashing water (IP54)

To convert luminaires from IP20 to IP54

Pin support for reliable contact

With spring adjustment

Max. permitted temperature  $T_m$

on the rear side of the lampholder: 110 °C

G13 push-fit lampholder for lamps T8/T12

Casing: PC, white, interior part: PBT GF, white

Rotor: PBT GF, white, T140

Nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>


Fixing clips for wall thickness 0.7 mm

Screw rings see page 229

Weight: 17.1 g, unit: 500 pcs.

Type: 84171 system 161

**Ref. No.: 107957**

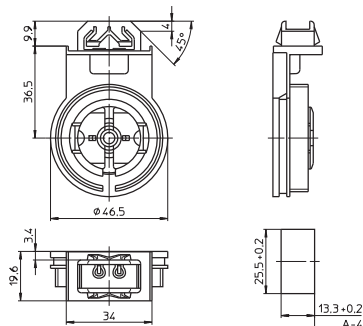

G13 push-fit twin lampholder for lamps T8/T12

Casing: PC, white, interior part: PBT GF, white

Rotor: PBT GF, white, T140

Nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>



Fixing clips for wall thickness 0.7 mm

Screw rings see page 229

Weight: 33.6 g, unit: 250 pcs.

Type: 84173 system 162

**Ref. No.: 107959**

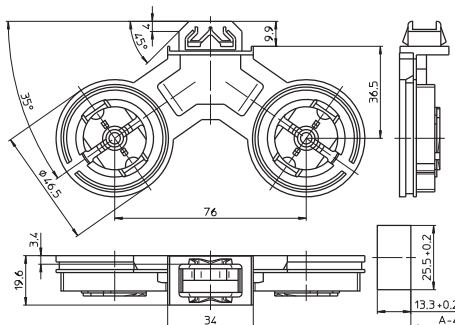

Food gasket for degree of protection IP54



For lampholder systems 161, 162

Material: EPDM, black

Weight: 0.7 g

Type: 98003

**Ref. No.: 108266**



1

2

3

4

5

6

7

8

9

10



## G13 Lampholders, Degree of Protection IP65/IP67

**For fluorescent lamps T8 (T26), T12 (T38)  
For luminaires of protection class I and II**

Lampholders protected against dust and jet of water (IP65)  
Dust and watertight lampholders (IP67)  
Pin support for reliable contact with spring adjustment

Max. permitted temperature  $T_m$  on the rear side of the lampholder: 110 °C

G13 push-fit lampholders for lamps T8/T12

Casing: PC, interior part: PBT GF

Rotor: PBT GF, white, T140

Nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>

Fixing clips for wall thickness 1.4-2 mm


Screw rings see page 229

Weight: 17.3 g, unit: 500 pcs.

Type: 84172 system 163

**Ref. No.: 107958** casing white

**Ref. No.: 108666** casing grey



G13 push-fit twin lampholders for lamps T8/T12

Casing: PC, interior part: PBT GF

Rotor: PBT GF, white, T140

Nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>

Fixing clips for wall thickness 1.4-2 mm



Screw rings see page 229

Weight: 34.2 g, unit: 250 pcs.

Type: 84174 system 164

**Ref. No.: 107960** casing white

**Ref. No.: 108669** casing grey

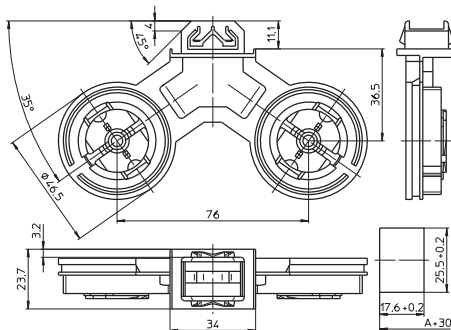

G13 push-fit lampholders for lamps T8/T12

Casing: PC, interior part: PBT GF, T140

Nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>

Fixing clips for wall thickness 1.4-2 mm

With slot insertion


Screw rings see page 229

Weight: 14.5 g, unit: 250 pcs.

Type: 84175 system 165

**Ref. No.: 108608** casing white

**Ref. No.: 108614** casing grey



Foot gaskets

For lampholder systems 163, 164, 165

Weight: 1/1.1 g

For degree of protection IP65

Material: cellular rubber

Type: 98004



**Ref. No.: 108267**

For degree of protection IP67

Material: silicone, transparent

Type: 98011

**Ref. No.: 504078**



# Lampholders and Accessories for T Lamps

Profiled foot gasket

For degree of protection IP67



For lampholder systems 163, 164, 165

Material: EPDM, black

Weight: 1.1 g, unit: 1000 pcs.

Type: 98008

**Ref. No.: 546254**

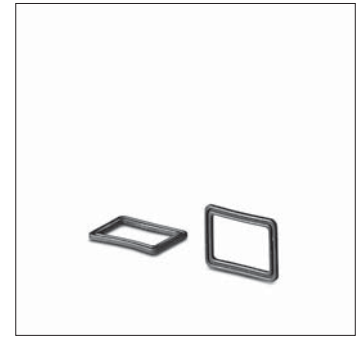

1

2

G13 lampholder for lamps T8/T12

Casing: PC, interior part: PBT GF, T140

Nominal rating: 2/500

With slot insertion


For wiring insert 108819

Screw rings see page 229

Weight: 15.1 g, unit: 500 pcs.

Type: 84180 system 167

**Ref. No.: 108948** casing white



3

4

G13 twin lampholder for lamps T8/T12

Casing: PC, interior part: PBT GF, T140

Nominal rating: 2/500

With slot insertion


For wiring insert 108819

Screw rings see page 229

Weight: 30.6 g, unit: 250 pcs.

Type: 84181 system 168

**Ref. No.: 108994** casing white

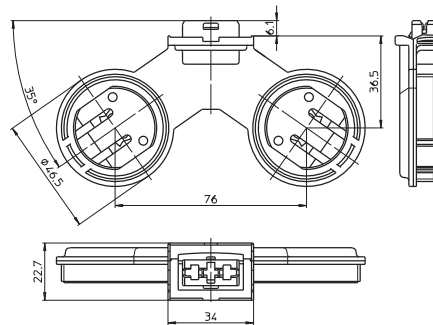

5

6

Wiring insert with push-fit foot

For lampholder systems 167, 168

Material: PC, grey

Push-in terminals: 0.5 mm<sup>2</sup>

For the automatic luminaire wiring:


IDC terminals for leads H05V-U 0.5

Push-fit foot for wall thickness 1.4-2 mm

Weight: 5.1 g, unit: 500 pcs.

Type: 22852

**Ref. No.: 108819**



7

8

Foot gasket for degree of protection IP67



For lampholder systems 167, 168

Material: PE foam

Weight: 0.5 g

Type: 98002

**Ref. No.: 108947**

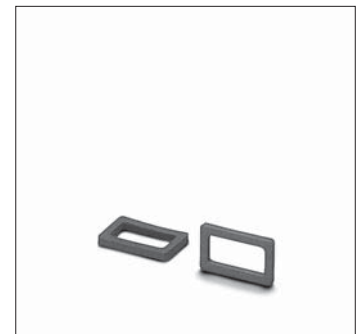



9

10

# Lampholders and Accessories for T Lamps


Foot gasket, profiled shape  
 For degree of protection IP67  
 For lampholder systems 167, 168  
 Material: EPDM, black  
 Weight: 0.7 g, unit: 1000 pcs.  
 Type: 98087

**Ref. No.: 503773**




G13 lampholder for lamps T8/T12  
 Casing: PC, white, interior part: PBT GF, T140  
 Nominal rating: 2/500  
 Screw fixing foot with tapped holes M4  
 Screw rings see page 229  
 With slot insertion  
 Weight: 14 g, unit: 250 pcs.  
 Type: 84105 system 152

**Ref. No.: 521123**

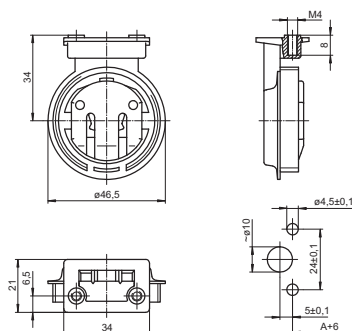

Foot gasket for degree of protection IP65/IP67  
 For lampholder system 152  
 Material: EPDM, black  
 Weight: 1.4 g, unit: 1000 pcs.  
 Type: 98085

**Ref. No.: 106094**



## Screw Rings for G13 Lampholders, Degree of Protection IP54, IP65, IP67

For lampholder systems 152, 161, 162, 163, 164, 165, 167, 168

Screw rings

Ring: PBT GF, gasket: silicone

Weight: 17/20 g, unit: 500/250 pcs.

Type: 84122 for lamps T8

**Ref. No.: 103710** white


**Ref. No.: 103709** grey

Type: 84123 for lamps T12 or

for lamps T8 with protection tube  $\varnothing$  38 mm

**Ref. No.: 103712** white

**Ref. No.: 103711** grey



Screw rings with heat dissipator

For lamps T8 with

plastic protection tube  $\varnothing$  38 mm

Ring: PBT GF


Gasket: silicone, shell: aluminium

Weight: 40 g, unit: 250 pcs.

Type: 84154

**Ref. No.: 103744** white

**Ref. No.: 103743** grey



Screw rings

For protection tube  $\varnothing$  50 mm

Ring: PBT GF



Gasket: EPDM

Weight: 43.8 g, unit: 125 pcs.

Type: 84159 not suitable for system 152

**Ref. No.: 103750** white

**Ref. No.: 103749** grey

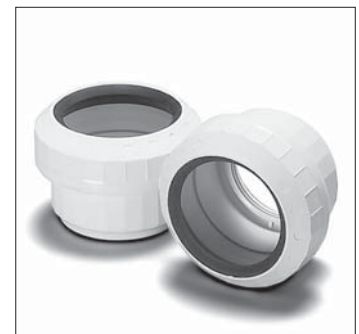

1

2

3

4

5

6

7

8

9

10

## G10q Lampholders, Accessories

### For fluorescent lamps T-R

G10q push-fit lampholder

Casing: PC, white, T110

Spring bracket  $\varnothing$  32 mm: CrNi-steel

Nominal rating: 2/500

Push-in terminals: 0.5-1 mm<sup>2</sup>


Lamp axis: 23 mm

Push-fit foot for wall thickness up to 1.2 mm

Weight: 8.4 g, unit: 500 pcs.

Type: 40100

**Ref. No.: 101528**



Lamp support for T-R lamps

For lampholder 101528

Material: PC, white

Spring bracket  $\varnothing$  32 mm: CrNi-steel


Lamp axis: 23 mm

Push-fit foot for wall thickness up to 1.2 mm

Weight: 4.4 g, unit: 500 pcs.

Type: 40150

**Ref. No.: 101532**

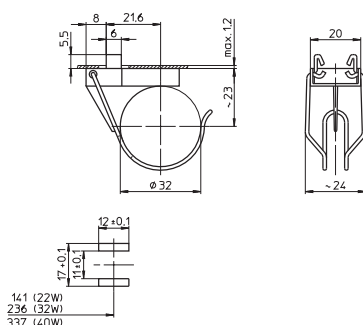

G10q surface-mounted lampholder

Casing: PC, white, T110

Spring bracket  $\varnothing$  32 mm: CrNi-steel

Nominal rating: 2/250

Connection leads: H05V2-U 1X0.75,  
max. 105 °C, length: 270 mm



Lamp axis: 35 mm

Fixing plates with tapped holes M4

Weight: 25 g, unit: 250 pcs.

Type: 58016

**Ref. No.: 102409**



Lamp support for T-R lamps

For lampholder 102409

Material: PC, white

Spring bracket  $\varnothing$  32 mm: CrNi-steel


Lamp axis: 35 mm

Fixing plates with tapped holes M4

Weight: 8 g, unit: 500 pcs.

Type: 58001

**Ref. No.: 102407**



## W4.3x8.5d Surface-mounted Lampholder

For fluorescent lamps T2 (T7)

W4.3x8.5d surface-mounted lampholder

Casing: PC, white, T110

Nominal rating: 2/250

Leads: H05V-K 1X0.5 max. 90 °C,

length: 450 mm, ferrules on bare end of core


Fixing hole: Ø 2.6 mm

Spring-mounted insert for reliable contact

Weight: 10.3 g, unit: 500 pcs.

Type: 09000

**Ref. No.: 107536**

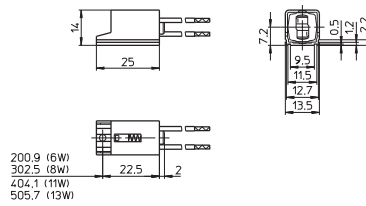

1

2

3

4

5

6

7

8

9

10



OPTIMUM  
START WITH  
COMPONENTS  
MADE BY VS



## STARTER HOLDERS AND TERMINAL BLOCKS, ACCESSORIES

Vossloh-Schwabe provides a comprehensive range of miscellaneous accessories for operating fluorescent lamps.

### **Starter holders**

Starters are needed for lamp circuits operated with electromagnetic ballasts. VS provides a number of starter holders with various designs for this purpose. Almost all starter holders are made of polycarbonate and qualify for a T110 temperature rating.

### **Terminal blocks**

Furthermore, Vossloh-Schwabe's product range also includes connection terminals, some of which feature the VDE-approved IDC method in addition to the well-known and installation-friendly push-in connectors. The connection terminals therefore make it possible to automate luminaire wiring and thus wire up several terminals using a single cable.

The range is rounded off by built-in rocker switches.

# 3

## Starter Holders and Terminal Blocks, Accessories

**Starter holders, accessories**

**234–237**

**Terminal blocks, accessories**

**238–242**

**Built-in rocker switches**

**242**

**Technical details for fluorescent lamps**

**243–271**

General technical details

394–401

Glossary

402–404

1

2

3

4

5

6

7

8

9

10



## Starter Holders, Accessories

For starters acc. to DIN VDE 0712 part 101, IEC 60155

Starter holders with central studs, suitable for luminaires of protection class II, are available on request.

Starter holder

Material: PC, white

T110, nominal rating: 2/250


Push-in terminals: 0.5-1 mm<sup>2</sup>

Rear split pins for wall thickness up to 1.2 mm

Weight: 2.1 g, unit: 1000 pcs.

Type: 02113

**Ref. No.: 535131**



Starter holder

Material: PC, white

T110, nominal rating: 2/250

Push-in terminals: 0.5-1 mm<sup>2</sup>, single-core


Front and rear split pins for wall thickness up to 1.2 mm

Rear of starter holder/luminaire: IP40

Weight: 2.8 g, unit: 1000 pcs.

Type: 02110

**Ref. No.: 109784**

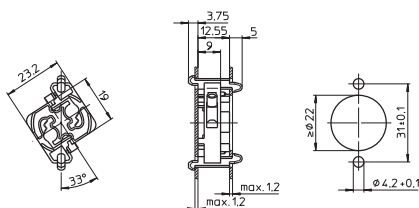

Starter holder

Material: PC, white

T110, nominal rating: 2/250

Push-in terminals: 0.5-1 mm<sup>2</sup>

Rear split pins for wall thickness up to 1.2 mm


Lateral split pins for wall thickness up to 1.25 mm

Rear of starter holder/luminaire: IP40

Weight: 3.7 g, unit: 1000 pcs.

Type: 02120

**Ref. No.: 100064**

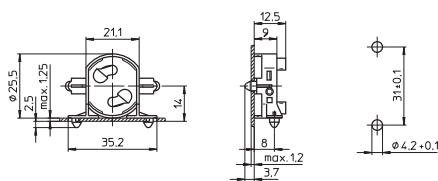

Starter holder

Material: PC, white

T110, nominal rating: 2/250


Push-in terminals: 0.5-1 mm<sup>2</sup>

Fixing holes for screws M3

Weight: 3.8 g, unit: 1000 pcs.

Type: 02150

**Ref. No.: 100069**

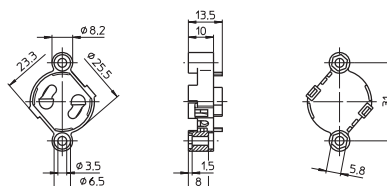


# Starter Holders and Terminal Blocks, Accessories

## Starter holder

Material: PC, white  
 T110, nominal rating: 2/250  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Front split pins, flat  
 for wall thickness 0.6-1 mm  
 Weight: 3.1 g, unit: 1000 pcs.  
 Type: 02170

**Ref. No.: 106818**

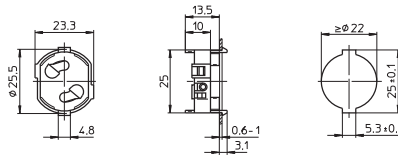


1

2

## Starter holder

Material: PC, white  
 T110, nominal rating: 2/250  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Rear split pins for wall thickness up to 1.2 mm  
 Rear of starter holder/luminaire: IP40  
 Weight: 3.3 g, unit: 1000 pcs.  
 Type: 43000

**Ref. No.: 101627**

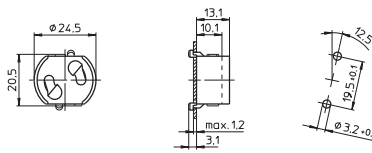


3

4

## Starter holder

Material: PC, white  
 T110, nominal rating: 2/250  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Lateral split pins for wall thickness up to 1 mm  
 Rear of starter holder/luminaire: IP40  
 Weight: 3.4 g, unit: 1000 pcs.  
 Type: 43010

**Ref. No.: 101629**

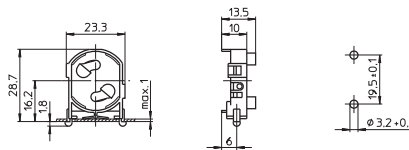


5

6

## Starter holder

Material: PC, white  
 T110, nominal rating: 2/250  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Rear and lateral split pins  
 for wall thickness up to 1 mm  
 Rear of starter holder/luminaire: IP40  
 Weight: 3.5 g, unit: 1000 pcs.  
 Type: 43020

**Ref. No.: 108671**

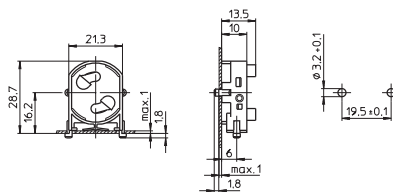


7

8

## Starter holder

Material: PC, white  
 T110, nominal rating: 2/250  
 Push-in terminals: 0.5-1 mm<sup>2</sup>  
 Fixing holes for screws M3  
 Weight: 3.7 g, unit: 1000 pcs.  
 Type: 43100

**Ref. No.: 101631**



9

10

# Starter Holders and Terminal Blocks, Accessories

## Starter holder

Material: PC, white

T110, nominal rating: 2/250

Push-in terminals: 0.5-1 mm<sup>2</sup>, single-core


Lateral split pins for wall thickness up to 1 mm

Rear of starter holder/luminaire: IP40

Weight: 3.7 g, unit: 1000 pcs.

Type: 43200

**Ref. No.: 109790**



## Starter holder

Material: PC, white

T110, nominal rating: 2/250

Push-in terminals: 0.5-1 mm<sup>2</sup>, single-core

Rear split pins for wall thickness up to 1.2 mm


Lateral split pins for wall thickness up to 1 mm

Rear of starter holder/luminaire: IP40

Weight: 3.7 g, unit: 1000 pcs.

Type: 43210

**Ref. No.: 109792**

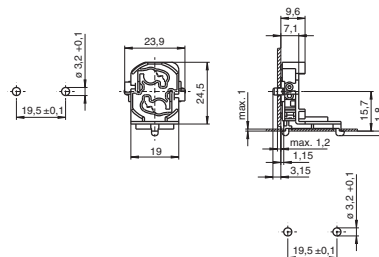

## Starter holder with integrated extension piece

Material: PC, white

T110, nominal rating: 2/250


Push-in terminals: 0.5-1 mm<sup>2</sup>

Front split pins for wall thickness up to 0.8 mm

Weight: 5.4 g, unit: 1000 pcs.

Type: 43300

**Ref. No.: 101636**

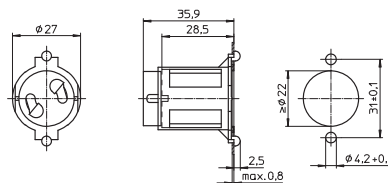

## Starter holder with integrated extension piece

Material: PC, white

For the automatic luminaire wiring

T110, nominal rating: 2/250



IDC terminals for leads H05V-U 0.5

Front split pins for wall thickness up to 1 mm

Weight: 5.4 g, unit: 1000 pcs.

Type: 43500

**Ref. No.: 108454**

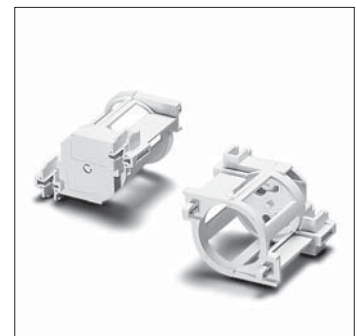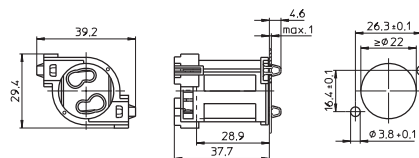

## Starter holder

Material: PC, white

For the automatic luminaire wiring

T110, nominal rating: 2/250


IDC terminals for leads H05V-U 0.5

Rear split pins for wall thickness up to 1 mm

Weight: 3.2 g, unit: 1000 pcs.

Type: 43510

**Ref. No.: 107723**

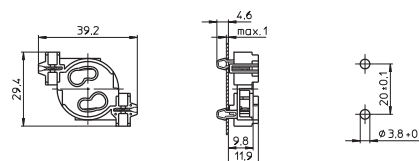

# Starter Holders and Terminal Blocks, Accessories

## Starter holder

Material: PC, white

T110, nominal rating: 2/250

Push-in terminals: 0.5-1 mm<sup>2</sup>

For the automatic luminaire wiring:


IDC terminals for leads H05V-U 0.5

Rear split pins for wall thickness up to 1 mm

Weight: 3 g, unit: 1000 pcs.

Type: 43520

**Ref. No.: 530079**

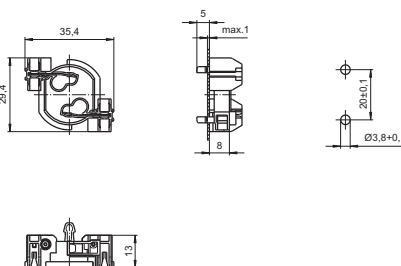

1

2

## Starter holder

Material: PA, white

T110, nominal rating: 2/250

For the automatic luminaire wiring:


IDC terminals for leads H05V-U 0.5

Lateral split pins for wall thickness up to 1 mm

Weight: 3 g, unit: 1000 pcs.

Type: 43410

**Ref. No.: 107445**

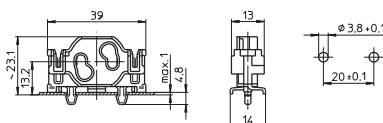

3

4

## Extension piece

For front clip-in fixing into luminaire metal sheets

For use with starter holder 109784 (see p. 234)


For screw caps type 97065

Material: PC, white

Weight: 3.5 g, unit: 500 pcs.

Type: 97064

**Ref. No.: 105482**

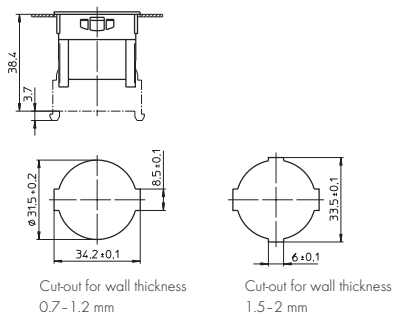

5

6

## Screw caps for degree of protection IP54/IP65/IP67

For extension piece 105482

Material: PP

Gasket: EPDM cellular rubber

Weight: 3.2/4/3.2/0.3 g, unit: 500 pcs.

Type: 97065 screw cap


**Ref. No.: 105483** white

**Ref. No.: 109575** grey

**Ref. No.: 105484** black

Type: 98086 gasket

**Ref. No.: 106095**

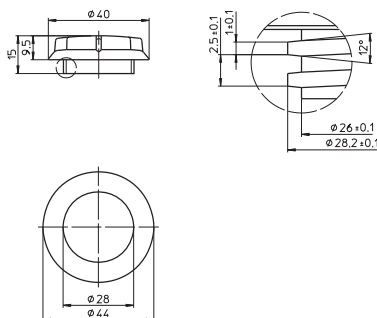

7

8

9

10

## Terminal Blocks, Accessories

Suitable only for solid conductors on the secondary connection

### Terminal blocks

Casing: PC, white, T85

Nominal rating: 450 V

Primary connection with release button:

push-in twin terminals 0.5-2.5 mm<sup>2</sup>/16 A

Secondary connection:

push-in twin terminals 0.5-1.5 mm<sup>2</sup>/16 A  
and 0.5-2.5 mm<sup>2</sup>/16 A




Connection for X2 RFI-suppression capacitor:

0.5-0.75 mm<sup>2</sup>, capacitor's pins must be insulated (stripped lead ends: 8<sup>+1</sup> mm)

For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5/6 A

Base split pins for wall thickness 0.6-1 mm

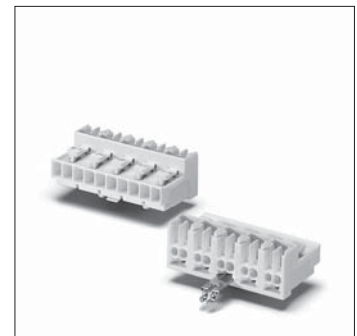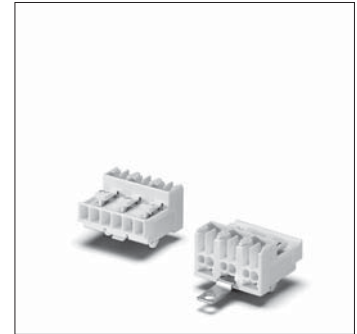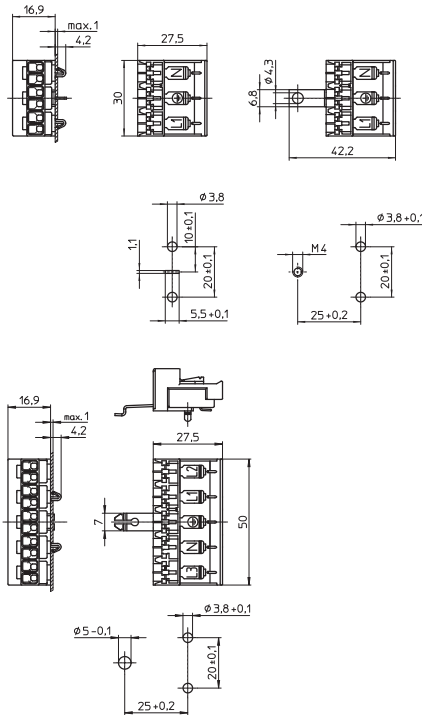

Type	Ref. No.	Number of poles	Earth-contact connection	Mark	Weight (g)	Unit (pcs.)
41500	<b>533312</b>	3-poles	not earthed	N, L2, L1	9.2	500
41510	<b>533313</b>	3-poles	earth spike	N, PE, L1	9.4	500
41520	<b>533314</b>	3-poles	earth strap M4	N, PE, L1	10	500
41530	<b>534948</b>	3-poles	earth finger	N, PE, L1	10	500
41540	<b>533315</b>	5-poles	not earthed	L3, L2, L4, N, L1	15.1	500
41550	<b>533316</b>	5-poles	earth spike	L3, L2, PE, N, L1	15.3	500
41560	<b>533317</b>	5-poles	earth strap M4	L3, L2, PE, N, L1	16	500
41570	<b>534954</b>	5-poles	earth finger	L3, L2, PE, N, L1	16	500

### Push-in cord grip

For terminal blocks type 415

For leads with insulation max. Ø 10.5 mm



Conductor fixed with self-tapping screws  
acc. to ISO 1481/7049-ST2.9-C/F

Material: PA, white

Weight: 2.2 g, unit: 500 pcs.

Type: 97734

**Ref. No.: 535474**



# Starter Holders and Terminal Blocks, Accessories

## Terminal blocks

Casing: PC, white, T85

Nominal rating: 450 V

Primary connection:

screw terminals 2.5 mm<sup>2</sup>

Secondary connection:

push-in twin terminals 1.5 mm<sup>2</sup>



(with IDC contacts: 1 mm<sup>2</sup>)

push-in terminal 0.5 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

Base split pins for wall thickness 0.6-1.2 mm

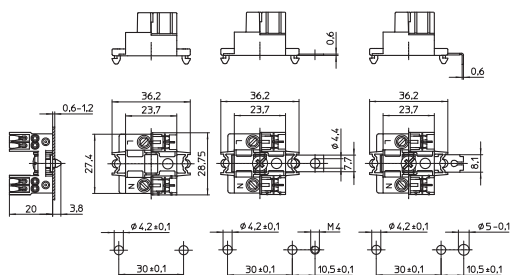

1

2

3

4

Type	Ref. No.	IDC	Number of poles	Earth-contact connection	Weight (g)	Unit (pcs.)
40660	<b>543793</b>	no	3-poles	not earthed	5.7	1000
40662	<b>543795</b>	no	3-poles	earth strap M4	8.4	1000
40666	<b>543800</b>	no	3-poles	earth finger	8.3	1000
40661	<b>543794</b>	yes	3-poles	not earthed	6	1000
40663	<b>543796</b>	yes	3-poles	earth strap M4	8.7	1000
40667	<b>547801</b>	yes	3-poles	earth finger	8.6	1000

## Terminal blocks with fuse holder

Material: PC, white, T70

nominal rating: 250 V

Primary connection: screw terminals 2.5 mm<sup>2</sup>

Secondary connection:

push-in twin terminals 1.5 mm<sup>2</sup>

(with IDC contacts: 1 mm<sup>2</sup>)

push-in terminal 0.5 mm<sup>2</sup>



For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

With retaining clip for fuses 5x20 mm

With integrated fuse on request

Base split pins for wall thickness 0.6-1.2 mm

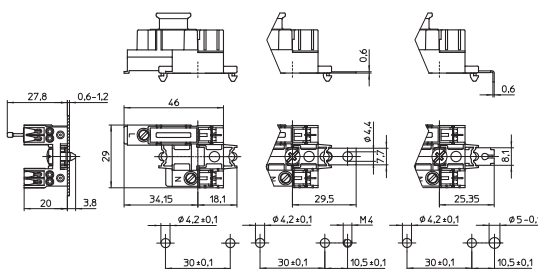

5

6

Type	Ref. No.	IDC	Number of poles	Earth-contact connection	Weight (g)	Unit (pcs.)
40670	<b>543802</b>	no	3-poles	not earthed	8.7	1000
40672	<b>543805</b>	no	3-poles	earth strap M4	11.5	1000
40676	<b>543809</b>	no	3-poles	earth finger	14.1	1000
40671	<b>543803</b>	yes	3-poles	not earthed	9.0	1000
40673	<b>543806</b>	yes	3-poles	earth strap M4	11.8	1000
40677	<b>543810</b>	yes	3-poles	earth finger	14.4	1000

7

8

## Terminal blocks

Material: PC, white, T85, nominal rating: 400 V

Primary connection: screw terminals 2.5 mm<sup>2</sup>

Secondary connection:

push-in twin terminals 1.5 mm<sup>2</sup>

push-in terminal 0.5 mm<sup>2</sup>



Fixing holes for screws M3

Weight: 7.7/10.6 g, unit: 1000 pcs.

Type: 40650/40651

Ref. No.: **533860**

Ref. No.: **533861** with earth strap for screw M4

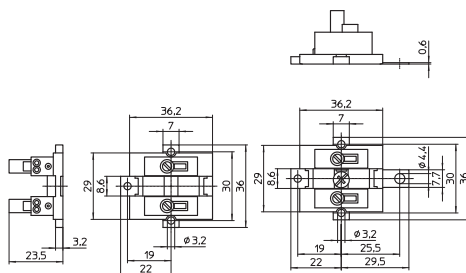

9

10

# Starter Holders and Terminal Blocks, Accessories

Terminal blocks with fuse holder

Material: PC, white, T70, nominal rating: 250 V

Primary connection: screw terminals 2.5 mm<sup>2</sup>

Secondary connection:

push-in twin terminals 1.5 mm<sup>2</sup>

push-in terminal 0.5 mm<sup>2</sup>



Fixing holes for screws M3

Weight: 11.2/14.1 g, unit: 1000 pcs.

Type: 40655/40656

**Ref. No.: 533865**

**Ref. No.: 533866** with earth strap for screw M4

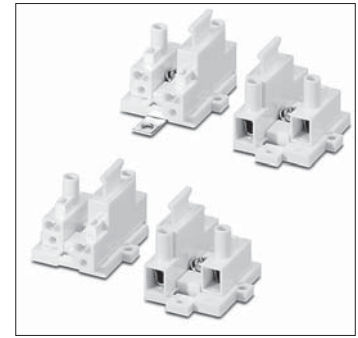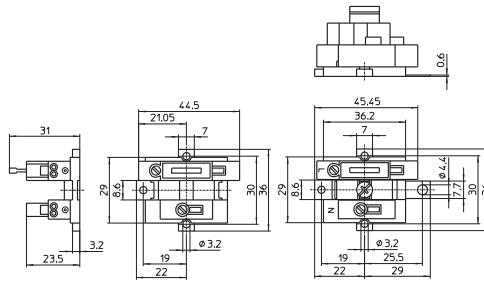

Terminal blocks

Casing: PC, grey, T85

Nominal rating: 450 V

Primary connection:

screw terminals 2.5 mm<sup>2</sup>

Secondary connection:

push-in twin terminal 1.5 mm<sup>2</sup>



(with IDC contacts: 1 mm<sup>2</sup>)

push-in terminal 0.5 mm<sup>2</sup>

For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

Base split pins for wall thickness 0.6-1.2 mm

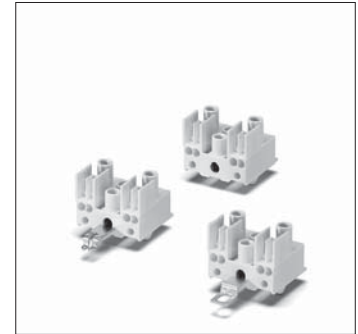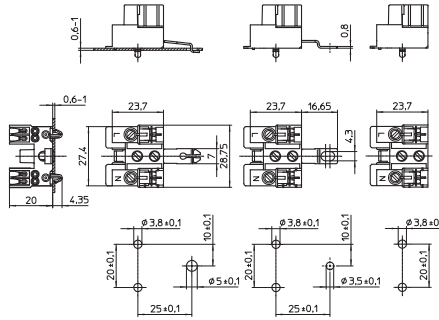

Type	Ref. No.	IDC	Number of poles	Earth-contact connection	Weight (g)	Unit (pcs.)
40560	<b>543770</b>	no	3-poles	not earthed	8	1000
40562	<b>543772</b>	no	3-poles	earth strap M4	8.7	1000
40566	<b>543777</b>	no	3-poles	earth finger	8.8	1000
40561	<b>543771</b>	yes	3-poles	not earthed	8.3	1000
40563	<b>543773</b>	yes	3-poles	earth strap M4	9	1000
40567	<b>543778</b>	yes	3-poles	earth finger	9.1	1000

Terminal blocks with fuse holder

Material: PBT, grey, T70

Nominal rating: 250 V

Primary connection: screw terminals 2.5 mm<sup>2</sup>

Secondary connection:

push-in twin terminals 1.5 mm<sup>2</sup>

(with IDC contacts: 1 mm<sup>2</sup>)

push-in terminal 0.5 mm<sup>2</sup>



For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

With retaining clip for fuses 6x25 mm

With integrated fuse on request

Base split pins for wall thickness 0.6-1.2 mm

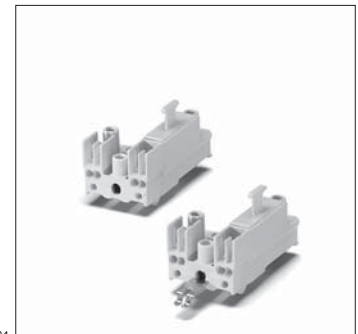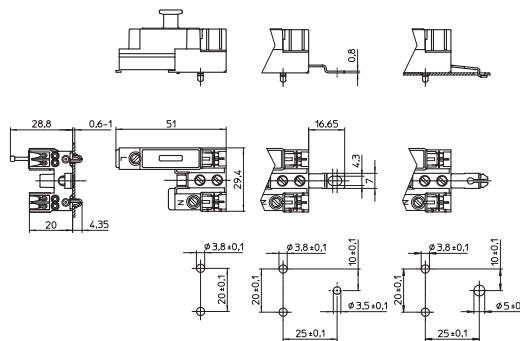

Type	Ref. No.	IDC	Number of poles	Earth-contact connection	Weight (g)	Unit (pcs.)
40570	<b>543781</b>	no	3-poles	not earthed	11	500
40572	<b>543783</b>	no	3-poles	earth strap M4	11.7	500
40576	<b>543787</b>	no	3-poles	earth finger	11.8	500
40571	<b>543782</b>	yes	3-poles	not earthed	11.3	500
40573	<b>543784</b>	yes	3-poles	earth strap M4	12	500
40577	<b>543788</b>	yes	3-poles	earth finger	12.1	500

# Starter Holders and Terminal Blocks, Accessories

## Terminal blocks

Casing: PC, white, T95

Nominal rating: 16/250



Primary and secondary connection  
with release button:

push-in twin terminals 0.5-1.5 mm<sup>2</sup>

push-in terminals 0.75 mm<sup>2</sup>

Fixing holes for screws M3

Base split pins

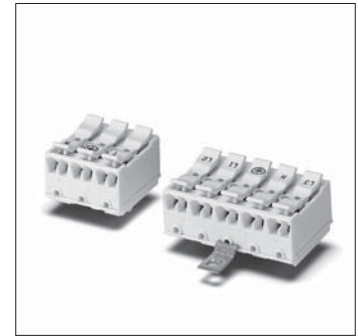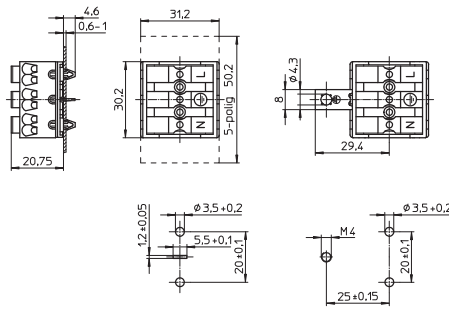

1

2

Type	Ref. No.	Number of poles	Earth-contact connection	Mark	Weight (g)	Unit (pcs.)
40710	<b>509534</b>	3-poles	earth spike	N PE L	13.2	500
40711	<b>530829</b>	3-poles	with earth strap M4	N PE L	14.8	500
40712	<b>529596</b>	3-poles	not earthed	N PE L	13	500
40730	<b>509535</b>	5-poles	earth spike	L3 N PE L1 L2	17.4	500
40731	<b>530831</b>	5-poles	with earth strap M4	L3 N PE L1 L2	19	500

3

## Push-in cord grip

For terminal blocks type 407

For leads with insulation Ø 9.5-12.5 mm


Conductor fixed with screws

Material: PC, white

Weight: 6.2 g, unit: 500 pcs.

Type: 80016

**Ref. No.: 525893**



4

5

6

7

8

9

10





# Starter Holders and Terminal Blocks, Accessories

Terminal blocks

Casing: PA, white

Primary and secondary connection:  
screw terminals

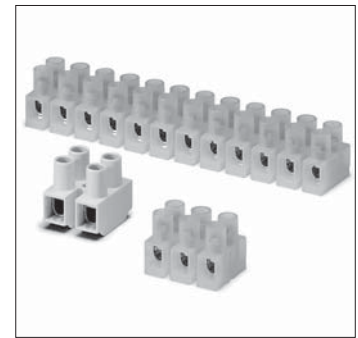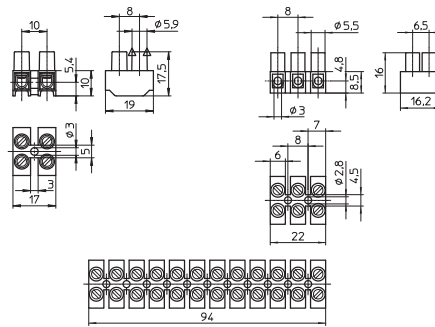

Type	Ref. No.	Number of poles	Nominal rating	Cconnection primary/secondary	T-Marking	Weight g	Unit pcs.
41600	<b>537484</b>	2-poles	24 A / 450 V	0.5-2.5 mm <sup>2</sup>	T85	5.2	2000
41600	<b>544000</b>	2-poles	24 A / 450 V	0.5-2.5 mm <sup>2</sup>	T180	5.6	2000
41663	<b>542503</b>	3-poles	24 A / 450 V	0.5-2.5 mm <sup>2</sup>	T110	5.3	2000
41672	<b>544011</b>	12-poles	24 A / 450 V	0.5-2.5 mm <sup>2</sup>	T110	21.3	2000

## Built-in Rocker Switches

Built-in rocker switch 1-pole

For cut-out 16x26 mm

Casing: PC, white, T100

Contact pillar and rocker: PBT, white

Terminal: nichrome steel

Nominal rating: 6(2)/250~


Push-in terminals: 0.5-1 mm<sup>2</sup>

Lateral fixing clips for wall thickness 0.6-1 mm

Weight: 7.2 g, unit: 500 pcs.

Type: 20200

**Ref. No.: 100437**

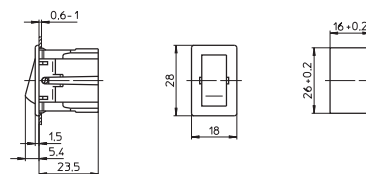

**3**

Components for Fluorescent Lamps

<b>Electronic ballasts</b>	<b>244–259</b>
Assembly instructions for mounting and installing – Electronic ballasts	245–252
DALI system information	252–254
Circuit diagrams – Electronic ballasts	255–259
<b>Electromagnetic ballasts</b>	<b>259–263</b>
Assembly instructions for mounting and installing – Electromagnetic ballasts	260–263
Circuit diagrams – Electromagnetic ballasts	263
<b>Connection terminals</b>	<b>264</b>
<b>Lampholders for fluorescent lamps</b>	<b>265</b>
<b>Lamp table</b>	<b>266–268</b>
<b>Key to lamp designations</b>	<b>268</b>
<b>Energy efficiency classification</b>	<b>269–271</b>
<b>General technical details</b>	<b>394–401</b>
Glossary	402–404

1

2

**3**

4

5

6

7

8

9

10

## Ballasts for fluorescent lamps

The operation of a fluorescent lamp depends on a ballast that stabilises the lamp's preheat current after connection to the mains and, in conjunction with the starter, also supplies the required lamp ignition voltage after preheating. After ignition, the ballast then serves to limit the lamp current. As fluorescent lamps are characterised by a negative characteristic current-voltage curve, lamp current stabilisation is essential with regard to both the lamp's stable operation and a long service life, which is also dependent on compliance with the starting conditions (preheat current and ignition voltage). Unfavourable starting conditions cause damage to the electrodes every time the lamp is started and thus reduce the lamp's service life. Furthermore, care should be taken to prevent crossdischarge in the electrode area during preheating, which also shortens lamp service life.

Electromagnetic (inductive) ballasts have to be operated in conjunction with starters for lamp ignition and capacitors for blind current compensation. In addition, capacitors for RFI suppression will also be required for certain circuits. Electronic ballasts do not require any additional components.

## Electronic ballasts (EB)

VS electronic ballasts are designed for mains voltages of 220 V to 240 V (exceptions are devices for the North American market where the nominal mains voltage is 120 V or 277 V) and are used to operate fluorescent lamps at high frequencies. The lamps are ignited with an internally generated ignition voltage, thereby removing the need for an external starter. The power factor ( $\lambda$ )  $> 0.95$  also removes the need for compensation, unlike with electromagnetic ballasts. The only exceptions are low-output ELXs models, which attain a power factor of 0.6. Luminaires fitted with electronic ballasts are characterised by low energy consumption as they draw substantially less system power than conventional, inductive applications. This is firstly because the lamp consumes less power to achieve the same luminous flux and secondly because the internal loss of an electronic ballast only amounts to approx. 8% to 10% of the lamp's output. Furthermore, thanks to their modern circuitry, the power input of VS electronic ballasts remains constant even in the event of mains voltage fluctuations, thus ensuring permanently low energy consumption.

VS electronic ballasts permit a broad range of applications. For instance, the VS product range includes many ballast types for multiple lamp operation. These ballasts reduce installation and component costs and thus enable particularly efficient luminaires. Twin-lamp electronic ballasts permit so-called master-slave operation. The lamps of two single-lamp luminaires are operated by a twin-lamp electronic ballast that is built into the so-called master luminaire. The lamp of the slave luminaire is electrically connected to the electronic ballast.

Multi-lamp electronic ballasts also provide an interesting advantage in that several lamps of different ratings can be connected. Electronic ballasts of this kind simplify storage and logistics.

The use of electronic ballasts makes a lighting system both more convenient and efficient to operate:

- reduced power consumption (up to 30%) at undiminished light output
- 50% longer service life
- stabilised lamp output
- overvoltage protection
- no stroboscopic effect
- flicker-free lamp start
- no need for a starter or capacitor
- low wiring effort
- no radiated electromagnetic interference
- low self-heating due to minimal power loss
- automatic shutdown of defective lamps
- automatic restart once the lamp has been changed (except ELXe series)

Vossloh-Schwabe electronic ballasts are developed on the basis of the latest technological and component standards and are produced using state-of-the-art technology, whereby consideration is taken of our customers' quality standards in our quality assurance system.

## Assembly Instructions for Electronic Ballasts

### For mounting and installing of electronic ballasts for fluorescent lamps

#### Mandatory regulations

EN 61347-1	Lamp controlgear – part 1: general and safety requirements
EN 61347-2-3	Lamp controlgear – part 2-3: particular requirements for a.c. supplied electronic ballasts for fluorescent lamps
EN 60929	AC-supplied electronic ballasts for tubular fluorescent lamps
DIN VDE 0100	Erection of low voltage installations
EN 60598-1	Luminaires – part 1: general requirements and tests
EN 61000-3-2	Electromagnetic compatibility (EMC) – part 3: maximum values – main section part 2: maximum values for mains harmonics (device input current up to and including 16 A per conductor)
EN 55015	Maximum values and methods of measurement for RFI suppression in electrical lighting installations and similar electrical appliances
EN 61547	Installations for general lighting purposes – EMC immunity requirements

1

2

3

4

5

6

7

8

9

10

## Descriptions of VS electronic ballasts (EBs)

### ELXs ballasts

The family of ELXs ballasts forms a perfect alternative to magnetic ballasts. ELXs ballasts have the same fixing hole centres as standard electromagnetic ballasts. The lamp is ignited after a preheating time (warm start) of 1.5 seconds. These ballasts are dimensioned to take system outputs (lamp output plus power loss of the electronic ballast) of up to 25 W. The power factor of these ballasts amounts to approx. 0.6. The average service life of these ballasts totals 30,000 hours with a failure rate of  $\leq 0.2\%$  per 1,000 operating hours.

### ELXe ballasts (instant start)

With this ballast family, the lamps ignite immediately after connection to the mains by applying an ignition voltage of max. 1,500 V to the gas discharge path of the lamp. The ignition time totals approx. 0.5 seconds. As this puts a severe strain on the electrodes, the realistic number of lamp starts is limited to max. 10,000 ignitions up to the end of the lamp's service life. For that reason, ELXe ballasts should only be used for applications demanding fewer than five lamp ignitions per day (e.g. in production sites, warehouses or department stores). The power factor of this device is approx. 0.98. As there is no need for preheating, ELXe ballasts usually require one connection per electrode for lamp operation. This makes them suitable for use in explosion protected luminaires. In addition, they are very energy-efficient as there are no lamp electrode losses. The average service life of these ballasts totals 50,000 hours with a failure rate of  $\leq 0.2\%$  per 1,000 operating hours.

### ELXc ballasts (warm start)

In contrast to the ELXs series, ELXc ballasts have a power factor of better than 0.95 and cover the complete capacity range.

ELXc ballasts ensure the lamp is started following a defined lamp electrode preheating period of approx. 1–2.5 seconds using a fixed ignition voltage. This particularly gentle lamp start makes over 20,000 lamp starts possible. ELXc ballasts should be used for applications with high switching frequencies (e.g. hotels or offices) where energy savings as well as low maintenance costs are desired. The average service life of these ballasts totals 50,000 hours with a failure rate of  $\leq 0.2\%$  per 1,000 operating hours. For series ECO-EffectLine and New T5 EffectLine the average service life totals 30,000 hours with a failure rate of  $\leq 0.2\%$  per 1,000 operating hours.

### ELXd ballasts (dimmable)

These are warm start ballasts with an additional dimming function that is controlled via an interface fitted to the ballast. The interface of these ballasts can be either analogue (1–10 Volt) or digital (DALI; PUSH); the interface enables lighting to be ideally adjusted to suit the given need. Control components can also be used as long as they comply with the respective standard (Annex to IEC/EN 60929). The power factor for these ballasts is  $> 0.95$  at 100% lamp operation. When using ELXd ballasts in a lighting system, an energy saving of 75% can be achieved if, for instance, the control inputs of the ballasts are coupled with movement detectors and light sensors. The average service life of these ballasts totals 50,000 hours with a failure rate of  $\leq 0.2\%$  per 1,000 operating hours.

To guarantee trouble-free operation and a long service life of the various types of electronic ballast, attention should be paid to the regulations and mounting instructions (page 245–252). In addition, the installation instructions for lighting systems must be observed when installing luminaires with electronic ballasts.

Mounting and installation instructions can be obtained from Vossloh-Schwabe on request or can be found online at [www.vossloh-schwabe.com](http://www.vossloh-schwabe.com).

## Mechanical mounting

Surface	Solid, flat surface for good heat dissipation required. Avoid mounting on protruding surfaces.
Mounting location	Electronic ballasts must be protected against moisture and heat. Installation in external luminaires: water protection rate of $\geq 4$ (e.g. IP54 required)
Fastening	With M4 screws in the designated holes
Heat transfer	If the ballast is destined for installation in a luminaire, sufficient heat transfer must be ensured between the ballast and the luminaire casing. Electronic ballasts should be mounted with the greatest possible clearance to heat sources or lamps. During operation, the temperature measured at the $t_c$ point of the ballast must not exceed the specified maximum value.

## Supplement for independent electronic ballasts

Mounting position	Any
Clearance	Min. of 0.10 m from walls, ceilings, insulation Min. of 0.10 m from other electronic ballasts Min. of 0.25 m from sources of heat (lamp)
Surface	Solid; device must not be allowed to sink into insulation materials

## Technical specifications

Operating voltage range	AC: 220 to 240 V ( $\pm 10\%$ ) DC: please observe the specifications on the individual product pages
Ignition time	ELXe ballasts $t < 0.5$ seconds (instant start)
Preheat time	ELXc, ELXs and ELXd ballasts $t = 0.5$ or $1.5$ to $2.5$ seconds (warm start)
Leak current	$\leq 0.5$ mA per electronic ballast

## Product features

Overheating	VS EBs for fluorescent lamps are not protected against overheating
Overvoltage protection	<b>AC:</b> up to 48 hours at $U_{NAC} = 320$ V and up to 2 hours at $U_{NAC} = 350$ V <b>DC:</b> no disorders occur with input voltages of up to $U_{NDC} 285$ V. $U_{NDC}$ voltages in excess of 288 V destroy the ballast.
Shutdown of defective lamps	During starting operation, the electronic ballast will detect whether a lamp is connected. If no lamp is present, the ballast will cancel the starting operation. Deactivated lamps or interrupted electrodes are detected and lead to the high-frequency supply being switched off after an unsuccessful ignition attempt. Changing a lamp during operation will lead to the high-frequency supply being switched off.

1

2

3

4

5

6

7

8

9

10

**EOL effect** Up to now, it has not been possible to conclusively reproduce the end-of-life effect under laboratory conditions. However, it can be qualitatively described for fluorescent lamps as follows: when the emitter material of the cathode (i.e. the filament in conventional bi-pin lamps) has been fully consumed or has otherwise lost its emitting power, the emission of electrons is hampered, which leads to a voltage drop at the cathode. Frequent cold starts accelerate active emitter loss.

Operating a lamp with a constant current (an electronic ballasts (EB) provides a near-constant current) results in high dissipation losses that also cause the lamp base and lampholder to heat up and can even cause damage to both. This is often referred to as the EOL effect; from an electrical point of view, this is manifested in the so-called "partial rectifier effect".

The EOL cut-out ensures that a ballast is safely switched off and the lamp base does not overheat at the end of a lamp's service life.

EN 61347-2-3 (A1:2004) describes three possible tests.

The first are now in widespread use and are described in more detail here.

The third test is not conducted at VS.

1. EOL Test 1 (61347-2-3:2000 + A1:2004 + A2:2006 17.2)

Asymmetric pulse test

2. EOL Test 2 (61347-2-3:2000 + A1:2004 + A2:2006 17.3)

Asymmetric power test

3. EOL Test 3 (61347-2-3:2000 + A1:2004 + A2:2006 17.4)

Exposed filament test

The first two tests attempt to simulate the rectifier effect:

- Test 1 pulse switching of rectifying effect
- Test 2 by applying a DC voltage that is constantly higher than required by the lamp.

VS EBs are capable of suitably assessing the altered voltage signal in comparison to normal operation so as to meet EOL requirements.

**Protection against transient mains peaks**

Values are in compliance with EN 61547 (interference immunity)

(1 kV for AC and 0.5 kV for DC and control conductors).

## Electrical installation

**Wiring**

The wiring between the mains, electronic ballast and lamp must comply with the respective circuit diagram. Note: with ELXe models, one side of the lamp electrode is never connected to the electronic ballast.

The electronic ballast must be earthed using a toothed washer or similar (protection class I, ignition help, compliance with RFI/BCI standards).

To ensure compliance with RFI-suppression limits, mains conductors should not be wired in parallel to high-frequency carrying lamp conductors; maximum clearance should be ensured and all conductors marked with an \* must be kept short. As a general rule, a maximum conductor length should not be exceeded when using conventional conductors (see table on page 256 - 259 for precise details). Luminaire must be tested for compliance with the RFI suppression limits stipulated by EN 55015.

Conductors must not exceed 3 m in length in the event of master-slave operation.

**Dimmable electronic ballasts are unsuitable for master/slave operation.**

## Through-wiring of mains voltage

ELXc 257.836 (188400) devices permit through-wiring of mains voltage

The following list specifies the maximum No. of devices that may be connected to the first device:

- 2 x 57 W = max. 3 devices
- 2 x 42 W = max. 4 devices
- 2 x 32 W = max. 5 devices
- 2 x 26 W = max. 7 devices

Mains power can be through-wired with the following devices:

- ELXc 213.874: max. 39 devices
- ELXc 218.875: max. 31 devices
- ELXc 142.876: max. 23 devices
- ELXc 242.877: max. 11 devices

The number of devices always refers to maximum-load operation. In addition, the maximum number of devices per installed automatic fuse must be strictly observed.

It is permissible to connect the protective conductor of the ballast by attaching the ballast to metal conductors that are connected to the protective conductor. In doing so, care must be taken to ensure the protective conductor is contacted in accordance with EN 60598. If, however, a ballast is fitted with a connection terminal for a protective conductor without through-wiring and if this is to be used to connect the protective conductor, this connection terminal may only be used for the ballast itself.

## Cord grip

EBs with cord grip can be used with the following conductors, for instance:

Designation	Lead type
Mains lead	H03VV-F 3X0.75 mm <sup>2</sup> or NYM 3X1.5 mm <sup>2</sup>
Control lead	H03VV-F 2X0.5 mm <sup>2</sup>
Mains and control lead in one lead	H03VV-F 5X0.75 mm <sup>2</sup>
Lamp lead	H05VV-F 4X1 mm <sup>2</sup> or 5X1 mm <sup>2</sup>

## Connection terminals for automatic luminaire wiring (ALF connections)

- Use copper (not stranded) wire
- Required diameter for push-in connection 0.5-1 mm<sup>2</sup>
- Stripped lead length 8-9 mm
- Required diameter for IDC 0.5 mm<sup>2</sup>, max. Ø 2 mm including insulation, no wire stripping required; mounting requires a special tool

## Push-in terminals

The integrated terminals can be used with flexible or rigid leads with a cross-section of 0.5-1.5 mm<sup>2</sup>. The stripped lead length ranges between 8.5-9.5 mm for a 3.5 mm terminal grid.

## Error current

Impulse-resistant leak-current protection must be installed. Distribute the luminaires to phases L1, L2 and L3; install tri-phase FI switches. If permissible, install FI switches with 30 mA leak current; connect no more than 15 luminaires as FI switches can be triggered at half the leak current value.

## Tri-phase connection of luminaires with EB

- Prior to operating newly installed lighting systems: check the mains voltage is appropriate to the electronic ballast's mains voltage range (AC, DC).
- The N-type conductor must be properly connected to all luminaires or ballasts.
- Conductors can only be connected or disconnected if the ballast is disconnected from the mains. Attention: N-type conductors must never be disconnected individually or as the first element.
- Insulation resistance test: from L to PE (L and N must not be connected)
- The neutral conductor must be reconnected after completion of the test.

1

2

3

4

5

6

7

8

9

10



## Power factor/compensation

Luminaires with electronic ballasts do not require compensation:

power factor  $\geq 0.95$ .

For ELXc ballast models 116.900, 116.903, 121.901, 121.904, 124.902, 124.905, 126.906 and 126.907: power factor  $\geq 0.6$ .

## Selection of automatic cut-outs

### Dimensioning automatic cut-outs

High transient currents occur when an EB is switched on because the capacitors have to load. Lamp ignition occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.

**Release reaction** The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B and C characteristics.

### No. of electronic ballasts (see the table on pages 256–259)

The maximum number of VS ballasts applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible ballasts must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 m $\Omega$  (approx. 20 m of conductor [2.5 m<sup>2</sup>] from the power supply to the distributor and a further 15 m to the luminaire). Doubling circuit impedance to 800 m $\Omega$  increases the possible number of ballasts by 10%.

**EB output voltage** Electronic ballasts bear the information "U<sub>OUT</sub>" on their type plates. All subsequently connected components must be designed for this EB output voltage. When using T5 lamps, any components connected to the output side of the EB must be approved for a voltage of  $\geq 430$  V (especially lampholders). This also applies to dimmable T5 EBs.

### Lamps and dimmed operation

For lighting systems with dimmable electronic ballasts, Vossloh-Schwabe recommends that fluorescent lamps always be replaced as a full complement to maintain uniform lighting levels and colour impressions. New lamps must be burnt in at maximum brightness for approx. 100 hours.

Without restrictions, VS electronic ballasts can be used to operate ECO T5 fluorescent lamps (except for with types ELXc 135.856 and ELXc 235.857) and T8 fluorescent lamps. A two-lamp dimmable electronic ballast can only be used with lamps of a single lamp manufacturer. The following EBs are restricted in their suitability for dimmer operation of amalgam lamps: ELXd 118.802, 218.803, 142.806, 242.807.

### Dimming interface

DC 1–10 V according to EN 60929 with power source 0.5 mA (protected in the event of mains voltage connection); designed to enable connection of control and regulation units.

Dimming range: 3–100% of lamp power

### DALI (Digital Addressable Lighting Interface) dimming interface

Polarity reversible dimmer interface – protected in accordance with EN 60929 given mains voltage supply – for connecting control devices that work according to the standard digital protocol. Dimming range: 1–100% of the lamp's rating

### Potential interference with IR systems

Operating lamps at frequencies of 20 to 50 kHz can cause interference with infrared systems (remote controls, sound transmission, personal pager systems). Countermeasures: optical filters, switching to infrared systems with higher carrier frequencies (over 400 kHz).

## Electromagnetic Compatibility (EMC)

Vossloh-Schwabe's electronic ballast range was developed in accordance with valid EMC standards (interference, interference immunity and mains harmonics) and specially designed to ensure safe compliance with the limiting values.

It is assumed that any remarks regarding conductor wiring and conductor length in the instructions for installing electronic ballasts in luminaires or for independent ballasts will be observed.

Vossloh-Schwabe electronic ballasts are also tested in commercially available luminaires in addition to the CISPR 30 sample luminaires.

- ELXs devices: The ELXs device family was developed for system ratings of  $\leq 25$  W on the basis of the limiting values prescribed for this in EN 61000-3-2. Vossloh-Schwabe's ELXs devices all bear the VDE EMC mark and comply with the limiting values laid down by EN 61000-3-2.

It is possible to use several ELXs ballasts in a luminaire if a separate connection terminal is available for each lamp circuit.

Mains harmonics: the maximum values laid down in EN 61547 (Interference Immunity) are satisfied.

## Additional information

### Information on the installation of electronic ballasts for optimising EMC

To ensure good radio interference suppression and the greatest possible operating safety, the following points should be observed when installing electronic ballasts:

- Conductors between the EB and the lamp (HF conductors) must be kept short (reduction of electromagnetic interference). High-potential lamp conductors must be kept as short as possible, in particular with tubular lamps. Lamp conductors of this kind are labelled with an \* in the wiring diagram on the type plate (see page 256–259).
- Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another. The distance between HF and mains conductors should be as large as possible, ideally  $> 5$  cm. (This prevents the induction of interference between the mains and lamp conductors.)
- The mains conductor within the luminaire must be kept short (to reduce the induction of interference).
- Devices must be properly earthed. EBs require secure contacts to the luminaire casing or must be earthed using a PE connection. This PE connection should be effected using an independent conductor to achieve better dissipation of the leak current. EMC improves at frequencies greater than 30 MHz.
- The mains conductor must not be laid too close to the EB or the lamp (this is especially important in the event of through-wiring).
- Mains and lamp conductors must not be crossed. Should this be impossible to avoid, conductors should be crossed at right angles to one another to avoid inducing interference between mains and HF conductors.
- Should conductors be wired through metal parts, such conductors must always be additionally shielded (e.g. with an insulating sleeve or grommet).

## Temperature

### Reference point temperature $t_c$

The safe operation of electronic ballasts is dependent on the maximum permissible temperature not being exceeded at the measuring point. Vossloh-Schwabe has determined a casing temperature measuring point –  $t_{c\ max}$  – on all EB casings. To avoid shortening the service life or diminishing operating safety, the stipulated maximum temperature must not be exceeded at this  $t_c$  point. This point is determined by testing the convertor during normal, IEC-standardised operation at the specified ambient temperature ( $t_a$ ), which is also indicated on the type plate. As both the design-related ambient temperature and the ballast's inherent heat, as determined by the installed load, are subject to great variation, the casing temperature should be tested at the  $t_c$  point under real installation conditions.

1

2

3

4

5

6

7

8

9

10

## Ambient temperature $t_a$

The ambient temperature – as specified on every EB – denotes the permissible temperature range within the luminaire.

## Reliability and service life

If the max. temperature at the  $t_c$  reference point (as specified on the type plate and the technical documentation of the ballast) is not exceeded, the defined service life can be expected to be achieved, assuming a switching cycle of 165 minutes on and 15 minutes off.

See page 246 for service life details regarding the various electronic ballast families.

## Emergency lighting

All Vossloh-Schwabe EBs that are suitable for DC voltage operation can be used in emergency lighting systems. Consideration must, however, be taken of system requirements.

## VS Dimmable Electronic Ballasts

Vossloh-Schwabe's range of electronic ballasts is rounded off by dimmable ballasts for fluorescent lamps. The standardised interfaces "1-10 V" and "DALI" are used for this purpose. Coupled with sensors, electronic ballasts fitted with a "1-10 V" interface make it easy to create intelligent luminaires and room lighting systems, whereby the luminaires are "programmed" via the wiring to the control units, i.e. via the hardware.

The digital interface "DALI" (Digital Addressable Lighting Interface) constitutes a further development of the "1-10 V" analogue interface. This digital interface was jointly developed by leading manufacturers of electronic ballasts in order to create a uniform standard for the lighting industry. The uniform interface and telegram definition dictates the function of a DALI operating device or DALI consumer and ensures exchangeability of operating devices made by various manufacturers.

Each VS DALI ballast is additionally fitted with the so-called PUSH function. The data input DA (DALI & PUSH) is used as a control input for both signal structures, with the exception of devices featuring separate inputs. When used as a DALI ballast, control is effected via the DALI protocol; when used as a PUSH ballast, control is effected via a push key and is achieved via current flow times of differing duration.

Due to the working principle involved, dimming compact fluorescent lamps causes a negligible drop in colour temperature. However, sudden larger changes in the dimmer setting can temporarily cause greater variation in colour temperature. The dimmer function is optimised to minimise this subjective visual change in colour temperature when the dimmer setting is suddenly subjected to larger change.

### VS DALI electronic ballasts are characterised by the following performance feature

- Two-strand, potential-free, polarity-independent control input
- Dimmer curve analogue to the light sensitivity of the human eye
- Addressing options: total system, group-wise or individually
- Scene memory
- Feedback in the event of defective lamps

These features ensure a number of advantages for lighting systems

- No group wiring needed
- Each DALI ballast can be individually addressed
- No need for scene memory modules
- Synchronised scene transitions
- Operating devices provide reports on lamp status
- Simple integration into facility management systems



**VS DALI electronic ballasts provide the convenience of a bus system that is both easy to install and operate.**

**DALI and PUSH must not be used at the same time!**

**Switching mains voltage to the DALI conductors within a DALI system will lead to the destruction of both the DALI power supply and the DALI master!**

## PUSH function characteristic

- Just one key for dimming and ON/OFF
- Polarity- and phase-independent control
- Control input with large working voltage range
- Suitable for multi-layer control
- Fully DC-compatible – no functional restrictions during DC operation
- After disconnection from the primary voltage the ballast will reproduce the last stored lighting level
- Soft start
- Automatic recognition of DALI and PUSH signals

## PUSH operating voltage ranges during control signal input

EB type	ELXd 117.715, ELXd 217.717, ELXd 118.705, ELXd 218.707, ELXd 142.709, ELXd 242.711	All other DALI/PUSH ballasts
AC	220-240 V ±10%	10-230 V
DC	198-264 V	–
Failing to observe these working voltage ranges can lead to non-recognition of the signals; exceeding the maximum voltages can lead to the destruction of the data inputs.		

## PUSH control signals (key activation)

Short push	(80 ms < t < 460 ms)	(0 ms < t < 500 ms)
	Is used to switch between ON/OFF lighting states. After the device is switched on, the last selected lighting level is restored and the next dimming direction will be upwards.	
Long push	(460 ms < t < 10 s)	(500 ms < t < ∞)
	Is used to dim upwards or downwards; a long push will change the dimming direction. Thus, a long push will reverse the dimming direction until the upper or lower limit is reached. If the light was off, a long push will switch it on and the dimmer will start at the lowest light intensity.	
Push to synchronise	(t > 10 s)	long - short - long
	Light is dimmed to the preset factory level and the next dimming direction will be upwards.	Starting situation: luminaires are switched off. The "long - short - long" combination first switches the lamp on, then off and finally on again, after which it gets gradually brighter. The EBs will be synchronised again after this procedure.
Synchronisation	Any 1-key dimmer that does not feature a central control module (as each ballast will have its own controls) can develop asynchronous behaviour (e.g. children might play with the key). The system will then be out of sync, i.e. some lamps will be on, others off or the dimming direction will differ from lamp to lamp.	
	Two methods of synchronisation can be used:	
	<ul style="list-style-type: none"> <li>• Push the key for more than 10 seconds, after which the light will be dimmed to a preset level and the next dimming direction will be upwards.</li> <li>• Start with a long push of the key so that all lamps are switched on. Follow with a short push to turn the system off. The system will now be resynchronised.</li> </ul>	

1

2

3

4

5

6

7


8

9


10

## Wiring examples for PUSH function


**Note** **Not permissible:** N-type conductors must not be used as PUSH potentials for multi-phase systems. Example: if the PUSH key is not activated, the series connection of the internal resistors of the DA inputs will approach the delta voltage of 400 V (voltage between L2 and L3) (Fig. 1).

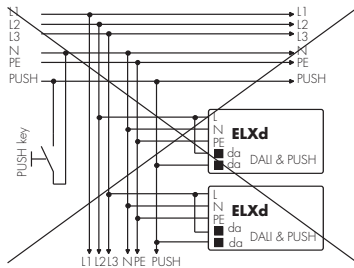

**Fig. 1**  
N conductor must not be used as a PUSH potential

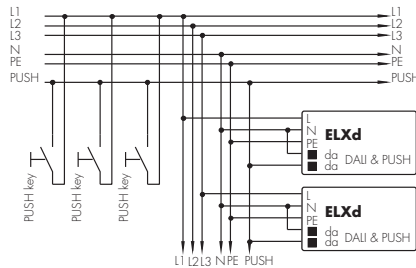

**Fig. 2**  
Standard application for T5 and T8 lamps

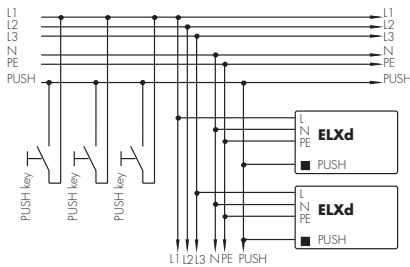

**Fig. 3**  
Standard application for TC lamps

## General information on PUSH and DALI

Mains voltage and interface conductors must not be wired in parallel to the lamp conductors so as to avoid capacitive bridging of the mains filter.

If more than one device is operated with a single key during PUSH operation, asynchronous behaviour can occur, which will require manual resynchronisation using the method described. Should this be unacceptable, a DALI control module will have to be used instead. It is recommended not to control more than four devices using a single key.

When using dimmable devices, new lamps should generally be burnt in for at least 100 hours at full brightness before they are dimmed. This process can become necessary again should the lamps be physically relocated (e.g. transport).

After initial operation of a DALI system (address assignment, luminaire allocation, group formation, scene settings) it is recommended to disconnect the primary voltage of the DALI control units at the circuit breaker for at least 3 seconds and then to reconnect it. The devices will detect this disconnection from the mains and store the settings.

DALI devices with a PUSH function must be operated with a control module (DALI control module or key pad with PUSH function). DALI devices with a PUSH function must not be operated with an open or bridged DALI/PUSH input.


To ensure the ballast does not distort and misinterpret signals when operated in PUSH mode, connected PUSH buttons must not feature a control lamp.

## Circuit diagrams for Vossloh-Schwabe electronic ballasts

The circuit diagrams shown here are wiring examples for Vossloh-Schwabe electronic ballasts, whereby the number and configuration of the contacts differ. See the table on page 256-259 for details.

EB	1 lamp	2 lamps	3 lamps	4 lamps
ELXd		<p>Linear ballast shape*</p> <p>Compact ballast shape</p>		
ELXc				
ELXs				

\* ELXc devices can also be wired under observation of the circuit diagram on the ballast.




## Explanation of circuit diagrams for Vossloh-Schwabe electronic ballasts (see page 255)

Electronic ballasts Ref. No.	Lamp Type	Electronic ballasts Quantity	Electronic ballasts Terminals															Max. lead length		Operation frequency kHz	Output voltage U <sub>OUT</sub> V	THD %	Possible quantity of EB/automatic cut-outs			
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	hot* (m/pf)	cold (m/pf)				B (10A)	B (16A)	C (10A)	C (16A)
183039	ELXc 424.223	3	x*	x*	-	x	x	x	x	-	-	x	x	-	-	-	1/100	2/200	44	400	< 10	9	14	14	22	
			x*	x*	-	x	x	x	x	x	x	x	x	x	-	-	-	1/100	2/200	44	400	< 10	9	14	14	22
183040	ELXc 226.878	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	45	300	< 10	11	18	18	30	
			x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	-	1/100	1.5/150	45	300	< 10	11	18	18	30
183094	ELXc 328.224	3	x*	x*	x	x	x	x	x*	x*	x	x	-	-	-	1/100	1.5/150	43	250	< 10	10	16	17	28		
183103	ELXc 135.225	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	1/100	2/200	48	250	< 10	11	18	18	30		
183104	ELXc 136.226	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	1/100	2/200	44	250	< 10	11	18	18	30		
183108	ELXc 226.878	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	45	300	< 10	11	18	18	30		
			x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	45	300	< 10	11	18	18	30	
183109	ELXc 414.227	3	x*	x*	x	x	x	x	x	x	x*	x*	-	-	-	1/100	2/200	45	350	< 15	7	12	12	20		
			x*	x*	x	x	x	x	x	x	x	x	x*	x*	-	-	-	1/100	2/200	45	350	< 15	7	12	12	20
183110	ELXc 424.228	3	x*	x*	x	x	x	x	x	x	x*	x*	-	-	-	1/100	2/200	47	350	< 15	7	12	12	20		
			x*	x*	x	x	x	x	x	x	x	x	x*	x*	-	-	-	1/100	2/200	47	350	< 15	7	12	12	20
183111	ELXc 228.229	1	x*	x*	x	x	x	x	-	-	-	-	-	-	-	1/100	2/200	47	350	< 15	9	15	15	25		
			x*	x*	x	x	x	x	-	-	-	-	-	-	-	-	1/100	2/200	47	350	< 20	9	15	15	25	
183112	ELXc 328.230	2	x*	x*	x	x	x	x	x	x	x*	x*	-	-	-	1/100	2/200	45	350	< 15	7	12	12	20		
			x*	x*	x	x	x	x	x	x	x	x	x*	x*	-	-	-	1/100	2/200	45	350	< 15	7	12	12	20
183113	ELXc 135.231	1	x*	x*	x	x	-	-	-	-	-	-	-	-	1/100	2/200	47	400	< 15	11	18	18	30			
183114	ELXc 235.232	2	x	x	x*	x*	x*	x*	-	-	-	-	-	-	1/100	2/200	46	400	< 15	9	15	15	25			
183115	ELXc 239.233	1	x*	x*	x	x	x	x	-	-	-	-	-	-	1/100	2/200	47	350	< 15	7	12	12	20			
			x*	x*	x	x	x	x	-	-	-	-	-	-	-	1/100	2/200	47	350	< 15	7	12	12	20		
183116	ELXc 149.234	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	47	250	< 15	9	15	15	25				
183117	ELXc 249.235	2	x	x	x*	x*	x*	x*	-	-	-	-	-	1/100	2/200	47	350	< 15	7	12	12	20				
183118	ELXc 254.236	1	x*	x*	x	x	x	x	-	-	-	-	-	-	1/100	2/200	48	350	< 15	7	12	12	20			
			x*	x*	x	x	x	x	x	x	-	-	-	-	-	1/100	2/200	48	350	< 15	7	12	12	20		
183119	ELXc 180.237	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	46	350	< 15	9	15	15	25				
183122	ELXc 114.238	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	380	< 20	8	17	17	28				
183123	ELXc 128.239	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	380	< 20	8	17	17	28				
183124	ELXc 214.240	2	x	x	x	x	x*	x*	x*	-	-	-	-	1/100	2/200	45	380	< 20	8	17	17	28				
183125	ELXc 228.241	2	x	x	x	x	x*	x*	x*	-	-	-	-	1/100	2/200	45	380	< 20	4	7	7	12				
183126	ELXc 414.242	4	x*	x*	x	x	x	x	x	x	x	x*	x*	-	1/100	2/200	45	430	< 20	4	7	7	12			
183127	ELXc 118.243	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	390	< 20	8	17	17	28				
183128	ELXc 136.244	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	390	< 20	8	17	17	28				
183129	ELXc 158.245	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	390	< 20	4	7	7	12				
183130	ELXc 218.246	2	x*	x*	x	x	x	x	-	-	-	-	-	1/100	2/200	45	390	< 20	8	17	17	28				
183131	ELXc 236.247	2	x*	x*	x	x	x	x	-	-	-	-	-	1/100	2/200	45	390	< 20	4	7	7	12				
183132	ELXc 258.248	2	x*	x*	x	x	x*	x*	x	-	-	-	-	1/100	2/200	45	390	< 20	2	5	5	8				
183133	ELXc 418.249	4	x*	x*	x	x	x	x	x	x	x*	x*	-	1/100	2/200	45	390	< 20	4	7	7	12				
183134	ELXc 118.879	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	380	< 20	8	17	17	28				
183135	ELXc 126.880	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	380	< 20	8	17	17	28				
183136	ELXc 218.881	2	x*	x*	x	x	x*	x*	-	-	-	-	-	1/100	2/200	45	380	< 20	4	7	7	12				
183137	ELXc 226.882	2	x*	x*	x	x	x*	x*	-	-	-	-	-	1/100	2/200	45	380	< 20	4	7	7	12				
183150	ELXc 118.879	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	380	< 20	8	17	17	28				
183151	ELXc 126.880	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	380	< 20	8	17	17	28				
183152	ELXc 218.881	2	x*	x*	x	x	x*	x*	-	-	-	-	-	1/100	2/200	45	380	< 20	4	7	7	12				
183153	ELXc 226.882	2	x*	x*	x	x	x*	x*	-	-	-	-	-	1/100	2/200	45	380	< 20	4	7	7	12				
188093	ELXc 135.856	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	44	330	< 10	11	18	18	30				
188094	ELXc 235.857	2	x*	x*	x	x	x	x*	x*	-	-	-	-	1/100	2/200	45	330	< 10	9	15	15	25				
188095	ELXc 149.858	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	28	330	< 10	11	18	18	30				
188140	ELXc 140.862	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	250	< 10	11	18	18	30				
188142	ELXc 154.864	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	34	300	< 10	9	15	15	25				
188144	ELXc 180.866	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	2/200	45	300	< 10	9	15	15	25				
188400	ELXc 257.836	2	x*	x*	x	x	x*	x*	-	-	-	-	-	1/100	1.5/150	47	350	< 10	7	12	12	20				
188438	ELXc 414.868	3	x*	x*	-	x	x	x	x	-	-	x	x	-	1/100	2/200	45	400	< 10	7	12	12	20			
			x*	x*	-	x	x	x	x	x	x	x	x	x	-	1/100	2/200	45	400	< 10	7	12	12	20		
188589	ELXc 128.869	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	1.5/150	54	450	< 10	11	18	18	30				
188590	ELXc 128.869	1	x*	x*	x	x	-	-	-	-	-	-	-	1/100	1.5/150	54	450	< 10	11	18	18	30				
188595	ELXc 336.214	3	x	x	x	x	x	x	x*	x*	-	-	-	1/100	2/200	70	370	< 10	6	11	11	18				
188616	ELXc 240.863	2	x*	x*	x	-	x	x	x	-	-	-	-	1/100	2/200	46	360	< 15	7	12	12	20				
188617	ELXc 249.859	2	x*	x*	x	x	x	x*	x*	-	-	-	-	1/100	2/200	43	480	< 10	7	12	12	20				

# Technical Details – Components for Fluorescent Lamps

Ref. No.	Lamp Type	Quantity	Electronic ballasts															Max. lead length hot*	cold	Operation frequency	Output voltage U <sub>OUT</sub>	THD	Possible quantity of EB/automatic cut-outs			
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15						B	B	C	C
<b>ELXc</b>																										
188618	ELXc 254.865	2	x*	x*	x	-	x	x	x	-	-	-	-	-	-	-	1/100	2/200	43	390	< 10	7	12	12	20	
188619	ELXc 280.538	2	x*	x*	x	x	x	x*	x*	-	-	-	-	-	-	-	1/100	2/200	50	420	< 10	-	10	-	10	
188643	ELXc 242.837	2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	43	440	< 15	7	12	12	20	
188680	ELXc 155.378	1	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	1/100	1.5/150	47	250	< 15	7	12	12	20	
188681	ELXc 155.378	1	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	1/100	1.5/150	47	250	< 15	7	12	12	20	
188682	ELXc 170.833	1	x*	x*	-	-	x	x	-	-	-	-	-	-	-	-	1/100	1.5/150	44	350	< 10	7	12	12	20	
188683	ELXc 170.833	1	x*	x*	-	-	x	x	-	-	-	-	-	-	-	-	1/100	1.5/150	44	350	< 10	7	12	12	20	
188687	ELXc 242.837	2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	43	440	< 15	7	12	12	20	
188698	ELXc 213.870	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	42	250	< 20	11	18	18	30	
		2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	42	250	< 20	11	18	18	30	
188699	ELXc 218.871	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	35	350	< 12	11	18	18	30	
		2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	35	350	< 12	11	18	18	30	
188700	ELXc 142.872	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	44	480	< 15	11	18	18	30	
		2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	44	480	< 15	11	18	18	30	
188704	ELXc 136.207	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	-	-	48	350	< 20	11	18	18	30	
188705	ELXc 236.208	2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	45	250	< 20	11	18	18	30	
188706	ELXc 158.209	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	-	-	33	250	< 20	9	15	15	25	
188707	ELXc 258.210	2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	48	350	< 20	7	12	12	19	
188708	ELXc 136.207	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	-	-	48	350	< 20	11	18	18	30	
188709	ELXc 236.208	2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	45	250	< 20	11	18	18	30	
188710	ELXc 158.209	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	-	-	33	250	< 20	9	15	15	25	
188711	ELXc 258.210	2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	48	350	< 20	7	12	12	19	
188712	ELXc 213.870	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	42	250	< 20	11	18	18	30	
		2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	42	250	< 20	11	18	18	30	
188713	ELXc 218.871	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	35	350	< 12	11	18	18	30	
		2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	35	350	< 12	11	18	18	30	
188714	ELXc 142.872	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	44	480	< 15	11	18	18	30	
		2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	44	480	< 15	11	18	18	30	
188744	ELXc 418.204	3	x*	x*	-	x	x	x	x	-	-	x	x	-	-	-	1/100	2/200	44	480	< 10	7	12	12	20	
		4	x*	x*	-	x	x	x	x	x	x	x	x	-	-	-	1/100	2/200	44	480	< 10	7	12	12	20	
188868	ELXc 136.216	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	47,5	430	< 20	17	28	28	46	
188869	ELXc 236.217	2	x*	x*	x	x	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	45	430	< 10	8	13	13	21	
188870	ELXc 158.218	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	34	430	< 10	12	19	19	31	
188871	ELXc 258.219	2	x*	x*	x	x	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	52	430	< 10	8	13	13	21	
188886	ELXc 213.874	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	44	250	< 10	11	18	18	30	
		2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	44	250	< 10	11	18	18	30	
188887	ELXc 218.875	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	37	350	< 10	11	18	18	30	
		2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	37	350	< 10	11	18	18	30	
188888	ELXc 142.876	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	44	480	< 10	11	18	18	30	
		2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	44	480	< 10	11	18	18	30	
188889	ELXc 242.877	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	45	480	< 10	7	12	12	20	
		2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	45	480	< 10	7	12	12	20	
188912	ELXc 136.216	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	47,5	430	< 20	17	28	28	46	
188913	ELXc 236.217	2	x*	x*	x	x	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	45	430	< 10	17	28	28	46	
188914	ELXc 158.218	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	34	430	< 10	17	28	28	46	
188915	ELXc 258.219	2	x*	x*	x	x	x*	x*	-	-	-	-	-	-	-	-	1/75	1.5/100	52	430	< 10	17	28	28	46	
188921	ELXc 135.220	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	1/100	2/150	41	300	< 10	11	18	18	30	
188922	ELXc 235.221	2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	1/100	2/150	41	300	< 10	11	18	18	30	
188945	ELXc 139.632	1	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	1/75	2/150	42-85	330	< 15	17	28	29	47	
188946	ELXc 149.633	1	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	1/75	2/150	42-85	330	< 10	17	28	29	47	
188947	ELXc 180.634	1	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	1/75	2/150	42-85	330	< 10	8	13	13	22	
188948	ELXc 239.635	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/75	2/150	42-85	330	< 10	8	13	13	22	
188949	ELXc 249.636	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/75	2/150	42-85	330	< 7	8	13	13	22	
188950	ELXc 280.637	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/75	2/150	45-70	330	< 10	5	9	9	15	
<b>ELXd</b>																										
183059	ELXd 235.735	2	x*	x*	x	x	x	x*	x*	-	-	-	-	-	-	-	1/100	2/200	42	300	< 5	10	17	18	28	
188276	ELXd 170.808	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	0.5/50	0.75/75	50-90	470	< 10	7	12	12	20	
188329	ELXd 124.600	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	76-120	430	< 10	17	28	28	46	
188330	ELXd 224.601	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	53-120	430	< 10	17	28	28	46	
188331	ELXd 139.602	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	85-120	430	< 10	17	28	28	46	
188332	ELXd 154.603	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	83-120	430	< 10	17	28	28	46	
188333	ELXd 254.604	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	44-120	430	< 10	8	13	13	21	
188334	ELXd 180.605	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	91-120	430	< 10	12	19	19	31	





# Technical Details - Components for Fluorescent Lamps

Electronic ballasts		Lamp Quantity	Electronic ballasts Terminals															Max. lead length		Operation frequency	Output voltage U <sub>OUT</sub>	THD	Possible quantity of EB/automatic cut-outs			
Ref. No.	Type		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	hot*	cold				B	B	C	C
<b>ELXd</b>																										
188335	ELXd 249.606	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	44-120	430	< 10	8	13	13	21	
188336	ELXd 124.607	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	76-120	430	< 10	17	28	28	46	
188337	ELXd 224.608	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	53-120	430	< 10	17	28	28	46	
188338	ELXd 139.609	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	85-120	430	< 10	17	28	28	46	
188339	ELXd 239.610	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	53-120	430	< 10	17	28	28	46	
188340	ELXd 154.611	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	83-120	430	< 10	17	28	28	46	
188341	ELXd 254.612	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	44-120	430	< 10	8	13	13	21	
188342	ELXd 180.613	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	91-120	430	< 10	12	19	19	31	
188343	ELXd 249.614	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	44-120	430	< 10	8	13	13	21	
188344	ELXd 118.615	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	51-120	300	< 10	17	28	28	46	
188345	ELXd 218.616	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	51-120	300	< 10	12	19	19	31	
188346	ELXd 136.617	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	48-120	430	< 10	17	28	28	46	
188347	ELXd 236.618	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	48-120	430	< 10	17	28	28	46	
188348	ELXd 158.619	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	1/100	1.5/150	46-120	430	< 10	17	28	28	46	
188349	ELXd 258.620	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	46-120	430	< 10	8	13	13	21	
188350	ELXd 239.621	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	53-120	430	< 10	17	28	28	46	
188431	ELXd 226.801	2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.75/75	50-90	470	< 10	7	12	12	20	
188490	ELXd 226.801	2	x	x	x	x	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.75/75	50-90	470	< 10	7	12	12	20	
188495	ELXd 170.808	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	0.5/50	0.75/75	50-90	470	< 10	7	12	12	20	
188549	ELXd 218.803	2	x*	x*	x	x	x	x*	x*	-	-	-	-	-	-	-	0.5/50	0.75/75	60-99	300	< 10	11	18	18	30	
188550	ELXd 242.807	2	x*	x*	x	x	x	x*	x*	-	-	-	-	-	-	-	0.5/50	0.75/75	45-95	400	< 10	7	12	12	20	
188564	ELXd 118.802	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.75/75	60-105	400	< 10	11	18	18	30	
188565	ELXd 142.806	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.75/75	40-95	400	< 10	11	18	18	30	
188596	ELXd 318.622	3	-	x*	x*	x*	x*	x*	x*	-	-	-	x*	x*	x*	x*	0.5/50	-	45-120	430	< 10	17	28	28	46	
188597	ELXd 324.623	3	-	x*	x*	x*	x*	x*	x*	-	-	-	x*	x*	x*	x*	0.5/50	-	67-120	430	< 10	8	13	13	21	
188598	ELXd 424.624	4	-	x*	x*	x*	x*	x*	x*	x*	-	-	x*	x*	x*	x*	0.5/50	-	45-120	430	< 10	8	13	13	21	
188599	ELXd 418.625	4	-	x*	x*	x*	x*	x*	x*	x*	-	-	x*	x*	x*	x*	0.5/50	-	45-120	430	< 10	12	19	19	31	
188600	ELXd 324.626	3	-	x*	x*	x*	x*	x*	x*	-	-	-	x*	x*	x*	x*	0.5/50	-	67-120	430	< 10	8	13	13	21	
188601	ELXd 318.627	3	-	x*	x*	x*	x*	x*	x*	-	-	-	x*	x*	x*	x*	0.5/50	-	45-120	430	< 10	17	28	28	46	
188602	ELXd 424.628	4	-	x*	x*	x*	x*	x*	x*	x*	-	-	x*	x*	x*	x*	0.5/50	-	45-120	430	< 10	8	13	13	21	
188603	ELXd 418.629	4	-	x*	x*	x*	x*	x*	x*	x*	-	-	x*	x*	x*	x*	0.5/50	-	45-120	430	< 10	12	19	19	31	
188604	ELXd 280.630	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	44-120	430	< 10	5	9	9	15	
188605	ELXd 280.631	2	x	x	x	x*	x*	x*	x*	-	-	-	-	-	-	-	1/100	1.5/150	44-120	430	< 10	5	9	9	15	
188694	ELXd 118.802	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.75/75	60-105	400	< 10	11	18	18	30	
188695	ELXd 142.806	1	x	x	-	-	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.75/75	40-95	400	< 10	11	18	18	30	
188696	ELXd 218.803	2	x*	x*	x	x	x	x*	x*	-	-	-	-	-	-	-	0.5/50	0.75/75	60-99	300	< 10	11	18	18	30	
188697	ELXd 242.807	2	x*	x*	x	x	x	x*	x*	-	-	-	-	-	-	-	0.5/50	0.75/75	45-95	400	< 10	7	12	12	20	
188717	ELXd 135.823	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	1.0/75	1.5/100	45	420	< 10	30	50	30	50	
188864	ELXd 117.715	1	-	-	x*	x*	x*	x*	-	-	-	-	-	-	-	-	0.5/50	1.5/150	47-80	400	< 10	10	15	15	25	
188865	ELXd 117.715	1	-	-	x*	x*	x*	x*	-	-	-	-	-	-	-	-	0.5/50	1.5/150	47-80	400	< 10	10	15	15	25	
188866	ELXd 217.717	2	x*	x*	x*	x*	x*	x*	x*	-	-	-	-	-	-	-	0.5/50	1.5/150	34-94	250	< 10	11	18	18	30	
188867	ELXd 217.717	2	x*	x*	x*	x*	x*	x*	x*	-	-	-	-	-	-	-	0.5/50	0.5/50	34-94	250	< 10	11	18	18	30	
188873	ELXd 118.718	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	1.5/150	2.0/200	55-113	300	< 5	15	24	25	40	
188874	ELXd 218.719	2	x*	x*	x	x	x	x*	x*	-	-	-	-	-	-	-	1.5/150	2.0/200	42-114	400	< 5	17	27	28	46	
188875	ELXd 136.720	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	1.5/100	2.0/200	47-105	300	< 5	15	24	25	40	
188876	ELXd 236.721	2	x*	x*	x	x	x	x*	x*	-	-	-	-	-	-	-	1.5/100	2.0/200	42-107	400	< 5	17	27	27	44	
188877	ELXd 158.722	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	1.5/100	2.0/200	47-105	300	< 8	15	24	25	40	
188878	ELXd 258.723	2	x*	x*	x	x	x	x*	x*	-	-	-	-	-	-	-	1.5/150	2.0/200	45-110	400	< 10	11	18	19	31	
188923	ELXd 142.709	1	-	-	x*	x*	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.5/50	41-104	400	< 10	8	12	12	20	
188924	ELXd 142.709	1	-	-	x*	x*	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.5/50	41-104	400	< 10	8	12	12	20	
188932	ELXd 135.724	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	1/100	2/200	43	330	< 10	11	17	18	29	
188933	ELXd 235.725	2	x*	x*	x	x	x	x*	x*	-	-	-	-	-	-	-	1/100	2/200	43	330	< 5	10	17	18	28	
188952	ELXd 118.705	1	-	-	x*	x*	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.5/50	47	250	< 10	13	20	21	34	
188953	ELXd 118.705	1	-	-	x*	x*	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.5/50	47	250	< 10	13	20	21	34	
188954	ELXd 218.707	2	x*	x*	x*	x*	x*	x*	x*	-	-	-	-	-	-	-	0.5/50	0.5/50	41	250	< 10	12	20	21	33	
188955	ELXd 218.707	2	x*	x*	x*	x*	x*	x*	x*	-	-	-	-	-	-	-	0.5/50	0.5/50	41	250	< 10	12	20	21	33	
188974	ELXd 242.711	2	x*	x*	x*	x*	x*	x*	x*	-	-	-	-	-	-	-	0.5/50	0.5/50	40	250	< 10	12	20	21	33	
188975	ELXd 242.711	2	x*	x*	x	x*	x*	x*	-	-	-	-	-	-	-	-	0.5/50	0.5/50	40	250	< 10	12	20	21	33	
<b>ELXs</b>																										
188661	ELXs 116.900	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	1/100	2/150	43	250	-	27	43	44	72	
188662	ELXs 116.903	1	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	1/100	2/150	43	250	-	27	43	44	72	
188663	ELXs 121.901	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	1/100	2/150	40	250	-	54	86	88	148	
188664	ELXs 121.904	1	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	1/100	2/150	40	250	-	54	86	88	148	

Electronic ballasts		Lamp	Electronic ballasts													Max. lead length		Operation	Output	THD	Possible quantity of EB/automatic cut-outs				
Ref. No.	Type	Quantity	Terminals													hot*	cold	frequency	voltage U <sub>OUT</sub>		EB/automatic cut-outs				
			1	2	3	4	5	6	7	8	9	10	11	12	13						14	15	B	B	C
<b>ELXs</b>																									
188665	ELXs 124.902	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	1/100	2/150	47	250	-	54	86	88	148
188666	ELXs 124.905	1	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	1/100	2/150	47	250	-	54	86	88	148
188667	ELXs 126.906	1	x*	x*	x	x	-	-	-	-	-	-	-	-	-	-	1/100	2/150	42	250	-	27	43	44	72
188668	ELXs 126.907	1	x	x	x*	x*	-	-	-	-	-	-	-	-	-	-	1/100	2/150	42	250	-	27	43	44	72

## Electromagnetic ballasts

Electromagnetic (inductive) ballasts are active components that in conjunction with starters preheat the lamp electrodes, supply the ignition voltage and stabilise lamp currents during operation. Series or parallel capacitors are required to compensate blind current.

For installation in luminaires, consideration must be taken of the mains voltage and mains frequency, the dimensions and maximum thermal values as well as any potential noise generation. To fulfil these special requirements, Vossloh-Schwabe provides a large variety of different ballasts.

VS magnetic ballasts have been optimised with regard to their magnetic fields and loads so that usually so that noise cannot usually be perceived. However, the luminaire design can cause magnetic vibrations to affect large areas. When designing luminaires, it might therefore be necessary to fit a concertina section or grooves to prevent vibrations from spreading and thus from noise being generated.

The service life of an inductive ballast is mainly determined by the material chosen for the winding insulation. The maximum winding temperature denotes the temperature (tw) that the insulation will withstand for a period of 10 years given continuous operation under rated conditions. This maximum winding temperature must not be exceeded in real conditions to ensure the ballast can achieve its full service life. The winding temperature of the ballast that is measured in the luminaire is made up of the ambient temperature of the luminaire, the thermal conditions within the luminaire and the power loss of the ballast. The  $\Delta t$  marking on the ballast type plate provides a measure of the power loss of the ballast. In addition to this, the power loss of ballast-lamp circuits is measured in accordance with EN 50294. This test method forms the basis for the CELMA energy classification of ballasts and is also applied in European Regulation 245/2009/EG "Definition of eco-design requirements regarding fluorescent lamps without an integrated ballast, high-pressure discharge lamps as well as ballasts and luminaires in their operation and the invalidation of Directive 2000/55/EC" (see pages 269-271 for further details).

As a result of their design features, inductive ballasts cause leak current that is discharged via the earth conductor of the luminaire. The maximum permissible leak current for protection class I luminaires is 1 mA, a value of which all Vossloh-Schwabe electronic ballasts fall clearly short. Values of max. 0.1 mA are measured per electromagnetic ballast. However, as these values accumulate with the number of installed ballasts, this should be taken into account when dimensioning the F1 protective switch.

1

2

3

4

5

6

7

8

9

10

## Starters for fluorescent lamps

As mentioned above, the operation of fluorescent lamps also requires starters in addition to ballasts. A distinction is made between glow starters, which are also available with automatic cut-outs, and electronic starters. The correct choice of voltage and power range is crucial. Starters are available for 220–240 V and for 110–127 V mains voltage. The latter are also required for twin-lamp operation (e.g. 2 x 18 W at 230 V).

Operating SL-series VS ballasts (100–127 V) depends on the use of a 220–240 V starter as these operating devices are high-reactance transformers that supply higher voltages to the lamp. Starters should only be used with starter contacts with a hardness value of at least HB 100.

## Assembly Instructions for Electromagnetic Ballasts

### For mounting and installing of electromagnetic ballasts for fluorescent lamps

#### Mandatory regulations

DIN VDE 0100	Erection of low voltage installations
EN 60598-1	Luminaires – part 1: general requirements and tests
EN 61347-1	Operating devices for lamps – part 1: general and safety requirements
EN 61347-2-8	Operating devices for lamps – part 2-8: special requirements for ballasts for fluorescent lamps
EN 60921	Ballasts for fluorescent tube lamps – performance requirements
EN 50294	Methods for measuring the total input power of ballast-lamp circuits
EN 55015	Maximum values and methods of measurement for RFI suppression in electrical lighting installations and similar electrical appliances
EN 61000-3-2	Electromagnetic Compatibility (EMC) – part 3: maximum values – main section part 2: maximum values for mains harmonics (device input current up to and including 16 A per conductor)
EN 61547	Installations for general lighting purposes – EMC immunity requirements

#### Technical specifications

Operating voltage range	VS ballasts can be operated at the specified mains voltage within a tolerance range of $\pm 10\%$
Leak current	$\leq 0.1$ mA per ballast
Error current	Impulse-resistant leak-current protection must be installed. Distribute the luminaires to phases L1, L2 and L3; install tri-phase FI switches. If permissible, install FI switches with 30 mA leak current; connect no more than 15 luminaires as FI switches can be triggered at half the leak current value.
Power factor	Inductive ballasts: $\lambda \leq 0.5$ Parallel-compensated ballasts: $\lambda \geq 0.85$

Compensation VS recommends the use of parallel capacitors owing to their technical advantages and power balance.

Possible interference with IR systems  
Are not known to occur

## Mechanical mounting

Mounting position  
Any

Mounting location  
Ballasts are designed for installation in luminaires or comparable devices.  
Independent ballasts do not need to be installed in a casing.

Fastening Preferably using screws  $\varnothing$  4 mm

Maximum temperatures  
The stipulated winding temperature (tw 130, tw 140 and tw 150, respectively) must not be exceeded during normal operation. The corresponding maximum values (232°C, 248°C and 264°C, respectively) must be observed during anomalous operation. These values must be checked by measuring resistance during operation.

Temperature increase  
The lamp current flowing through the ballast generates a power loss that leads to an increase in winding temperature. The  $\Delta t$  values for normal and abnormal operation provide a measure of this temperature increase. The  $\Delta t$  values are ascertained using standardised connections for measurement and are provided on the ballast type plate in Kelvin.

Example:  $\Delta t = 55 \text{ K} / 140 \text{ K}$ :

The first  $\Delta t$  value indicates the temperature increase for normal operation at the lamp's operating current. The second value, 140 K in this case, denotes the temperature increase of the winding that results from the current that flows when the lamp's discharge path is short-circuited. The current that flows in this state is the preheat current through the lamp's electrodes.

## Electromagnetic compatibility (EMC)

Interference Interference voltage measurements have to be taken at the connection terminals for luminaires with magnetic ballasts as these are systems that operate with lamp voltages of under 100 Hz. These low-frequency interference voltages are generally not critical with magnetic ballasts.

Interference immunity  
Thanks to the robust design and choice of materials, magnetic ballasts provide a high degree of interference immunity and are not impaired by admissible mains power interference.

Mains Harmonics After every zero crossing of the lamp current, fluorescent lamps experience a re-ignition peak as the lamps go out for a brief (imperceptible) moment. These re-ignition peaks generate mains harmonics that are smoothed by the ballast's impedance. The right design, i.e. determining the operating point of the magnetic ballast, ensures mains harmonics are limited to the maximum values permitted by EN 61000-3-2. VS electromagnetic ballasts all comply with the stipulated maximum values.

1

2

3

4

5

6

7

8

9

10

## Selection of automatic cut-outs for VS electromagnetic ballasts

### Dimensioning automatic cut-outs

When a ballast is switched on, high transient current peaks occur due to parasite capacitances that can accumulate with the number of luminaires. These high system switch-on currents put a strain on the automatic conductor cut-outs. For this reason, only surge-current-proof automatic cut-outs should be used for lighting systems.

**Release reaction** The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B and C characteristics.

**No. of ballasts** The following values are meant as guidelines only and may vary depending on the respective lighting system. The maximum number of VS ballasts applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible ballasts must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m of [2.5 m<sup>2</sup>] conductor from the power supply to the distributor and a further 15 m to the luminaire). Doubling circuit impedance to 800 mΩ increases the possible number of ballasts by 10%. The values quoted in the following tables are guidelines and can be affected by system-specific factors.

Possible number of ballasts connected to automatic cut-outs for compact fluorescent lamps (single lamp operation)

Lamp output W	10 A (B)		16 A (B)	
	Inductive	Parallel compensation	Inductive	Parallel compensation
5/7/8/9/10/11/13	50	90	80	130
18 (TC-L)	27	32	43	51
18 (TC-D)	40	65	65	110
24	25	32	40	51
26	27	32	43	51
36	23	32	37	51

Possible number of ballasts connected to automatic cut-outs for tubular and U-shaped fluorescent lamps (single lamp operation)

Lamp output W	10 A (B)		16 A (B)	
	Inductive	Parallel compensation	Inductive	Parallel compensation
4/6/8/10	50	90	80	130
13	45	80	70	115
15/18/20	27	32	43	51
30/36/38/40	23	32	37	51
58/65	15	20	22	32
70	13	18	20	30

## Reliability and service life

Provided the specified maximum values for the winding temperature are complied with, a service life of 10 years can be expected. Failure rate:  $\leq 0.025\%/1,000$  hours.

## Electrical installation


Connection terminals (combination terminals)

- Use copper (not stranded) wire
- Required diameter for push-in connection 0.5 - 1 mm<sup>2</sup>
- Stripped lead length 8 mm
- Required cross-section for IDC zone 0.5 mm<sup>2</sup>; max.  $\varnothing$  2 mm including insulation, no wire stripping required; mounting requires a special tool


Push-in terminals The integrated terminals can only be used with rigid leads.  
Rigid leads: 0.5–1.5 mm<sup>2</sup>. The stripped lead length totals 8 mm.

Wiring The wiring between the mains, ballasts and lamps must comply with the respective circuit diagram.


## Circuit diagrams for the operation of fluorescent lamps with Vossloh-Schwabe electromagnetic ballasts




Inductive single circuit




Parallel-compensated single circuit




Inductive tandem circuit



Parallel-compensated tandem circuit



Parallel-compensated single circuit with high-reactance transformer



Parallel-compensated tandem circuit with high-reactance transformer

1

2

3

4

5

6

7

8

9

10

## Connection terminals

In the interest of ensuring firm contacts and long component service life, Vossloh-Schwabe uses only top-quality materials for plastic or metal parts during the production of connection terminals. These quality features apply to both Vossloh-Schwabe's luminaire connection terminals as well as to the terminals fitted to ballasts and lampholders.

## Notes on connection terminals on electronic ballasts

Vossloh-Schwabe electronic ballasts are fitted with installation-friendly push-in connectors. In addition, many models for linear fluorescent lamps are also available with IDC terminals (for solid conductors 0.5 mm<sup>2</sup>) and supplementary push-in terminals (for solid conductors 0.5–1 mm<sup>2</sup>), stripped length 8–9 mm. IDC terminals permit automated luminaire wiring and testing using the ALF system and are thus particularly efficient.

## Notes on connection terminals on electromagnetic ballasts

Standard issue Vossloh-Schwabe electromagnetic ballasts are fitted with installation-friendly IDC/push-in terminals (combination terminals) or push-in terminals. The terminals are designed for use with solid conductors with cross-sections of 0.5–1 mm<sup>2</sup> (combination terminals) or up to 1.5 mm<sup>2</sup> (push-in terminals) and are approved for current loads of up to 6 A (combination terminal) and 16 A (push-in terminal). The lead stripping length totals 7–9 mm for push-in terminals; leads do not need to be stripped for IDC terminals.

On request, many ballasts can also be provided with screw terminals (current load up to 16 A) for conductor cross-sections of 0.5 to 2.5 mm<sup>2</sup>.

## Notes on connection terminals on lampholders

Vossloh-Schwabe usually equips lampholders for T and TC lamps as well as starter lampholders with installation-friendly push-in terminals for solid conductors of 0.5–1 mm<sup>2</sup>. Most lampholders are fitted with twin push-in terminals and thus permit through-wiring. The required lead stripping length amounts to 8–9 mm for all types.


## IDC terminals

In order to fully exploit the vast potential for rationalisation offered by automated wiring and testing with the ALF system, a totally new component family was developed that is equipped with the VDE-tested IDC terminal technology. This technology has already been used very successfully on a large scale in other branches of industry. This connection technology dispenses with the stripping of conductors that is required for the push-in, screw or crimping methods. The tried-and-tested IDC terminal technology has created the foundation for efficient automation as it ensures both high connection quality and rapid contacting. Components equipped in this fashion make it possible to through-wire several terminals with a single conductor. This constitutes a further economic advantage as it significantly reduces the required conductor lengths. Furthermore, this design principle makes it possible to use adapters to simply and reliably make electrical contact from above for a VDE-compatible final luminaire inspection.


## ALF connection

Height: 12 mm


Release by twisting and pulling the conductor at the same time




1. Insert release tool above the conductor
2. Pull out the conductor



Stripping the conductor for push-in terminal 0.5–1 mm<sup>2</sup>: 8–9 mm



## IDC/ Push-in terminal for electromagnetic ballasts



Stripping the conductor for push-in terminal 0.5–1 mm<sup>2</sup>: 7–9 mm



## Lampholders for Fluorescent Lamps

### Lampholders for compact fluorescent lamps

Vossloh-Schwabe produces the majority of lampholders for TC lamps using PBT, a thermoplastic material. This highly heat-resistant material is responsible for the T140 temperature rating. Leading lamp manufacturers also use PBT for the lamp bases they produce. This material harmonisation in conjunction with fatigue-free, stainless steel lamp mounting springs ensures a permanently secure lamp fit.

### Lampholders for double-ended fluorescent lamps

VS lampholders for T lamps are characterised by a number of technical features that guarantee a high degree of reliability and safety. The heat-resistant PBT rotor with which most VS lampholders are fitted is a recognised trademark. In addition to the lampholders with the field-tested large rotor, VS also provides a new generation of lampholders featuring innovative "Rotoclic" rotor technology. This new VS technology constitutes a further milestone in the development of highly heat-resistant rotor systems.

Among the special features of this new technology is a T140 temperature rating thanks to a front plate made entirely of PBT as well as a clearly audible click when the lamp is inserted or replaced. As a result, the motion of turning the lamp from "replacement" to "operating" position is aided acoustically.

In addition to this, VS produces a further series of lampholders with a rotor-like function, whose front plates are also made of highly heat-resistant PBT and have similarly been given a T140 temperature rating.

The maximum permissible temperature at the back of all lampholders is  $T_m$  110 °C. Another key feature common to all VS lampholders is a highly effective support for the lamp pin that reliably prevents any base pin deflection, even with older lamps, and guarantees a durable and firm contact.

### Push-through lampholders

Push-through lampholders are inserted from below through a cut-out in the luminaire casing and are secured by lateral catches. This type of lampholder is frequently used in luminaires on which the lampholder remains visible from the outside, e.g. in so-called strip lighting. The electrical leads are laid beneath the sheet metal level. Luminaire directive EN 60598-1 Para. 8.2 must be observed with regard to the luminaire.

### Push-fit lampholders

This lampholder type, which is frequently found in surface-mounted ceiling and built-in luminaires, is pushed into the luminaire casing from above. The lampholder foot should protrude by no more than 4 mm to match the usual height of the spacing cams in the luminaire casing. These lampholders are mostly wired above the luminaire casing to the side of the lampholder. However, there are also lampholders on which the wiring runs through the lampholder foot, with the leads laid beneath the luminaire casing.







### Built-in lampholders

This design is also predominantly used for recessed ceiling and surface-mounted luminaires. However, unlike push-fit lampholders, built-in lampholders are usually fitted at the ends of the luminaire boxes. In addition to the usual fixing with split pins attached to the rear, there are also countless versions with fixing clips, push-fit studs or screw-in holes, which are also available with spring-loaded length compensation. Built-in lampholders offer luminaire designers a wealth of scope regarding the choice of lamp position in relation to the reflector. This enables great variation in light distribution as the lampholder does not dictate the distance of the centre of the lamp from the metal casing.

### Surface-mounted lampholders












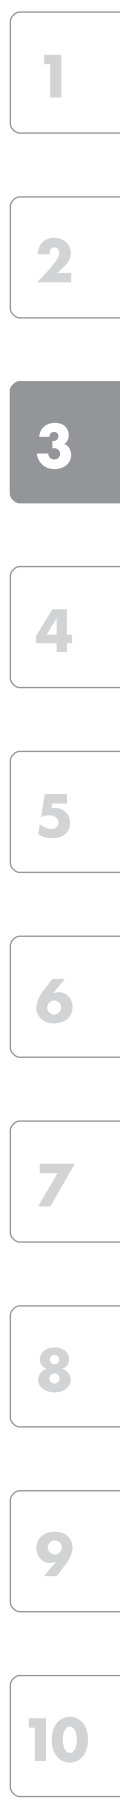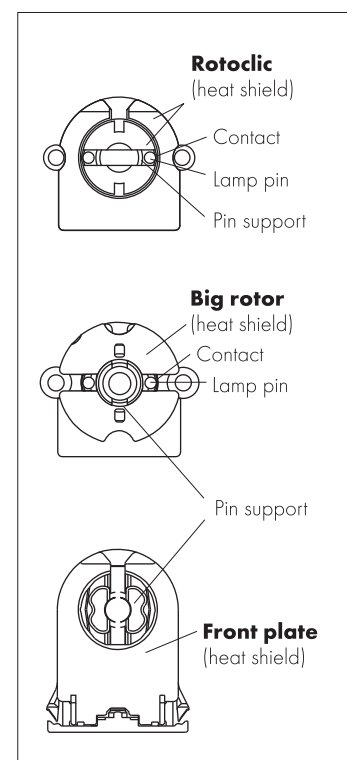

























The fastening system of surface-mounted lampholders usually consists of screws or rivets above a fixing level, along which the wiring is also laid. As this type of installation is usually too costly nowadays for large unit numbers, these lampholders are used almost exclusively for special applications, e.g. displays or illuminated advertisements.

**VS lampholders for the UL market and UL approved leads are available for all common lamp types. Further information can be found at [www.unvlt.com](http://www.unvlt.com).**










## Lamp Table – Fluorescent Lamps


Lamp type/lamp base	Base	Output (W)	Max. length (C) acc. to IEC			
TC-DEL  G24q-1  -2  -3 	G24q-1	10 13	95 130			
	G24q-2	18	140			
	G24q-3	26	160			
TC-TEL  GX24q-1  -2  -3  -4  -5  -6 	GX24q-1	13	90			
	GX24q-2	18	110			
	GX24q-3	26 32	130 145			
	GX24q-4	42	155			
	GX24q-5	57	191			
	GX24q-6	70	219			
TC-D  G24d-1  -2  -3 	G24d-1	8 10 13	73* 95 130			
	G24d-2	18	140			
	G24d-3	26	160			
TC-T  GX24d-1  -2  -3 	GX24d-1	13	90			
	GX24d-2	18	110			
	GX24d-3	26	130			
TC-S  G23 	G23	5 7 9 11	85 115 145 215			
TC-SEL  2G7 	2G7	5 7 9 11	85 115 145 215			
TC-TEL  2G8-1 	2G8-1	60 85 120	167 208 285			
TC-TEL  GR14q-1 	GR14q-1	14 17	A 99.7 121.7	B 120 142	C 126.6 148.6	D 41* 41*
TC-DD  GR8  GR10q  GRY10q-3  GRZ10d  GRZ10i 	GR8	16 28	A 138 205	B 141 207		
	GR10q	10 16 21 28 38	92 138 138 205 205	95 141 141 207 207		
	GRY10q-3	55	205	205*		
	GRZ10d	18	137	141*		
	GRZ10i	30	202	206*		
TC-F  2G10 	2G10	18 24 36	122 165 217			
TC-L  2G11 	2G11	18 24 34 36 40 55 80	225 320 533* 415 535 535 565			

\*not included in IEC standard (non-committal specifications)




## Lamp Table – Fluorescent Lamps

Lamp type/lamp base	Base	Output (W)	Ø D (mm)	Length A/C (mm) acc. to IEC 60081/ 60901 (for circular lamps B)
 GX53-1	GX53-1	7 9		
 T2 (T7) W4.3	W4.3x8.5d	6 8 11 13	7 7 7 7	219.3 320.9 422.5 524.1
 T5 (T16) G5	G5	4 6 8 13 14 20 21 24 25 28 32 34 35 39 45 49 50 54 73 80	16 16	135.9 212.1 288.3 516.9 549.0 549.0 849.0 549.0 1149.0 1149.0 1449.0 849.0 1449.0 849.0 1449.0 1449.0 1449.0 1149.0 1449.0 1449.0
 T8 (T26) G13	G13	10 14 15 16 16 18 20* <sup>1</sup> 23 30 32 33 34 36 36 38 50 51 58 70	26 26	470.0* <sup>2</sup> 360.0* <sup>2</sup> 437.4 589.8 720.0* <sup>2</sup> 589.8 438.0* <sup>2</sup> 970.0* <sup>2</sup> 894.6 1199.4 1149.0 1047.0* <sup>2</sup> 1199.4 970.0* <sup>2</sup> 1047.0 1500.0 1500.0 1500.0 1763.8
 T12 (T38) G13	G13	20 25 30 40 65 75 80* <sup>1</sup> 85 85* <sup>1</sup> 100 100* <sup>1</sup> 115 125 140 140* <sup>1</sup> 160* <sup>1</sup>	38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38	589.8 970.0 894.6 1199.4 1500.0 1763.8 1500.0 2374.3 1763.8 2374.3 1800.0* <sup>2</sup> 1200.0* <sup>2</sup> 2374.3 1500.0* <sup>2</sup> 1800.0* <sup>2</sup> 1800.0* <sup>2</sup>

\*<sup>1</sup> UV solarium lamps  
\*<sup>2</sup> Not included in IEC standard  
(non-committal specifications)




## Lamp Table – Fluorescent Lamps

Lamp type/lamp base	Base	Output (W)	Ø D (mm)	A (mm)
 <p>TR5 (TR16) 2GX13</p>	2GX13	22 40 55 60	16 16 16 16	230.0 305.0 305.0 379.0
 <p>TR G10q</p>	G10q	22 32 40 60	29 29 29 30	215.9 304.8 406.4 408.8*
 <p>2G13 TU</p>	2G13-92	18 36 58	26 26 26	304* 566, 601* 566, 759*

\* Not yet included in IEC standard  
(non-committal specifications)

### Tube lengths of plastic and glass protective tube

Ø D (mm)	Length L (mm)
38±0.5	L = A - 20±1
50±0.8	L = A - 30±1



### Key to lamp designations

<b>TC-S</b>	Tube Compact-Single
<b>TC-SEL</b>	Tube Compact-Single Electronic
<b>TC-D</b>	Tube Compact-Double
<b>TC-DEL</b>	Tube Compact-Double Electronic
<b>TC-T</b>	Tube Compact-Triple
<b>TC-TEL</b>	Tube Compact-Triple Electronic
<b>TC-Q</b>	Tube Compact-Quad
<b>TC-QEL</b>	Tube Compact-Quad Electronic
<b>TC-DD</b>	Tube Compact-Double D-Shape
<b>TC-L</b>	Tube Compact-Long
<b>TC-F</b>	Tube Compact-Flat
<b>T2 (T7)</b>	Tube Ø 2/8" (7 mm)
<b>T5 (T16)</b>	Tube Ø 5/8" (16 mm)
<b>T8 (T26)</b>	Tube Ø 8/8" (26 mm)
<b>T12 (T38)</b>	Tube Ø 12/8" (38 mm)
<b>T-U</b>	Tube, U-Shape
<b>T-R</b>	Tube, Ring-Shape
<b>T-R5 (T-R16)</b>	Tube, Ring-Shape Ø 5/8" (16 mm)

## Energy efficiency classification

The commission's regulation (EC) No. 245/2009 dated 18 March 2009 implementing Directive 2005/32/EC of the European Parliament and of the Council with regard to defining ecodesign requirements for fluorescent lamps without integrated ballast, high-pressure discharge lamps and for ballasts and luminaires needed for their operation, and repealing Directive 2000/55/EC of the European Parliament and of the Council (official title), has created a legal framework in the EU that defines fundamental requirements for operating efficient lighting technology products.

Although the Regulation predominantly applies to general lighting, it is also product-orientated and thus independent of any specific application. The efficiency and performance requirements (specifications governing performance features) apply to fluorescent lamps without integrated ballast, high-pressure discharge lamps as well as ballasts and luminaires needed to operate these lamps. A brief overview of the requirements governing fluorescent lamps is provided in the following table (excerpt from the CELMA guide).

Stage	Requirements governing	
<b>1</b> 13.04.2010	<b>Ballasts</b>	<ul style="list-style-type: none"> <li>• Non-dimmable ballasts: minimum EEI = B2</li> <li>• Dimmable ballasts: minimum EEI = A1</li> <li>• Standby losses ≤ 1 W</li> <li>• Non-dimmable ballasts for new lamps not designed for use with existing ballasts: minimum EEI = A3</li> <li>• Ballasts must be labelled (for instance: EEI = A2)</li> </ul>
<b>Interim stage</b> 13.09.2010	<b>Luminaires</b>	<ul style="list-style-type: none"> <li>• Luminaire standby losses = sum of ballast limiting values (No. of installed ballasts)</li> <li>• After 18 months: technical information must be made available, both online and in luminaire documentation (for luminaires &gt; 2,000 Lumens).</li> </ul>
<b>2</b> 13.04.2012	<b>Ballasts</b>	<ul style="list-style-type: none"> <li>• Standby losses ≤ 0.5 W</li> </ul>
	<b>Luminaires</b>	<ul style="list-style-type: none"> <li>• Luminaire standby losses = sum of ballast limiting values (No. of installed ballasts)</li> <li>• Luminaire designs must permit integration of 3rd-stage ballasts. Exceptions: luminaires &gt; IP4X</li> </ul>
at the latest by <b>13.04.2014</b>	<b>Revision of the regulation</b> Technological progress as well as the sum of the experience gained during the implementation of the Regulation will be taken into consideration during the revision process.	
<b>3</b> 13.04.2017	<b>Ballasts</b>	<ul style="list-style-type: none"> <li>• New ballast limiting values calculated using specified formula (see page 378)</li> <li>• That constitutes a ban on EEI = A3, B1 and B2 ballasts (magnetic ballasts can only be produced for higher lamp ratings – permitted classes are A2, A2 BAT and only A1 BAT for dimmable ballasts)</li> <li>• Ballasts labels shortened to A2, A2 BAT or A1 BAT ("EEI =" will be dropped; this means labelled ballasts can be clearly dated.</li> </ul>
	<b>Luminaires</b>	<ul style="list-style-type: none"> <li>• All luminaire designs must permit the integration of 3rd-stage ballasts.</li> </ul>

1

2

3

4

5

6

7

8

9

10

# Technical Details – Components for Fluorescent Lamps

## Energy efficiency classification


The following table taken from Regulation 245/2009/EC provides an overview of (1st- and 2nd-stage) ballast requirements, ordered according to efficiency values:

Lamp data					Ballast efficiency ( $P_{\text{lamp}}/P_{\text{input}}$ ) (non-dimmable ballasts)				
Type	Nominal output W	ILCOS-Code	Typical rating		A2 BAT %	A2 %	A3 %	B1 %	B2 %
			50 Hz W	HF W					
T8	15	FD-15-E-G13-26/450	15	13.5	87.8	84.4	75.0	67.9	62.0
	18	FD-18-E-G13-26/600	18	16	87.7	84.2	76.2	71.3	65.8
	30	FD-30-E-G13-26/900	30	24	82.1	77.4	72.7	79.2	75.0
	36	FD-36-E-G13-26/1200	36	32	91.4	88.9	84.2	83.4	79.5
	38	FD-38-E-G13-26/1050	38.5	32	87.7	84.2	80.0	84.1	80.4
	58	FD-58-E-G13-26/1500	58	50	93.0	90.9	84.7	86.1	82.2
	70	FD-70-E-G13-26/1800	69.5	60	90.9	88.2	83.3	86.3	83.1
TC-L	18	FSD-18-E-2G11	18	16	87.7	84.2	76.2	71.3	65.8
	24	FSD-24-E-2G11	24	22	90.7	88.0	81.5	76.0	71.3
	36	FSD-36-E-2G11	36	32	91.4	88.9	84.2	83.4	79.5
TC-F	18	FSS-18-E-2G10	18	16	87.7	84.2	76.2	71.3	65.8
	24	FSS-24-E-2G10	24	22	90.7	88.0	81.5	76.0	71.3
	36	FSS-36-E-2G10	36	32	91.4	88.9	84.2	83.4	79.5
TC-D/ TC-DE	10	FSQ-10-E-G24q=1 FSQ-10-I-G24d=1	10	9.5	89.4	86.4	73.1	67.9	59.4
	13	FSQ-13-E-G24q=1 FSQ-13-I-G24d=1	13	12.5	91.7	89.3	78.1	72.6	65.0
	18	FSQ-18-E-G24q=2 FSQ-18-I-G24d=2	18	16.5	89.8	86.8	78.6	71.3	65.8
	26	FSQ-26-E-G24q=3 FSQ-26-I-G24d=3	26	24	91.4	88.9	82.8	77.2	72.6
TC-T/ TC-TE	13	FSM-13-E-GX24q=1 FSM-13-I-GX24d=1	13	12.5	91.7	89.3	78.1	72.6	65.0
	18	FSM-18-E-GX24q=2 FSM-18-I-GX24d=2	18	16.5	89.8	86.8	78.6	71.3	65.8
	26	FSM-26-E-GX24q=3 FSM-26-I-GX24d=3	26.5	24	91.4	88.9	82.8	77.5	73.0
TC-DD/ TC-DDE	10	FSS-10-E-GR10q FSS-10-L/P/H-GR10q	10.5	9.5	86.4	82.6	70.4	68.8	60.5
	16	FSS-16-E-GR10q FSS-16-I-GR10q FSS-10-L/P/H-GR10q	16	15	87.0	83.3	75.0	72.4	66.1
	21	FSS-21-E-GR10q FSS-21-I-GR10q FSS-21-L/P/H-GR10q	21	19	89.4	86.4	79.2	73.9	68.8
	28	FSS-28-E-GR10q FSS-28-I-GR10q FSS-28-L/P/L-GR10q	28	26	89.7	86.7	81.3	78.2	73.9
	38	FSS-38-E-GR10q FSS-38-L/P/L-GR10q	38.5	36	92.3	90.0	85.7	84.1	80.4
TC	5	FSD-5-I-G23 FSD-5-E-2G7	5.4	5	72.7	66.7	58.8	49.3	41.4
	7	FSD-7-I-G23 FSD-7-E-2G7	7.1	6.5	77.6	72.2	65.0	55.7	47.8
	9	FSD-9-I-G23 FSD-9-E-2G7	8.7	8	78.0	72.7	66.7	60.3	52.6
	11	FSD-11-I-G23 FSD-11-E-2G7	11.8	11	83.0	78.6	73.3	66.7	59.6
T5	4	FD-4-E-G5-16/150	4.5	3.6	64.9	58.1	50.0	45.0	37.2
	6	FD-6-E-G5-16/225	6	5.4	71.3	65.1	58.1	51.8	43.8
	8	FD-8-E-G5-16/300	7.1	7.5	69.9	63.6	58.6	48.9	42.7
	13	FD-13-E-G5-16/525	13	12.8	84.2	80.0	75.3	72.6	65.0
T9-C	22	FSC-22-E-G10q-29/200	22	19	89.4	86.4	79.2	74.6	69.7
	32	FSC-32-E-G10q-29/300	32	30	88.9	85.7	81.1	80.0	76.0
	40	FSC-40-E-G10q-29/400	40	32	89.5	86.5	82.1	82.6	79.2

## Lamp types



T8




TC-L




TC-F




TC-D/TC-DE



TC-T/TC-TE



TC-DD/TC-DDE



TC



T5

# Technical Details – Components for Fluorescent Lamps

Lamp data					Ballast efficiency ( $P_{Lamp}/P_{Input}$ )				
Type	Nominal output W	ILCOS-Code	Typical rating		(non-dimmable ballasts)				
			50 Hz W	HF W	A2 BAT %	A3 %	B1 %	B2 %	
T2	6	FDH-6-L/P-W4.3x8.5d-7/220		5	72.7	66.7	58.8	–	–
	8	FDH-8-L/P-W4.3x8.5d-7/320		7.8	76.5	70.9	65.0	–	–
	11	FDH-11-L/P-W4.3x8.5d-7/420		10.8	81.8	77.1	72.0	–	–
	13	FDH-13-L/P-W4.3x8.5d-7/520		13.3	84.7	80.6	76.0	–	–
	21	FDH-21-L/P-W4.3x8.5d-7		21	88.9	85.7	79.2	–	–
	23	FDH-23-L/P-W4.3x8.5d-7		23	89.8	86.8	80.7	–	–
T5-E	14	FDH-14-L/P-G5-16/550		13.7	84.7	80.6	72.1	–	–
	21	FDH-21-L/P-G5-16/850		20.7	89.3	86.3	79.6	–	–
	24	FDH-24-L/P-G5-16/550		22.5	89.6	86.5	80.4	–	–
	28	FDH-28-L/P-G5-16/1150		27.8	89.8	86.9	81.8	–	–
	35	FDH-35-L/P-G5-16/1450		34.7	91.5	89.0	82.6	–	–
	39	FDH-39-L/P-G5-16/850		38	91.0	88.4	82.6	–	–
	49	FDH-49-L/P-G5-16/1450		49.3	91.6	89.2	84.6	–	–
	54	FDH-54-L/P-G5-16/1150		53.8	92.0	89.7	85.4	–	–
	80	FDH-80-L/P-G5-16/1150		80	93.0	90.9	87.0	–	–
	95	FDH-95-L/P-G5-16/1150		95	92.7	90.5	84.1	–	–
	120	FDH-120-L/P-G5-16/1450		120	92.5	90.2	84.5	–	–
T5-C	22	FSCH-22-L/P-2GX13-16/225		22.3	88.1	84.8	78.8	–	–
	40	FSCH-40-L/P-2GX13-16/300		39.9	91.4	88.9	83.3	–	–
	55	FSCH-55-L/P-2GX13-16/300		55	92.4	90.2	84.6	–	–
	60	FSCH-60-L/P-2GX13-16/375		60	93.0	90.9	85.7	–	–
TC-IE	40	FSDH-40-L/P-2G11		40	91.4	88.9	83.3	–	–
	55	FSDH-55-L/P-2G11		55	92.4	90.2	84.6	–	–
	80	FSDH-80-L/P-2G11		80	93.0	90.9	87.0	–	–
TC-TE	32	FSMH-32-L/P-GX24q=3		32	91.4	88.9	82.1	–	–
	42	FSMH-42-L/P-GX24q=4		43	93.5	91.5	86.0	–	–
	57	FSM6H-57-L/P-GX24q=5 FSM8H-57-L/P-GX24q=5		56	91.4	88.9	83.6	–	–
	70	FSM6H-70-L/P-GX24q=6 FSM8H-70-L/P-GX24q=6		70	93.0	90.9	85.4	–	–
	60	FSM6H-60-L/P-2G8=1		63	92.3	90.0	84.0	–	–
	62	FSM8H-62-L/P-2G8=2		62	92.2	89.9	83.8	–	–
	82	FSM8H-82-L/P-2G8=2		82	92.4	90.1	83.7	–	–
	85	FSM6H-85-L/P-2G8=1		87	92.8	90.6	84.5	–	–
120	FSM6H-120-L/P-2G8=1 FSM8H-120-L/P-2G8=1		122	92.6	90.4	84.7	–	–	
TC-DD	55	FSSH-55-L/P-GR10q		55	92.4	90.2	84.6	–	–

At the very latest, the following energy efficiency formula for ballasts will be introduced to coincide with the 3rd stage:

$$\begin{aligned} \text{If } P_{Lamp} \leq 5 \text{ W} & \quad E_{bFL} = 0.71 \\ \text{If } 5 \text{ W} < P_{Lamp} < 100 \text{ W} & \quad E_{bFL} = P_{Lamp} / (2 * \sqrt{P_{Lamp}/36} + 38/36 * P_{Lamp} + 1) \\ \text{If } P_{Lamp} \geq 100 \text{ W} & \quad E_{bFL} = 0.91 \end{aligned}$$

The following limiting values must be observed:

$\eta_{Ballast}$	Energy efficiency classes
$\geq E_{bFL}$	A2 and A1 BAT
$\geq 1 - 0.75 * (1 - E_{bFL})$	A2 BAT

The graph illustrates the difference between Classes A2, A1 BAT and A2 BAT (BAT = best available technology).

### Lamp types

**T9-C**

**T2**


**T5-E**

**T5-C**

**TC-IE**

**TC-TE**

**TC-DD**

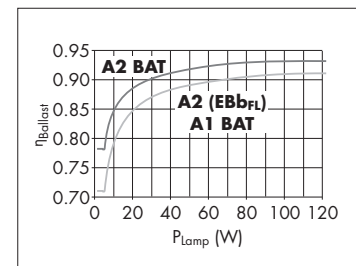

# SYSTEM- OPTIMISING COMPENSATION



## PARALLEL CAPACITORS

Capacitors are designed to compensate inductive reactive current of discharge lamps in 50/60 Hz networks when operated with electromagnetic ballasts. As required by utility companies, capacitors serve to compensate the reactive current generated by the respective ballast. A power factor of  $\lambda \geq 0.9$  is achieved.

In addition, capacitors can also be used to compensate or generate phase displacements. Careful selection of the raw materials as well as special thermal treatment of the capacitor coil guarantee a long service-life and stable capacitance.



# 4

## Parallel Capacitors

### Parallel capacitors

274–277

### Technical details for parallel capacitors

278–287

General technical details

394–401

Glossary

402–404

1

2

3

4

5

6

7

8

9

10



## Parallel Connected Capacitors with Break-action Mechanism

### Capacitors type B

Casing: aluminium

Filling material: based on vegetable oil

Fastening: male nipple with nut and washer included


Discharge resistance

Overpressure protection


On request further capacities or connectors



**A** Push-in twin terminals 0.5–1 mm<sup>2</sup>



**B** Double spade connector 6.3x0.8 acc. to IEC 61210

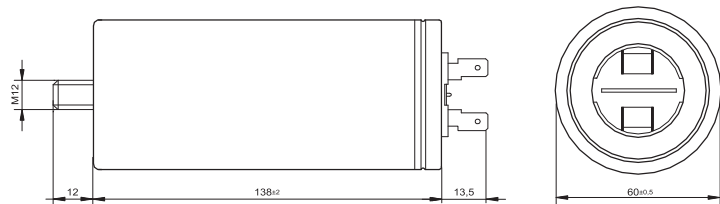

## Parallel Connected Capacitors with Break-action Mechanism

### Capacitors type B

Ref. No.	Capacity µF	Temperature range °C	Drawing	Ø (D) mm	Length (L) mm	Male nipple/ length (mm)	Weight g	Unit pcs.
<b>250 V, 50/60 Hz</b>								
536378	2.0	-40 to 100	A	25	63	M8x10	85	100
536379	4.0	-40 to 100	A	25	63	M8x10	85	100
536380	6.0	-40 to 100	A	25	63	M8x10	85	100
536381	8.0	-40 to 100	A	25	78	M8x10	90	100
536382	10.0	-40 to 100	A	30	78	M8x10	95	100
536383	12.0	-40 to 100	A	30	78	M8x10	95	100
536384	13.0	-40 to 100	A	30	78	M8x10	95	100
536385	16.0	-40 to 100	A	35	78	M8x10	100	81
536386	18.0	-40 to 100	A	35	78	M8x10	100	81
536387	20.0	-40 to 100	A	35	78	M8x10	100	81
536388	25.0	-40 to 100	A	40	78	M8x10	110	64
536389	30.0	-40 to 100	A	35	103	M8x10	115	81
536390	32.0	-40 to 100	A	35	103	M8x10	115	81
536391	35.0	-40 to 100	A	40	103	M8x10	130	64
536392	40.0	-40 to 100	A	40	103	M8x10	130	64
536393	45.0	-40 to 100	A	40	103	M8x10	130	64
536394	50.0	-40 to 100	A	45	103	M8x10	160	49
536395	55.0	-40 to 100	A	45	103	M8x10	160	49
536396	60.0	-40 to 100	A	45	103	M8x10	200	49
<b>380-450 V, 50/60 Hz</b>								
536397	13.0	-40 to 85	A	35	103	M8x10	115	81
536398	18.0	-40 to 85	A	40	103	M8x10	130	64
536399	28.0	-40 to 85	A	45	103	M8x10	130	49
536400	32.0	-40 to 85	A	45	103	M8x10	130	49
536401	37.0	-40 to 85	A	50	103	M12x12	220	36
536402	50.0	-40 to 85	A	55	103	M12x12	240	36
536403	55.0	-40 to 85	B	50	128	M12x12	250	36
536404	60.0	-40 to 85	B	55	128	M12x12	250	36
536405	85.0	-40 to 85	B	60	138	M12x12	300	36

1

2

3

4

5

6

7

8

9

10

## Parallel Connected Capacitors 250 V, 50/60 Hz

### Capacitors type A

Casing: plastics, white or aluminium

Fastening: male nipple


with nut and washer included

Discharge resistance

Optional: thermal cut-out,

European wide patent

On request with alternative capacities, connection terminals, mounting options, casing materials or with a thermal fuse as well as versions with IDC terminal for the automatic luminaire wiring




Ref. No.	Capacity µF	Temperature range °C	Ø (D) mm	Length (L) mm	Male nipple/ length (mm)	Push-in twin terminals	Weight g	Unit pcs.
<b>Plastic casing</b>								
500296	2.0	-40 to 85	25	57	M8x10	0.5-1 mm <sup>2</sup>	22	530
500299	2.5	-40 to 85	25	57	M8x10	0.5-1 mm <sup>2</sup>	22	530
500300	3.0	-40 to 85	25	57	M8x10	0.5-1 mm <sup>2</sup>	22	530
500301	3.5	-40 to 85	25	57	M8x10	0.5-1 mm <sup>2</sup>	22	530
500302	4.0	-40 to 85	25	70	M8x10	0.5-1 mm <sup>2</sup>	29	450
500303	4.5	-40 to 85	25	70	M8x10	0.5-1 mm <sup>2</sup>	29	450
500304	5.0	-40 to 85	25	70	M8x10	0.5-1 mm <sup>2</sup>	29	450
500305	6.0	-40 to 85	25	70	M8x10	0.5-1 mm <sup>2</sup>	29	450
506495	7.0	-40 to 85	30	70	M8x10	0.5-1 mm <sup>2</sup>	35	320
502783	8.0	-40 to 85	30	70	M8x10	0.5-1 mm <sup>2</sup>	35	320
504351	9.0	-40 to 85	30	70	M8x10	0.5-1 mm <sup>2</sup>	35	320
508667	10.0	-40 to 85	30	70	M8x10	0.5-1 mm <sup>2</sup>	39	320
506366	12.0	-40 to 85	30	94	M8x10	0.5-1 mm <sup>2</sup>	43	260
508468	15.0	-40 to 85	30	94	M8x10	0.5-1 mm <sup>2</sup>	43	260
508668	16.0	-40 to 85	30	94	M8x10	0.5-1 mm <sup>2</sup>	48	260
500315	18.0	-40 to 85	35	94	M8x10	0.5-1.5 mm <sup>2</sup>	55	190
500316	20.0	-40 to 85	35	94	M8x10	0.5-1.5 mm <sup>2</sup>	62	190
500317	25.0	-40 to 85	40	94	M8x10	0.5-1.5 mm <sup>2</sup>	66	80
500318	30.0	-40 to 85	40	94	M8x10	0.5-1.5 mm <sup>2</sup>	72	100
<b>Aluminium casing</b>								
500319	32.0	-40 to 85	35	135	M8x10	0.5-1.5 mm <sup>2</sup>	70	50
500320	35.0	-40 to 85	40	135	M8x10	0.5-1.5 mm <sup>2</sup>	135	36
500321	40.0	-40 to 85	40	135	M8x10	0.5-1.5 mm <sup>2</sup>	139	36
536406	45.0	-40 to 85	40	135	M8x10	0.5-1.5 mm <sup>2</sup>	139	36
500322	50.0	-40 to 85	45	135	M8x10	0.5-1.5 mm <sup>2</sup>	154	32
500323	55.0	-40 to 85	45	135	M8x10	0.5-1.5 mm <sup>2</sup>	159	32

# Parallel Connected Capacitors with Leads

## 250 V, 50/60 Hz

### Capacitors type A

Casing: plastics, white  
 Fastening: male nipple with nut and washer included  
 Discharge resistance  
 Fixing centres: 20 mm  
 Optional: thermal cut-out, European wide patent  
 On request with alternative capacities, connection terminals, mounting options, casing materials or with a thermal fuse as well as versions with IDC terminal for the automatic luminaire wiring

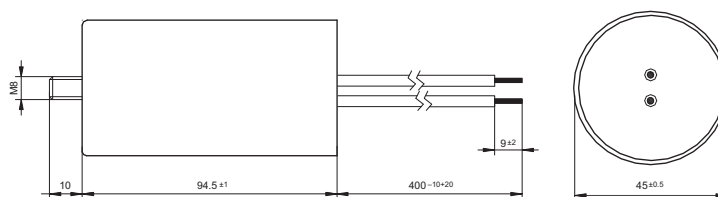

Ref. No.	Capacity μF	Temperature range °C	Ø (D) mm	Length (L) mm	Male nipple/ length (mm)	Lead length mm	Weight g	Unit pcs.
<b>Plastic casing</b>								
552774	2.0	-25 to 85	25	57	M8x10	150	22	400
526169	4.0	-25 to 85	28	54	M8x10	250	32	350
526170	6.0	-40 to 85	25	70	M8x10	250	32	320
526171	8.0	-40 to 85	35	57	M8x10	250	35	220
529665	10.0	-40 to 85	30	70	M8x10	200	40	280
536742	12.0	-25 to 85	36	67	M8x10	150	47	120
529666	16.0	-25 to 85	36	92	M8x10	200	52	120
536741	20.0	-40 to 85	35	95	M8x10	150	63	160
508484	25.0	-25 to 85	40	70	M8x10	250	72	80
536743	30.0	-25 to 85	40	92	M8x10	150	82	80
528554	35.0	-25 to 85	45	94.5	M8x10	250	85	60
536813	40.0	-25 to 85	45	94.5	M8x10	400	85	60
528555	45.0	-25 to 85	50	94.5	M8x10	250	90	50

**4**

Capacitors for Fluorescent and Discharge Lamps

<b>Idle current compensation</b>	<b>279</b>
<b>Parallel compensation</b>	<b>280</b>
<b>MPP capacitor technology</b>	<b>280–282</b>
<b>Assembly instructions – Capacitors</b>	<b>283–284</b>
<b>Capacitor tables</b>	<b>285–289</b>
<b>General technical details</b>	<b>394–401</b>
Glossary	402–404

## Compensation of idle current

When using magnetic ballasts a phase shift occurs between the mains voltage and the current drawn. This phase shift is expressed by the power factor  $\lambda$ , which generally ranges between a value of 0.3 and 0.7 with inductive circuits.

As a result of this phase shift, idle current, which does not boost the efficiency of the lighting unit, is also taken up from the power supply network in addition to real power. Power utility companies therefore require an increase of the power factor to values of over 0.85 for systems exceeding a certain rating (usually upwards of 250 W per external conductor).

Compensation capacitors are used to counteract idle current (by increasing the power factor) and can be connected either in parallel or in series.

Thanks to a power factor of approx. 0.95, electronic ballasts do not need to be operated with compensation capacitors.

## Compensation using series capacitors


Series compensation employs a so-called dual circuit (two fluorescent lamp circuits connected in parallel), whereby the capacitor, which is connected in a branch of the circuit, over compensates the inductive idle current to such an extent that it covers the idle current of both ballasts. This type of circuit is only used with fluorescent lamps. As series capacitors are dimensioned for nominal-voltage and ballast tolerances, the lamp in the capacitor branch of the dual circuit operates with a higher current and thus also with a higher rating. Apart from differences in lamp brightness, the power loss in the circuit branch with the capacitor will also be greater.

An advantage of the dual circuit is that it prevents the radiated light from flickering.

The higher current in the so-called capacitive lamp circuit causes an up to 14% increase in lamp rating and a reduction of the lamp service life by as much as 20%. This goes hand in hand with substantial technical, ecological and economic disadvantages.

Series capacitors have to meet very high technical requirements to suit various aspects like temperature, nominal voltage, tolerances of the capacitance values, etc.

As defined by EC directive 2000/55/EC (European Standard EN 50294 governing the measurement of total power consumption), a series capacitor is considered to be a part of the ballast. If the system rating of the capacitive circuit containing the lamps and ballasts is then determined in line with the above definition, rating increases of up to 14% will become apparent in comparison to operation without a series capacitor. Experience has shown that this increased power consumption often means devices fall in the directive's "banned" category. It is therefore strongly advised that due consideration be given to the elevated power consumption values common to using series capacitors for compensation purposes.



1

2

3

4

5

6

7

8

9

10

## Parallel compensation

During parallel compensation, each lamp circuit is assigned to a capacitor connected in parallel to the mains. Only one capacitor providing sufficient capacitance is needed for luminaires with several lamps. Parallel compensation does not affect current flow through a discharge lamp. The requirements placed on parallel capacitors are clearly lower than those for series capacitors.

However, parallel compensation can be subject to limitations when using audio-frequency ripple control pulses if the system operates with a connected rating of over 5 kVA and ripple control frequencies of over 300 Hz are used. The respective power utility company should be consulted for advice in such cases.

Parallel compensation is used in fluorescent lamp and high-pressure discharge lamp circuits.

As parallel compensation offers substantial advantages, this has become the accepted method in the last few years.


## Metallised polypropylene film capacitors

Metallised polypropylene film capacitors are designed to compensate the inductive idle current drawn by discharge lamps (fluorescent lamps, high-pressure mercury vapour lamps, high-pressure sodium vapour lamps and metal halide lamps with a ceramic discharge tube) in 50 Hz/60 Hz grids. All Vossloh-Schwabe compensation capacitors for luminaires feature a metallised polypropylene film dielectric. Compensation capacitors help to increase the power factor to values of over  $\lambda$  0.85 as required by power utility companies.

## Construction of metallised polypropylene film capacitors

VS MPP capacitors contain a low-loss metallised polypropylene film dielectric, which is produced by depositing a thin layer of zinc and aluminium or pure aluminium vapour onto one side of the polypropylene film. The contacts at either end of the capacitor coil are created by spraying on a layer of metal and thus guarantee a high current-carrying capacity as well as a low-inductive connection between the terminals and the coils.

All capacitors with a nominal voltage upwards of 280 V are filled with oil or resin after the coils have been inserted and then hermetically sealed. This protects the coils from environmental influences and reduces partial discharge, which contributes to a long service life and stable capacitance. The effects of partial discharge only play a minor role for capacitors with a nominal voltage of under 280 V so that these devices do not need to be filled.

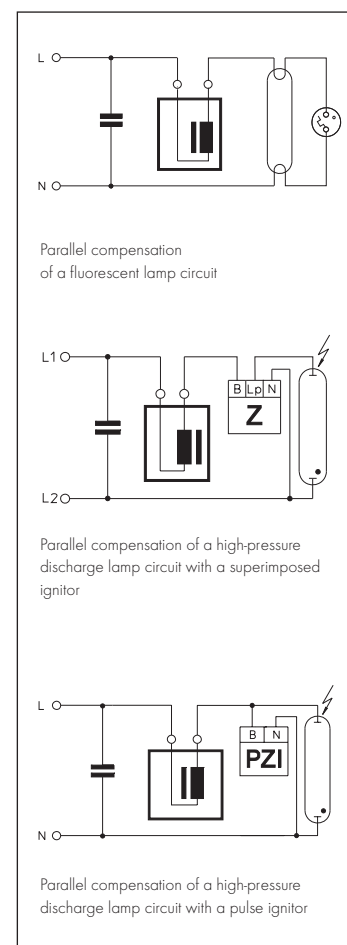

Hermetically sealed, filled capacitors with an overpressure contact breaker should always be used in critical ambient conditions (high humidity, aggressive atmospheres, high temperatures), if the workload and power supply conditions are unknown as well as in situations that demand increased attention to safety.

VS MPP capacitors feature a self-healing dielectric. In the event of a dielectric breakdown in the coil (short circuit), the metal coating vaporises around the breakdown site owing to the high temperature of the transient arc that is produced. Owing to the excess pressure generated during such a breakdown, the metal vapour is pushed outwards away from the centre of the site within the space of just a few microseconds. This creates a coating-free corona around the breakdown site that completely isolates it and means the capacitor remains fully functional during a dielectric breakdown.

The self-healing properties of a capacitor can decrease with time and with constant overloading. This bears the risk of a non-healing breakdown with a permanent short circuit. Therefore self-healing must not be confused with failsafe.

Compensation capacitors are divided into two type families (A and B) in accordance with IEC 61048 A2.

- Type A capacitors defined:  
"Self-healing parallel capacitors; without an (overpressure) contact breaker in the event of failure".  
They are referred to as unsecured capacitors.
- Type B capacitors defined:  
"Self-healing capacitors for series connection in lighting circuits or self-healing parallel capacitors; with an (overpressure) contact breaker in the event of failure".  
These are referred to as hermetically sealed, secured capacitors.

In accordance with the standard, the discharge resistor of both capacitor families must be capable of reducing capacitor voltage to a value of under 50 V in the space of 60 seconds after disconnection from the mains.

## **Capacitors without a contact breaker, unsecured, Type A capacitors in accordance with IEC 61048 A2**

IEC 61048 A2-compliant Type A capacitors are self-healing and require no short-circuit protection for normal operation.

Type A capacitors are not fitted with a specific failsafe mechanism as prescribed by the standards for Type B capacitors. Nevertheless, the requirements laid down in the standard for Type A capacitors, especially with regard to temperature and service life tests, are designed to ensure a sufficient degree of device safety and availability **provided the device was correctly installed and operated under calculable and known ambient operating conditions.**

Even so, in very rare cases these capacitors can still develop erratic behaviour due to overloading or at the end of the device's service life.

For that reason, Type A capacitors should only be integrated into luminaires for operation in ambient conditions that are uncritical with regard to flammable materials. Luminaires should feature protection against secondary damage inside and outside the luminaire in the event of a defect.

1

2

3

4

5

6

7

8

9

10




Temperature-protected capacitors are a further development of Type A capacitors and are fitted with a thermal fuse that is triggered by overheating as a result of electrical or thermal overloading. They are tested in accordance with IEC 61048 A2 and comply with Type A requirements. Excess temperatures cause the two wire ends of the element inside the fuse to melt into bead shapes that are fully isolated from each other by special insulation.

In 99% of all the rare cases of critical capacitor failure, this failure is preceded by a gradual increase in the loss factor, which leads to an increase in the winding temperature and thus triggers the thermal fuse.

Vossloh-Schwabe recommends that preference be given to Type A capacitors with a thermal fuse as a matter of course for reasons of safety.

Type A capacitors predominantly feature a plastic casing.

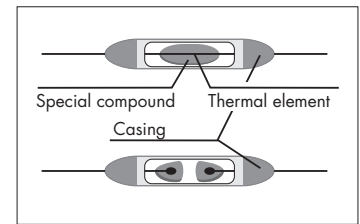


### Capacitors with a contact breaker, secured Type B capacitors in accordance with IEC 61048 A2

Self-healing capacitors do not require short-circuit protection for normal operation as they automatically regenerate after a dielectric breakdown. However, as a result of frequent self-healing caused by overloading (voltage, current, temperature) or towards the end of the capacitor's service life, overpressure can build up inside the capacitor (due to the decomposition products of the vaporised polypropylene).

In order to prevent the capacitor casing from exploding in such cases, hermetically sealed capacitors in accordance with IEC 61048 A2 (Type B capacitors) are fitted with an overpressure contact breaker. If excess pressure builds up within these capacitors, e.g. due to undue thermal loading or excessive voltages or at the end of the capacitor's service life, a concertina section opens out that causes the casing to expand lengthways. As a result, the wire contacts rupture at a predetermined breaking point, which irreversibly interrupts the current (contact breaker).

This type of overpressure-protected capacitor with a contact breaker is also referred to as a flame- and explosion-proof capacitor with a break-action mechanism.

Type B capacitors with a contact breaker are available in an aluminium casing.

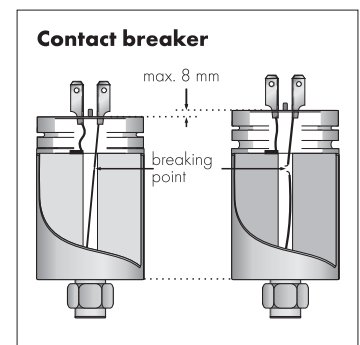

## Assembly Instructions for Capacitors

### For mounting and installing compensation capacitors

#### Mandatory regulations

DIN VDE 0100	Erection of low voltage installations
EN 60598	Luminaires – part 1: General requirements and tests
EN 55015	Maximum values and testing methods for radio disturbance of electrical lighting facilities and similar electrical equipment
EN 61000-3-2	Electromagnetic Compatibility (EMC) – part 3: maximum values – main section part 2: maximum values for mains harmonics (ballast input current up to and including 16 A per conductor)
EN 61048	Operating devices for lamps – capacitors for fluorescent lamp circuits and other discharge lamp circuits; general and safety requirements
EN 61049	Operating devices for lamps – capacitors for fluorescent lamp circuits and other discharge lamp circuits; performance requirements

#### Mechanical mounting

Fastening	<p>Base screw (permissible torque):</p> <ul style="list-style-type: none"> <li>• M8x10 – 5 Nm (aluminium casing)</li> <li>• M8x10 – 2.2 Nm (plastic casing)</li> </ul>
Mounting location	<p>Any</p> <p>Capacitors fitted with overpressure protection require clearance of at least 10 mm above the contacts so ensure the casing can expand unhindered if the contact breaker is triggered.</p>
Heat transfer	<p>Capacitors should be mounted with the greatest possible clearance to heat sources or lamps. During operation, the temperature measured at the <math>t_c</math> point must not exceed the specified maximum value.</p>
$t_c$ point	<p>The <math>t_c</math> point is defined as an arbitrary point on the surface of the capacitor, which is not specifically marked.</p>
UV Radiation	<p>Capacitors should not be installed in an unprotected manner directly next to any sources of light, heat radiation or convection (ballasts, lamps, heating elements, etc.) as both high temperatures and constant exposure to UV radiation can lead to premature ageing. In combination with high temperatures, UV radiation or other substances and influencing factors, chemicals such as ozone and chlorine can lead to accelerated ageing and material embrittlement.</p>
Thermal load	<p>All capacitor casings are made of flame-retardant materials. However, the potting material, oils and the winding material are flammable and consideration must be taken of this fact during installation. The thermal load of an MKP capacitor is approx. 40 MJ/kg.</p>

1

2

3

4

5

6

7

8

9

10

## Safety functions

Type A capacitors are not fitted with any special protective functions in case of defect.

Temperature-protected capacitors are a further development of Type A capacitors and feature a thermal fuse that is triggered by excess temperatures and disconnects the capacitor from the mains.

Type B capacitors are fitted with an overpressure contact breaker in case of defects at the end of the capacitor's service life.

### Connection

Parallel capacitors for fluorescent lamps:

- Casing diameter 25–30 mm: push-in terminals for 0.5–1 mm<sup>2</sup> conductors and IDC terminals for H05V-U 0.5 conductors
- Casing diameter > 30 mm: push-in terminals for 0.5–1 mm<sup>2</sup> conductors

Parallel capacitors for high-pressure lamps:

- Casing diameter 25–30 mm: push-in terminals for 0.5–1 mm<sup>2</sup> conductors and IDC terminals for H05V-U 0.5 conductors
- Casing diameter > 30 mm: push-in terminals for 0.5–1.5 mm<sup>2</sup> conductors

## Reliability and service life

Provided the max. specified voltage and current loads, temperature, humidity and mains harmonics values are observed,

- approx. 50,000 hours for overpressure-protected parallel capacitors
- approx. 30,000 hours for parallel capacitors without overpressure protection in a plastic or aluminium casing

A 3–10% decrease in capacitance must be expected in the course of the capacitor's service life.

Failure rate: 1‰ per 1,000 operating hours when maximum voltage, current and temperature values are not exceeded.

## Electrical installation

Nominal voltage 250 V, 50/60 Hz; 280 V, 50/60 Hz; 450 V, 50/60 Hz  
(dependent on type)

Capacitance tolerance

±10% (±5% dependent on type)

Temperature range

–25/–40 °C to +85/+100 °C (dependent on type, details see product page)

Optional thermal fuse

Relative humidity Class F for Type B capacitors: 75% annual mean, 95% peak value on 30 days  
Class G for Type A capacitors: 65% annual mean, 85% peak value on 30 days

Condensation Impermissible

## Capacitors for fluorescent lamp circuits

Lamp Output W	Type	Parallel compensation capacitor ( $\mu\text{F} \pm 10\%$ at 250 V)		Series compensation capacitor ( $\mu\text{F} \pm 4\%$ )		
		220-240 V/50 Hz $\mu\text{F}$	220-230 V/60 Hz $\mu\text{F}$	220 V/50 Hz $\mu\text{F}$	230 V/50 Hz $\mu\text{F}$	220 V/60 Hz $\mu\text{F}$
4	T	2**	2**	–	–	–
6	T	2**	2**	–	–	–
8	T	2**	2**	–	–	–
10	T	2	2	–	–	–
13	T	2	2	–	–	–
14	T	4.5	4.5	–	–	–
15	T	3.5 or 4*	3 or 4*	–	–	–
16	T	2	2	–	–	–
18	T	4.5 or 4*	4**	2.9/440 V	2.8/480 V	2.4/440 V
20	T	4.5 or 4*	4**	2.9/440 V	2.8/480 V	2.4/440 V
23	T	3.5	3	–	–	–
25	T	3.5	3	–	2.3/450 V	–
30	T	4.5	4	3/420 V	2.9/450 V	–
36	T	4.5	4	3.6/420 V	3.4/450 V	3/420 V
36-1m	T	6.5	–	–	–	–
38	T	4.5	4	–	–	–
40	T	4.5	4	3.6/420 V	3.4/450 V	3/420 V
42	T	6.5	–	–	–	–
58	T	7	6	5.7/450 V	5.3/450 V	4.8/420 V
65	T	7	6	5.7/450 V	5.3/450 V	4.8/420 V
70	T	6	–	–	–	–
75	T	6	–	–	–	–
80	T	9	8	–	7.2/420 V	–
85	T	8	6.5	–	8.4/420 V	–
100	T	10	9	–	–	–
115	T	18	16	–	–	–
140	T	14	14	–	–	–
160	T	14	14	–	–	–
16	T-U	2	2	–	–	–
18/20	T-U	4.5 or 4*	4**	2.9/440 V	2.8/480 V	2.4/440 V
36/40	T-U	4.5	4	3.6/420 V	3.4/450 V	3/420 V
58/65	T-U	7	6	–	–	–
22	T-R	5	4.5	–	3.2/440 V	–
32	T-R	5	4.5	–	3.4/450 V	–
40	T-R	4.5	4	3.6/420 V	3.4/450 V	3/420 V
5/7/9/11	TC-S	2**	2**	–	–	–
10	TC-D/TC-T	2	2	–	–	–
13	TC-D/TC-T	2	2	–	–	–
18	TC-D/TC-T	2	2	–	–	–
26	TC-D/TC-T	3.5	3	–	–	–
10	TC-DD	2	2	–	–	–
16	TC-DD	2	2	–	–	–
21	TC-DD	3	3	–	–	–
28	TC-DD	3.5	3	–	–	–
38	TC-DD	4.5	4	–	–	–
18	TC-L/TC-F	4.5 or 4*	4**	–	–	–
24	TC-L/TC-F	4.5	4	–	–	–
34	TC-L/TC-F	4.5	4	–	–	–
36	TC-L/TC-F	4.5	4	–	–	–

\*) Two lamps connected to a ballast in series

\*\*) Applies to one lamp connected to a ballast or two lamps connected in series

1

2

3

4

5

6

7

8

9

10

## Capacitors for

Lamp		Compensation capacitor ( $\mu\text{F} \pm 10\%$ )			
Output W	Type	220/230/240/252 V 50 Hz ( $\mu\text{F}$ )	220 V 60 Hz ( $\mu\text{F}$ )	380/400/420 V, 50 Hz ( $\mu\text{F}$ )	380 V/60 Hz 60 Hz ( $\mu\text{F}$ )

### high-pressure mercury vapour lamp circuits

50	HM	7	6		
80	HM	8	7		
125	HM	10	10		
250	HM	18	15		
400	HM	25	25		
700	HM	40	35		
1000	HM	60	50		

### high-pressure sodium vapour lamp circuits

35	HS	6	5		
50	HS	8	8		
70	HS	12	10		
100	HS	12	10		
150	HS	20	16		
250	HS	32	25		
400	HS	45	40		
600	HS	65	55	25	20
750	HS	70	60	25	25
1000	HS	100	85		

### metal halide lamp circuits

35	HI	6	5		
70	HI	12	10		
100	HI	12	10		
150	HI	20	16		
250	HI	32	25		
400	HI	35/45	35/45		
1000	HI	85	75		
2000	HI	125	125		
2000	HI			37	37
2000	HI			60	60
2000	HI			60	60
2000	HI			100	100

## Capacitors for low-pressure discharge lamp circuits

Lamp		Compensation capacitor ( $\mu\text{F} \pm 10\%$ )
Output W	Type	230 V/50 Hz $\mu\text{F}$
35	LS	20
55	LS	20
90	LS	26
135	LS	40
180	LS	40

1

2

3

4

5

6


7

8

9

10

## ELECTRONIC AND ELECTRO- MAGNETIC TRANSFORMERS

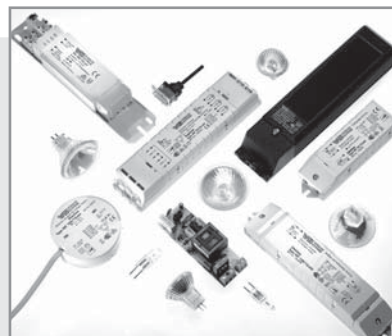

### FOR LOW-VOLTAGE HALOGEN INCANDESCENT LAMPS

The operating voltage of low-voltage halogen lamps is normally 12 V (6 and 24 V are also used for special applications). As a result, transformers are required in order to connect such lamps to the normal mains supply within buildings, whereby international requirements governing building installations specify that safety transformers or converters (electronic transformers) be exclusively used for such purposes nowadays. These devices are designed in such a way as to prevent both personal injury and the outbreak of fire should the lighting system malfunction.

#### **Electronic converters**

The following chapter provides an overview of the VS range of electronic converters that feature a whole range of advantages: light and compact, superior efficiency (approx. 95%), short-circuit protection, integrated overheating and overload protection, soft start for longer lamp life, broad part-load range and dimmability.

#### **Electromagnetic safety transformers**

The following chapter also provides an overview of Vossloh-Schwabe's range of electromagnetic transformers. The range is split into protection class II transformers and protection class I built-in transformers whose ultra-flat design make them particularly user-friendly. Lamp brightness can be regulated using conventional phase dimmers for low-voltage halogen lamps.



# 5

## Transformers for Low-voltage Halogen Incandescent Lamps

<b>Independent electronic converters</b>	<b>290–293</b>
<b>Electronic built-in converters</b>	<b>294</b>
<b>Potentiometer and dimmers</b>	<b>295</b>
<b>Electromagnetic safety transformers</b>	<b>296–298</b>
<b>Technical details for incandescent lamps</b>	<b>360–373</b>
General technical details	394–401
Glossary	402–404

1

2

3

4

5

6

7

8



9

10



## Independent Electronic Converters – LiteLine



Electronic safety converters for low-voltage halogen incandescent lamps 12 V  
 Casing: heat-resistant polyamide  
 Mains frequency: 50–60 Hz  
 Protection against "no load" operation  
 Protection against short-circuit:  
 electronic switch-off with automatic restart  
 Electronically controlled overload and temperature protection  
 Suitable for installation in furniture and on combustible surfaces  
 Power factor: > 0.95  
 Efficiency: ≥ 94%  
 Dimming: optional with phase-cutting leading-edge or phase-cutting trailing-edge dimmer  
 Screw terminals: 2.5 mm<sup>2</sup>  
 (EST 60/12.635 primary: 4 mm<sup>2</sup>)  
 Quantity of screw terminals:  
 1x2-poles primary  
 1x2-poles secondary  
 With integrated cord grip  
**Protection class II**  
 SELV-equivalent  
 Degree of protection: IP20  
 RFI-suppressed

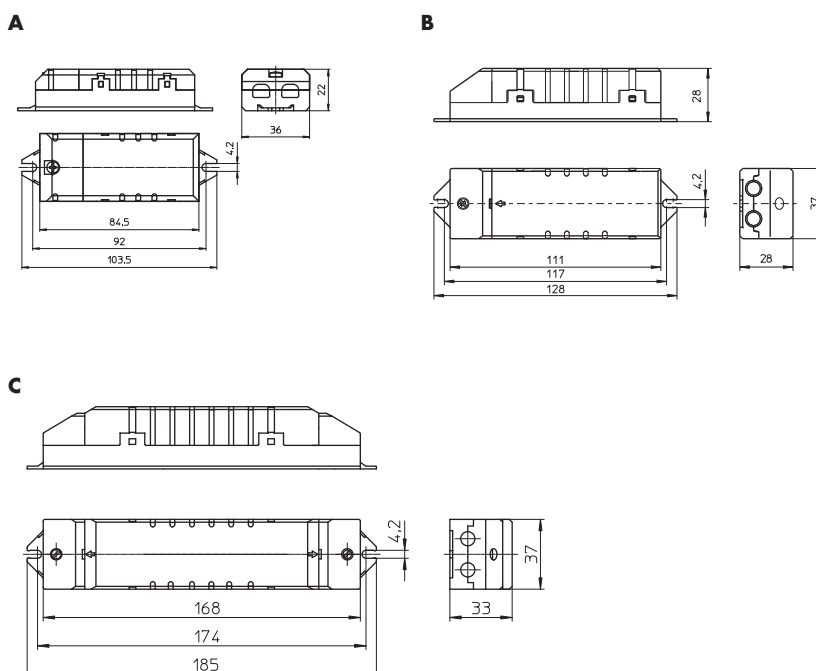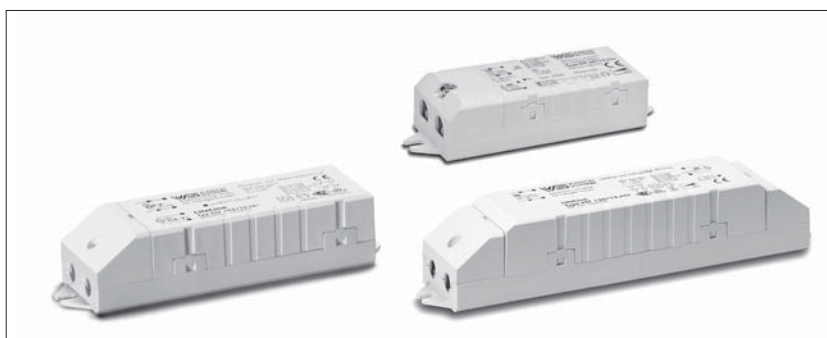

Type	Ref. No.	Capacity range (W)	Voltage (V) prim. (±10%)	sec.	Nominal current A	Ambient temperature $t_a$ (°C)	Casing temperature $t_c$ (°C)	Drawing	Weight g
<b>Dimensions: 22x36x103.5 mm</b>									
EST 60/12.635	<b>186173</b>	10-60	220-240	10.2-12	0.258-0.260	-20 to 45	max. 85	A	70
<b>Dimensions: 28x37x128 mm</b>									
EST 70/12.380	<b>186072</b>	20-70	230-240	11.3-11.7	0.30-0.31	-20 to 45	max. 70	B	85
EST 105/12.381	<b>186077</b>	20-105	230-240	11.2-11.7	0.435-0.445	-20 to 40	max. 85	B	95
<b>Dimensions: 33x37x185 mm</b>									
EST 150/12.622	<b>186098</b>	50-150	230-240	11.2-11.6	0.595-0.605	-20 to 45	max. 85	C	175

## Independent, Super-thin Electronic Converters – FlatLine

Electronic safety converters  
for low-voltage halogen incandescent lamps 12 V  
Casing: heat-resistant polyamide  
Mains frequency: 50–60 Hz  
Protection against "no load" operation  
Protection against short-circuit:  
electronic switch-off with automatic restart  
Electronically controlled overload  
and temperature protection  
Suitable for installation in furniture  
and on combustible surfaces  
Power factor: 0.98  
Efficiency: 95%  
Dimming: with phase-cutting trailing-edge dimmer  
Screw terminals: 2.5 mm<sup>2</sup>  
Quantity of screw terminals:  
1x 2-poles primary  
1x 2-poles secondary  
With integrated cord grip  
**Protection class II**  
SELV  
Degree of protection: IP20  
RFI-suppressed

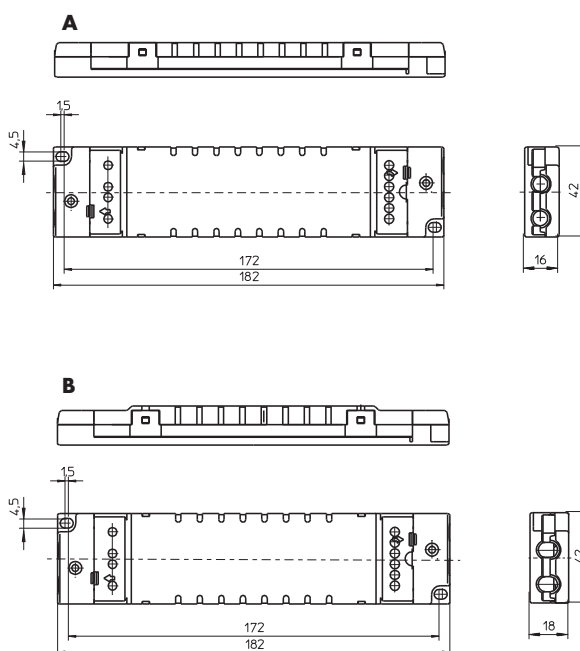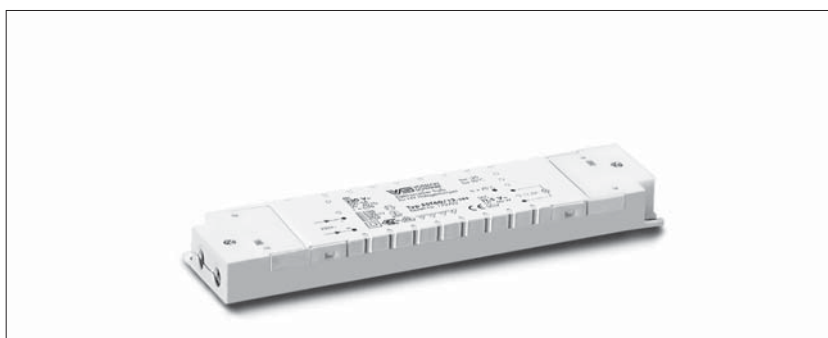

Type	Ref. No.	Capacity range W	Voltage (V)		Nominal current (A)	Ambient temperature $t_a$ (°C)	Casing temperature $t_c$ (°C)	Drawing	Weight g
			prim. (±10%)	sec.					
<b>Dimensions: 16x42x182 mm</b>									
EST 60/12.388	<b>179792</b>	10–60	230	11.5	0.25	–20 to 50	max. 70	A	100
<b>Dimensions: 18x42x182 mm</b>									
EST 120/12.389	<b>179793</b>	20–120	230	11.5	0.50	–20 to 40	max. 70	B	125

1

2

3

4

5

6

7

8

9

10

## Independent Electronic Converters – TopLine

Electronic safety converters for low-voltage halogen incandescent lamps 12 V

Casing: heat-resistant polyamide

Mains frequency: 50-60 Hz

Protection against "no load" operation

Protection against short-circuit:

electronic switch-off with automatic restart

Electronically controlled overload

and temperature protection

Suitable for installation in furniture

and on combustible surfaces

Power factor:  $\geq 0.98$

Efficiency:  $\geq 94\%$

Dimming: optional with phase-cutting leading-edge or phase-cutting trailing-edge dimmer

Screw terminals: 2.5 mm<sup>2</sup>

(EST 200/12.649: 4 mm<sup>2</sup>)

Quantity of screw terminals:

2x2-poles primary

3x2-poles secondary

With integrated cord grip


### Protection class II

SELV-equivalent

Degree of protection: IP20

RFI-suppressed

### Time saving mounting due to click-in endcaps

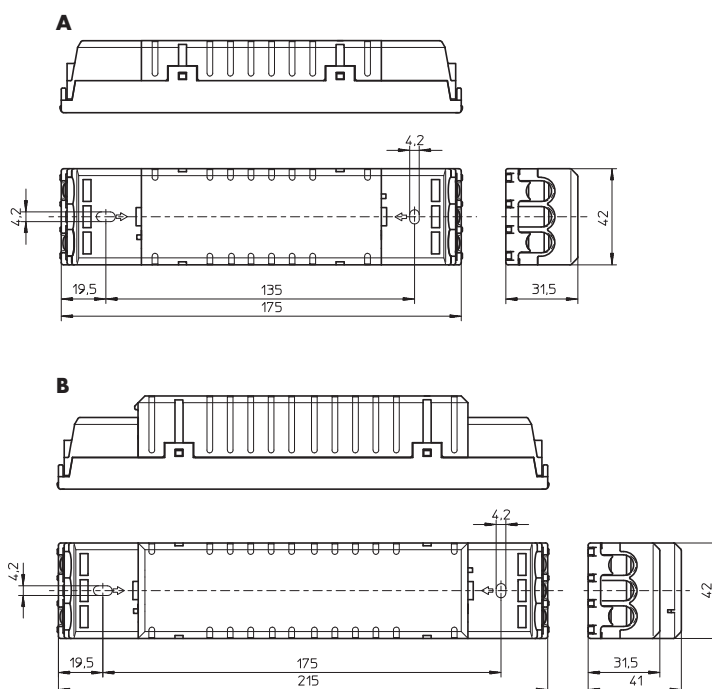

Type	Ref. No.	Capacity range (W)	Voltage (V) prim. ( $\pm 10\%$ )	sec.	Nominal current A	Ambient temperature $t_a$ ( $^{\circ}\text{C}$ )	Casing temperature $t_c$ ( $^{\circ}\text{C}$ )	Drawing	Weight g
<b>Dimensions: 31.5x42x175 mm</b>									
EST 70/12.643	<b>186117</b>	20-70	230-240	11.3-11.8	0.305-0.310	-20 to 55	max. 75	A	145
EST 105/12.644	<b>186118</b>	20-105	230-240	11.3-11.8	0.430-0.440	-20 to 55	max. 75	A	165
<b>Dimensions: 41x42x215 mm</b>									
EST 150/12.645	<b>186119</b>	50-150	230-240	11.3-11.9	0.615-0.630	-20 to 55	max. 75	B	230
EST 200/12.649	<b>186068</b>	35-200	230/240	11.3/11.7	0.81/0.86	-20 to 45	max. 70	B	280

## Independent Electronic Converters – DisLine

Electronic safety converters for low-voltage halogen incandescent lamps 12 V

Casing: heat-resistant polycarbonate

Mains frequency: 50–60 Hz

Protection against "no load" operation

Protection against short-circuit:

electronic switch-off with automatic restart

Thermal cut-out with automatic reset

Suitable for installation in furniture

and on combustible surfaces

Power factor: 0.98

Efficiency: 95%

Dimming: with phase-cutting trailing-edge dimmer

Primary lead: 2x0.75 mm<sup>2</sup>,

PVC-insulation, length: 100<sup>+30</sup> mm

Secondary lead: 0.75 mm<sup>2</sup>,

PVC-insulation, length: 150 mm



Secondary lead length: max. 2 m

### Protection class II

SELV

Degree of protection: IP20

RFI-suppressed



1

2

3

4

5

6

7

8

9

10

Type	Ref. No.	Capacity range W	Voltage (V)		Nominal current A	Ambient temperature $t_a$ (°C)	Casing temperature $t_c$ (°C)	Drawing	Weight g
			prim. ( $\pm 10\%$ )	sec.					
<b>Dimensions: <math>\varnothing 53 \times 22.2</math> mm</b>									
EST 70/12.601	<b>186005</b>	20–70	230	11.5	0.30	–20 to 35	max. 75	A	70
<b>Dimensions: <math>\varnothing 70 \times 22.2</math> mm</b>									
EST 105/12.602	<b>186007</b>	35–105	230	11.5	0.43	–20 to 35	max. 70	B	100

## Electronic Built-in Converters – CapLine

Electronic built-in safety converters for low-voltage halogen incandescent lamps 12 V

Casing: heat-resistant polyamide, encapsulated with polyester resin

For installation in plaster depth boxes:

Ø 60 mm, height 65 mm

Dimensions: 30x50.5x61.5 mm

Mains frequency: 50–60 Hz

Protection against "no load" operation

Primary and secondary leads:

stranded conductors 1 mm<sup>2</sup>, Si-insulation,

Ø external: 2 mm, length: 170 mm

Protection against short-circuit:

electronic switch-off with automatic restart

Thermal cut-out with automatic reset

Suitable for installation in furniture

and on combustible surfaces

Power factor: 0.98



Efficiency: 94%

Dimming: with phase-cutting trailing-edge dimmer

SELV

Degree of protection: IP54

RFI-suppressed

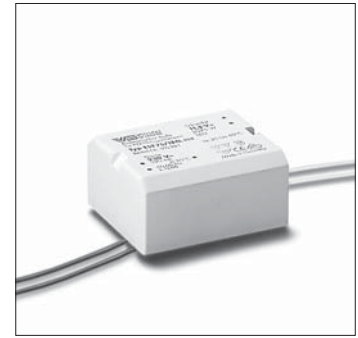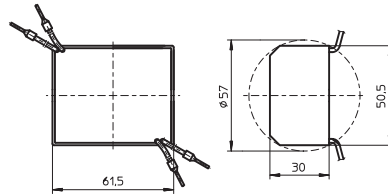

Type	Ref. No.	Capacity range (W)	Voltage (V)		Nominal current (A)	Ambient temperature $t_a$ °C	Casing temperature $t_c$ °C	Weight g
			prim. (±10%)	sec.				
EST 75/12G.302	<b>162400</b>	20-75	230	11.5	0.32	-20 to 60	max. 85	200

## Dimmers for Electronic Converters

### Phase-cutting trailing-edge dimmer

Dimmer without cover plate

Dimensions: 67x67x51 mm



Push-button change-over switch with stud 4 mm,  
for installation in flush-type boxes with  $\varnothing$  55 mm

Output: 10–350 W

Weight: 60 g

Unit: 25 pcs.

**Ref. No.: 172773**



### Phase-cutting leading-edge dimmer

Dimmer without cover plate

Dimensions: 67x67x51 mm

Push-button change-over switch with stud 4 mm,  
for installation in flush-type boxes with  $\varnothing$  55 mm

Output: 15–500 W

Weight: 60 g

Unit: 25 pcs.

**Ref. No.: 172774**

### Cover plate with rotary knob

Dimensions: 80x80x9 mm

Colour: white

Weight: 30 g

Unit: 10 pcs.

**Ref. No.: 172775**

1

2

3

4

5

6

7

8


9

10


## Super-thin Electromagnetic Built-in Transformers 20–105 VA

Shape: 28 x 41 mm


Electromagnetic safety transformers  
for low-voltage halogen incandescent lamps 12 V  
Vacuum-impregnated with polyester resin  
Screw terminals: 0.5–2.5 mm<sup>2</sup>  
Protection class I  
For these transformers without thermal cut-out,  
a slow-acting fuse should be installed in the  
wiring on site

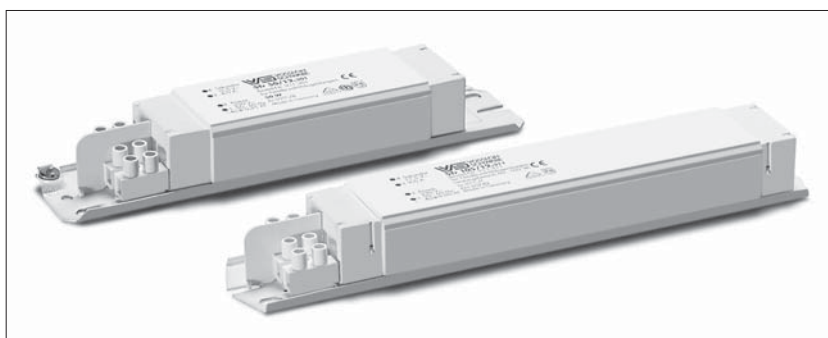

A

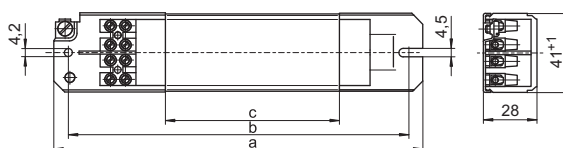

B

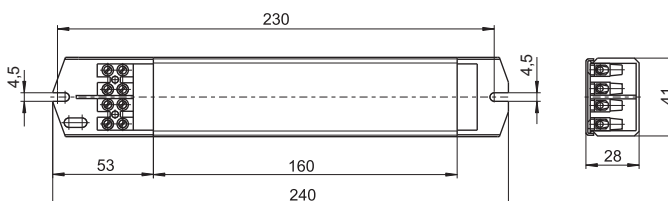


Safety transformers											Primary fuse
Type	Ref. No.	Capacity range W	50, 60 Hz V prim.	50, 60 Hz V sec.	Ambient temperature $t_a$ (°C)	Drawing	a mm	b mm	c mm	Weight kg	AT
<b>220 V/50, 60 Hz</b>											
STr 50/12.207	<b>500843</b>	35–50	220	11.5	40/B	A	175	165	83	0.73	0.250
<b>230 V/50, 60 Hz</b>											
STr 20/12.306	<b>161781</b>	15–20	230	11.5	60/B	A	155	140	63	0.55	0.125
STr 50/12.301	<b>161757</b>	35–50	230	11.5	50/B	A	195	180	92	0.80	0.250
STr 50/12.342	<b>507181</b>	35–50	230	11.5	40/B	A	175	165	83	0.73	0.250
STr 60/12.338	<b>179604</b>	40–60	230	11.5	50/F	A	195	180	92	0.80	0.315
STr 105/12.311	<b>170002</b>	60–105	230	11.5	30/F	B	240	230	160	1.33	0.500
<b>240 V/50, 60 Hz</b>											
STr 50/12.401	<b>169830</b>	35–50	240	11.5	45/B	A	195	180	92	0.80	0.250
STr 50/12.422	<b>502592</b>	35–50	240	11.5	40/B	A	175	165	83	0.73	0.250
STr 105/12.406	<b>169125</b>	60–105	240	11.5	50/H	B	240	230	160	1.33	0.500
<b>127 V/60 Hz</b>											
STr 50/12.109	<b>525791</b>	35–50	127	11.5	40/F	A	155	140	63	0.55	0.500


## Super-thin Electromagnetic Built-in Transformers with Thermal Cut-out 20–105 VA

Shape: 28 x 41 mm


Electromagnetic safety transformers  
for low-voltage halogen incandescent lamps 12 V  
Vacuum-impregnated with polyester resin  
Screw terminals: 0.5–2.5 mm<sup>2</sup>  
Protection class I  
Temperature switch with self-holding protection  
against overheating,  
no primary fuse necessary

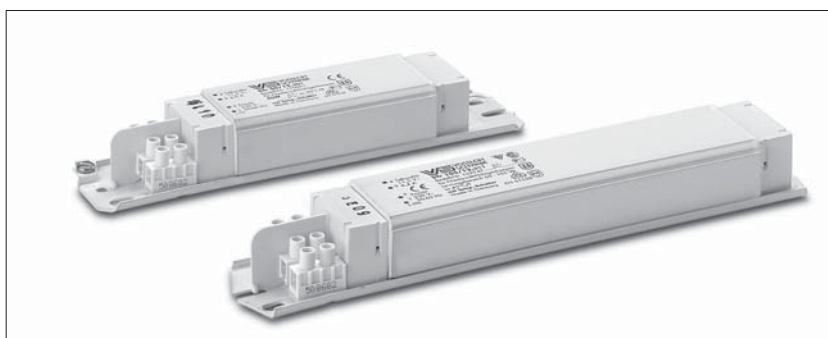

A

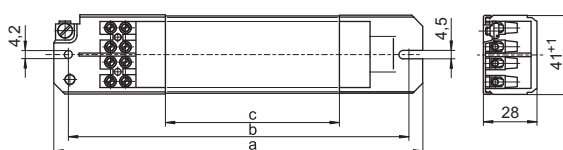

B

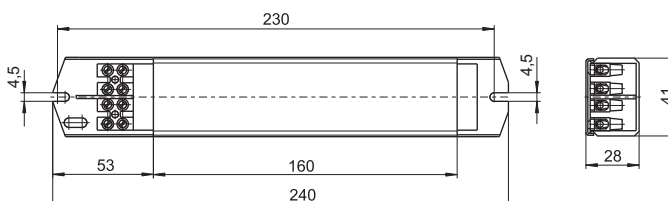

Type	Ref. No.	Capacity range W	50, 60 Hz		Ambient temperature $t_g$ (°C)	Drawing	a mm	b mm	c mm	Weight kg
			V prim.	V sec.						
<b>230 V/50, 60 Hz</b>										
STr 20/12.306	<b>161860</b>	15–20	230	11.5	60/B	A	155	140	63	0.55
STr 50/12.337	<b>179444</b>	35–50	230	11.5	50/F	A	175	165	83	0.73
STr 50/12.301	<b>170091</b>	35–50	230	11.5	50/B	A	195	180	92	0.80
STr 60/12.338	<b>179608</b>	40–60	230	11.5	50/F	A	195	180	92	0.80
STr 105/12.311	<b>169747</b>	60–105	230	11.5	45/F	B	240	230	160	1.33
<b>240 V/50, 60 Hz</b>										
STr 50/12.401	<b>169748</b>	35–50	240	11.5	45/B	A	195	180	92	0.80
STr 105/12.406	<b>161935</b>	60–105	240	11.5	50/H	B	240	230	160	1.33
<b>127 V/60 Hz</b>										
STr 50/12.109	<b>537403</b>	35–50	127	11.5	40/F	A	155	140	63	0.55

1

2

3

4

5

6

7

8

9

10



## Compact Electromagnetic Transformers 70–300 VA

**Shape: 85 x 85 mm (200 VA)**

**Shape: 99 x 85 mm (300 VA)**

Built-in electromagnetic safety transformers  
for low-voltage halogen incandescent lamps 12 V  
Fully encapsulated transformer in a plastic casing

Mains frequency: 50–60 Hz

Built-in primary fuse and temperature switch

Connections



primary: lead

secondary: screw terminals up to 6 mm<sup>2</sup>

Degree of protection: IP24

**Protection class II**

Suitable for installation in furniture  
and on combustible surfaces

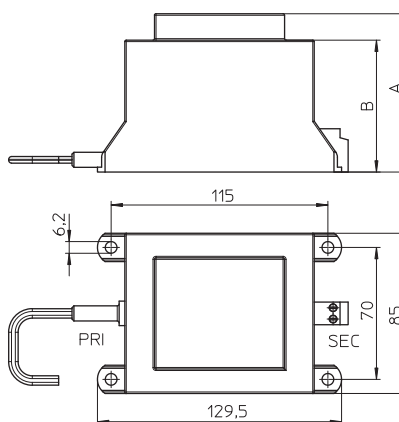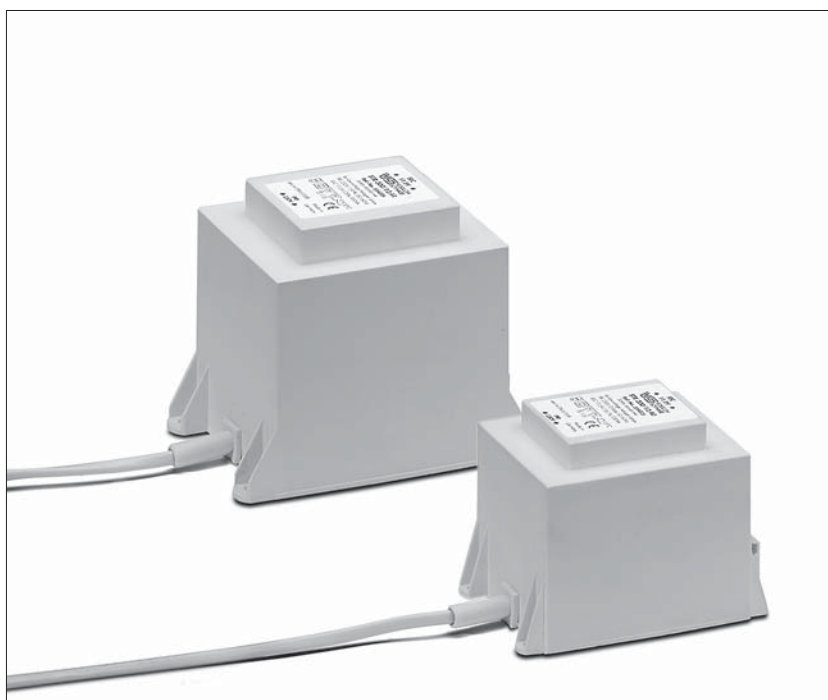

Type	Ref. No.	Capacity range W	Voltage AC V - 10%+6%		Ambient temperature $t_a$ °C	A mm	B mm	Weight kg
			prim.	sec.				
<b>230 V/50, 60 Hz</b>								
<b>new</b> STr 200/12.40	<b>554325</b>	70 - 200	230	12	40	85	70	2.9
<b>new</b> STr 300/12.41	<b>554326</b>	150 - 300	230	12	40	99	84	3.9

1

2

3

4

**5**

6


7

8

9

10

## LOW- AND MAINS VOLTAGE LAMP HOLDERS

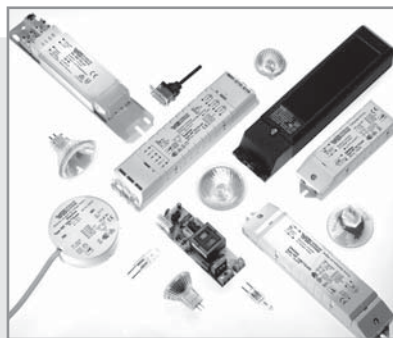

### LAMP HOLDERS FOR HALOGEN INCANDESCENT LAMPS

As the tungsten-halogen cycle and the high lamp current can cause very high temperatures when operating low-voltage halogen lamps, close attention must be paid to the luminaire's thermal conditions and components must be made of high-grade materials.

#### **VS lampholders for low-voltage halogen lamps**

The following chapter contains Vossloh-Schwabe's comprehensive range of connection elements, lampholders and accessories for safe and reliable installation in accordance with the latest regulations and developments.

#### **VS lampholders for mains voltage halogen lamps**

The following chapter contains Vossloh-Schwabe's comprehensive range of lampholders for single-ended halogen lamps (GU/GZ10 and G9 bases), lampholders for bayonet lamps (B15d and B22d bases) as well as lampholders for double-ended tubular lamps (R7s base).



**Lampholders for low-voltage halogen incandescent lamps**

G4, GZ4, G5.3, GX5.3, G6.35, GY6.35 lampholders, accessories

G4 lampholders, GZ4 lamp connectors

Lampholders with separate mounting spring for GU4 lamps

GX5.3 lamp connectors

GU5.3 lampholders

Lampholders with separate mounting spring for GU5.3 lamps

G6.35, GY6.35 lampholders, GZ6.35 lamp connectors

G53 lamp connectors

B15d, BA15d lampholders

**302–311**

302–303

304–306

306–307

307–308

308

309–310

310

311

311

**Lampholders for mains voltage halogen incandescent lamps**

B15d, BA15d lampholders

G9 lampholders, accessories

GU10, GZ10 lampholders, accessories

R7s thermoplastic lampholders

R7s ceramic lampholders

R7s metal lampholders

Connection boxes

Connectors

**311–321**

311

312–314

314–316

316

317–319

319

320

321

**Technical details for incandescent lamps**

General technical details

Glossary

**360–373**

394–401

402–404

1

2

3

4

5

6

7

8

9

10



## G4, GZ4, G5.3, GX5.3, G6.35, GY6.35 Lampholders, Accessories

### For low-voltage halogen incandescent lamps


The lampholders listed in this chapter permit the use of lamps with different bases. It is important to ensure that under no circumstances a lamp

with a smaller pin diameter is used if a lamp with a larger pin diameter has already been used.


G/GZ4, G/GX5.3, G/GY6.35 lampholder  
 Casing: LCP, natural, T270  
 Nominal rating: 8/24 (for G4/GZ4 lamps: 4/24)  
 Multipoint contacts: CuNiZn  
 Push-in terminals for stranded conductors with ferrule on bare end of core  $\varnothing$  1.4-1.8 mm  
 Fixing holes for screws M3  
 Weight: 2.4 g, unit: 1000 pcs.  
 Type: 33300  
**Ref. No.: 109547**




Cover caps  
 For push-fit onto lampholders type 333  
 External thread 20.8x2  
 Material: LCP, natural  
 Moulded thread: M10x1  
 Weight: 3.8 g, unit: 1000 pcs.  
 Type: 97255  
**Ref. No.: 109548**



Screw rings  
 For components with external thread 20.8x2  
 Weight: 1.7/1.4 g, unit: 1000 pcs.  
 Type: 97257  
**Ref. No.: 109550** PPS, black  
**Ref. No.: 507490** LCP, natural




G/GZ4, G/GX5.3, G/GY6.35 lampholder  
 Casing: LCP, natural, T270  
 Nominal rating: 8/24 (for G4/GZ4 lamps: 4/24)  
 Multipoint contacts: CuNiZn  
 Push-in terminals for stranded conductors with ferrule on bare end of core  $\varnothing$  1.4-1.8 mm  
 Fixing holes for screws M3  
 Weight: 2.6 g, unit: 1000 pcs.  
 Type: 33400  
**Ref. No.: 109674**

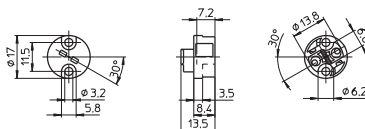


# Lampholders for Halogen Incandescent Lamps

G/GZ4, G/GX5.3, G/GY6.35 lampholder  
 Casing: steatite, T270  
 Nominal rating: 8/24 (for G4/GZ4 lamps: 4/24)  
 Multipoint contacts: CuNiZn  
 Push-in terminals for stranded conductors with ferrule on bare end of core  $\varnothing$  1.4–1.8 mm  
 Fixing holes for screws M4  
 Weight: 3.4 g, unit: 1000 pcs.  
 Type: 32210  
**Ref. No.: 543530**



1

G/GZ4, G/GX5.3, G/GY6.35 lampholder  
 Casing: ceramic, cover plate: mica  
 T350  
 Nominal rating: 10/24  
 Contacts: Ni  
 Leads: Cu nickel-plated, stranded conductors  
 0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm  
 Fixing holes for screws M3  
 Weight: 6.8 g, unit: 500 pcs.  
 Type: 32400  
**Ref. No.: 100939**




2

3

4


G/GZ4, G/GX5.3, G/GY6.35 lampholder  
 Casing: ceramic, cover plate: mica  
 T300  
 Nominal rating: 10/24  
 Multipoint contacts: CuNiZn  
 Leads: Cu nickel-plated, stranded conductors  
 0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm  
 Fixing holes for screws M3  
 Weight: 7.1 g, unit: 1000 pcs.  
 Type: 32700  
**Ref. No.: 101258**



5

6


G/GZ4, G/GX5.3, G/GY6.35 lampholder  
 Casing: ceramic, cover plate: mica  
 T300, nominal rating: 10/24  
 Multipoint contacts: CuNiZn  
 Leads: Cu nickel-plated, stranded conductors  
 0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm  
 Fixing plate: zinc-coated polished steel  
 Fixing holes for screws M3  
 Weight: 8.8 g, unit: 1000 pcs.  
 Type: 32720  
**Ref. No.: 101274**

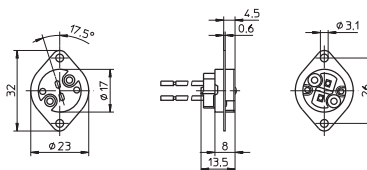

7

8

G/GZ4, G/GX5.3, G/GY6.35 lampholder  
 Casing: ceramic, cover plate: mica  
 T300, nominal rating: 10/24  
 Multipoint contacts: CuNiZn  
 Leads: Cu nickel-plated, stranded conductors  
 0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm  
 Fixing bracket: zinc-coated polished steel  
 Fixing holes for screws M3  
 Weight: 9.3 g, unit: 1000 pcs.  
 Type: 32730  
**Ref. No.: 101275**

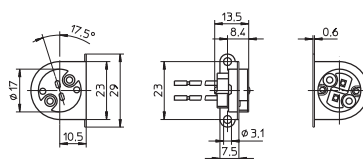

9

10

## G4 Lampholders, GZ4 Lamp Connectors

For low-voltage halogen incandescent lamps

G4 lampholder, GZ4 lamp connector

Casing: PPS, black, T240

Nominal rating: 4/24, multipoint contacts: steel

Leads: Cu tinned, stranded conductors 0.75 mm<sup>2</sup>,

Si-insulation, length: 140 mm

Option for lateral wiring



Lampholder height: 16 mm

Fixing holes for screws M3

Weight: 5.7 g, unit: 1000 pcs.

Type: 30400

**Ref. No.: 530024**

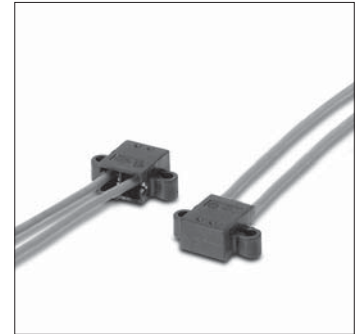

G4 lampholder, GZ4 lamp connector

Casing: PPS, black, T240

Nominal rating: 4/24, multipoint contacts: steel

Leads: Cu tinned, stranded conductors 0.75 mm<sup>2</sup>,

Si-insulation, length: 140 mm



Lampholder height: 12.8 mm

Fixing holes for screws M3

Weight: 5.5 g, unit: 1000 pcs.

Type: 30450

**Ref. No.: 530025**

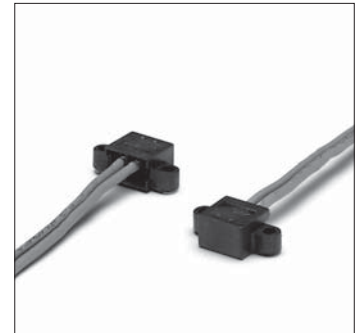

G4 lampholder, GZ4 lamp connector

Casing: PPS, black, T240

Nominal rating: 4/24, multipoint contacts: steel

Leads: Cu tinned, stranded conductors 0.75 mm<sup>2</sup>,

Si-insulation, length: 140 mm

Option for lateral wiring



Lampholder height: 16 mm

For push-fit onto the lamp

Weight: 5.3 g, unit: 1000 pcs.

Type: 30460

**Ref. No.: 530026**

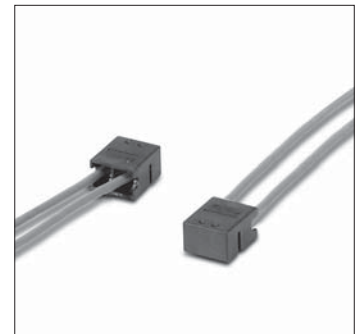

G4 lampholder, GZ4 lamp connector

Casing: PPS, black, T240

Nominal rating: 4/24, multipoint contacts: steel

Leads: Cu tinned, stranded conductors 0.75 mm<sup>2</sup>,

Si-insulation, length: 140 mm

Option for lateral and base wiring



Lampholder height: 12.8 mm

For push-fit onto the lamp

Weight: 5.1 g, unit: 1000 pcs.

Type: 30465

**Ref. No.: 530027**

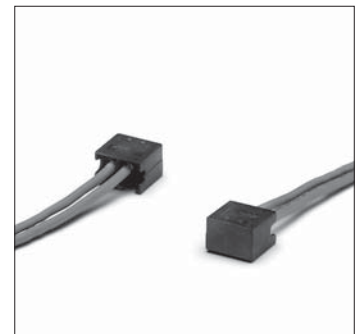

# Lampholders for Halogen Incandescent Lamps

## G4 lampholders

For push-fit into lampholder support 535267  
T240

Nominal rating: 2/50

Multipoint contacts: CuNiZn



Push-in terminals for stranded conductors  
with ferrule on bare end of core  $\varnothing$  1.4-1.8 mm

Weight: 1.5/1.6 g, unit: 1000 pcs.

Type: 30800

**Ref. No.: 535146** material: LCP

**Ref. No.: 535263** material: PPS

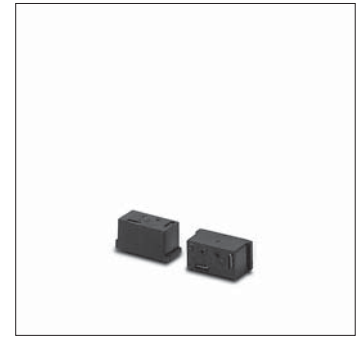

1

2

Lampholder support for G4 lampholders type 30800


Material: polyamide

Base split pins for wall thickness 0.6 mm

Weight: 0.8 g, unit: 500 pcs.

Type: 95300

**Ref. No.: 535267**



3

4

## G4 lampholders

Casing: PPS, black, T200

Nominal rating: 2/24

Contacts: Ni

Push-in terminals for stranded conductors  
with ferrule on bare end of core max.  $\varnothing$  1.8 mm


Weight: 4.4/5 g, unit: 1000 pcs.

Type: 32800 holes for screws M3

**Ref. No.: 106248**

Type: 32820 threaded bushes M3

**Ref. No.: 106249**

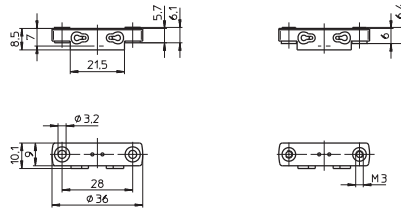

5

6

## G4 lampholder

Casing: PPS, black, T200

Nominal rating: 2/24

Multipoint contacts: CuNiZn

Leads: Cu tinned, stranded conductors 0.75 mm<sup>2</sup>,

Si-insulation brown/blue, length: 140 mm

Push-in fixing

Weight: 4.4 g, unit: 1000 pcs.

Type: 30485

**Ref. No.: 535988**



7

8

## G4 clip-in tube lampholder

With earth contact

Casing: PPS, black, T200

Nominal rating: 2/24

Multipoint contacts: CuNiZn

Lead: Cu tinned, stranded conductors 0.75 mm<sup>2</sup>,

Si-insulation blue, length: 140 mm

Push-in fixing

Weight: 2.7 g, unit: 1000 pcs.

Type: 30471

**Ref. No.: 108449**



9

10



# Lampholders for Halogen Incandescent Lamps

## G4 clip-in tube lampholder

With integrated cable holder for Teflon conductor

Casing: PPS, black, T200

Nominal rating: 2/24

Multipoint contacts: CuNiZn

Leads: Cu tinned, stranded conductors 0.61 mm<sup>2</sup>,


FEP-insulation brown/blue, length: 140 mm

Push-in fixing

Weight: 8.1 g, unit: 1000 pcs.

Type: 30470

**Ref. No.: 520865**



## G4 lampholder

Casing: PPS, black, T240

Nominal rating: 4/24

Multipoint contacts: steel

Leads: Cu tinned, stranded conductors 0.75 mm<sup>2</sup>,



Si-insulation, length: 140 mm

For push-fit onto the lamp

Weight: 4.7 g, unit: 1000 pcs.

Type: 34000

**Ref. No.: 507105**

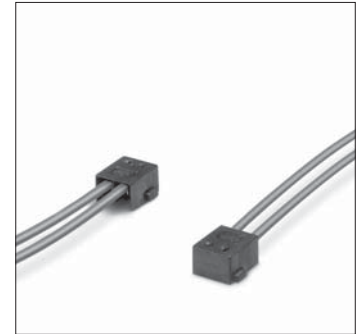

# Lampholders with Separate Mounting Spring for GU4 Lamps

## For low-voltage halogen incandescent lamps

### G/GZ4, G/GX5.3, G/GY6.35 lampholder

Casing: LCP, natural, T270

Nominal rating: 8/24 (for G4/GZ4 lamps: 4/24)

Multipoint contacts: CuNiZn

Push-in terminals for stranded conductors

with ferrule on bare end of core Ø 1.4–1.8 mm


Fixing holes for screws M3

For cover cap (see p. 304)

Weight: 2.4 g, unit: 1000 pcs.

Type: 33300

**Ref. No.: 109547**



### G/GZ4, G/GX5.3, G/GY6.35 lampholder

Casing: steatite, T270

Nominal rating: 8/24 (for G4/GZ4 lamps: 4/24)

Multipoint contacts: CuNiZn

Push-in terminals for stranded conductors


with ferrule on bare end of core Ø 1.4–1.8 mm

Fixing holes for screws M4

Weight: 3.4 g, unit: 1000 pcs.

Type: 32210

**Ref. No.: 543530**



# Lampholders for Halogen Incandescent Lamps

GU4 mounting spring for lamp


Material: stainless steel

For push-fit onto lampholders type 333 and 32210

Weight: 0.8 g, unit: 1000 pcs.

Type: 94095

**Ref. No.: 109553**



1

2

G/GZ4, G/GX5.3, G/GY6.35 lampholder

Casing: ceramic, cover plate: mica

T350

Nominal rating: 10/24

Contacts: Ni

Leads: Cu nickel-plated, stranded conductors


0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm

Fixing holes for screws M3

Weight: 6.8 g, unit: 500 pcs.

Type: 32400

**Ref. No.: 100939**



3

4

GU4 mounting spring for lamp

Material: stainless steel

The mounting spring has to be fastened

to the lampholder 100939.

The luminaire manufacturer is responsible for the attachment.

Weight: 1.6 g, unit: 1000 pcs.

Type: 94071

**Ref. No.: 108678**



5

6

## GX5.3 Lamp Connectors

**For low-voltage halogen incandescent lamps**

GX5.3 lamp connector

Casing: ceramic, cover plate: mica

T300, nominal rating: 10/24

Multipoint contacts: Ni

Leads: Cu nickel-plated, stranded conductors



1 mm<sup>2</sup>, PTFE-insulation, length: 145 mm

Fixing holes for screws M3

Weight: 13.3 g, unit: 1000 pcs.

Type: 32020

**Ref. No.: 400548**



7

8

9

10

# Lampholders for Halogen Incandescent Lamps

## GX5.3 lamp connector

Casing: ceramic, cover plate: mica

T300, nominal rating: 10/24

Multipoint contacts: Ni


Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 135 mm

Weight: 12 g, unit: 500 pcs.

Type: 32100

**Ref. No.: 100877**



## GX5.3 lamp connectors

Casing: ceramic, cover plate: mica

T300, nominal rating: 10/24

Multipoint contacts: Ni

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm


Weight: 7.8/8.5 g, unit: 500 pcs.

Type: 32600 holes for screws M3

**Ref. No.: 101162**

Type: 32620 threaded bushes M3

**Ref. No.: 101207**



# GU5.3 Lampholders

## For low-voltage halogen incandescent lamps

### GU5.3 lampholder

Casing: ceramic, cover plate: mica

T350, nominal rating: 10/24

Contacts: Ni

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm


Fixing holes for screws ST2.9

Mounting spring for lamp: stainless steel

Weight: 9.1 g, unit: 1000 pcs.

Type: 32480

**Ref. No.: 106457**

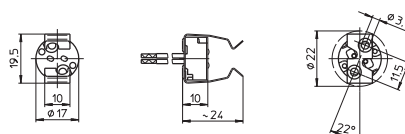

### GU5.3 lampholders

Casing: ceramic, cover plate: mica

T300, nominal rating: 10/24, multipoint contacts: Ni

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm

Mounting spring for lamp: stainless steel


Weight: 11/12 g, unit: 500 pcs.

Type: 32680 holes for screws M3

**Ref. No.: 101248**

Type: 32690 threaded bushes M3

**Ref. No.: 101253**

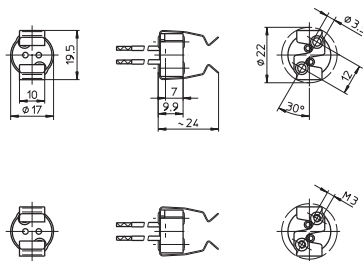


## Lampholders with Separate Mounting Spring for GU5.3 Lamps

For low-voltage halogen incandescent lamps


G/GZ4, G/GX5.3, G/GY6.35 lampholder  
 Casing: LCP, natural, T270  
 Nominal rating: 8/24 (for G4/GZ4 lamps: 4/24)  
 Multipoint contacts: CuNiZn  
 Push-in terminals for stranded conductors  
 with ferrule on bare end of core  $\varnothing$  1.4-1.8 mm  
 Fixing holes for screws M3  
 For cover cap (see p. 304)  
 Weight: 2.4 g, unit: 1000 pcs.  
 Type: 33300

**Ref. No.: 109547**




G/GZ4, G/GX5.3, G/GY6.35 lampholder  
 Casing: steatite, T270  
 Nominal rating: 8/24 (for G4/GZ4 lamps: 4/24)  
 Multipoint contacts: CuNiZn  
 Push-in terminals for stranded conductors  
 with ferrule on bare end of core  $\varnothing$  1.4-1.8 mm  
 Fixing holes for screws M4  
 Weight: 3.4 g, unit: 1000 pcs.  
 Type: 32210

**Ref. No. 543530**




GU5.3 mounting spring for lamp  
 Material: stainless steel  
 For push-fit onto lampholders type 333 and 32210  
 Weight: 1.1 g, unit: 1000 pcs.  
 Type: 94096

**Ref. No.: 109554**



G/GZ4, G/GX5.3, G/GY6.35 lampholder  
 Casing: ceramic, cover plate: mica  
 T350  
 Nominal rating: 10/24  
 Contacts: Ni  
 Leads: Cu nickel-plated, stranded conductors  
 0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm  
 Fixing holes for screws M3  
 Weight: 6.8 g, unit: 500 pcs.  
 Type: 32400

**Ref. No.: 100939**



1

2

3

4

5

6

7

8

9

10

# Lampholders for Halogen Incandescent Lamps

GU5.3 mounting spring for lamp

Material: stainless steel


The mounting spring has to be fastened to the lampholder 100939.

The luminaire manufacturer is responsible for the attachment.

Weight: 2 g, unit: 1000 pcs.

Type: 94060

**Ref. No.: 106256**



## G6.35, GY6.35 Lampholders, GZ6.35 Lamp Connectors

**For low-voltage halogen incandescent lamps**

G/GY6.35 lampholder, GZ6.35 lamp connector

Casing: ceramic, cover plate: mica

T300, nominal rating: 10/24

Multipoint contacts: Ni

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm


Fixing holes for screws M3

Lamp fixing holes: diagonal

Weight: 11 g, unit: 500 pcs.

Type: 30300

**Ref. No.: 100662**



G/GY6.35 lampholder, GZ6.35 lamp connector

Casing: ceramic, cover plate: mica

T300, nominal rating: 10/24

Multipoint contacts: Ni

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 140 mm


Fixing holes for screws M3

Lamp fixing holes: axial

Weight: 12 g, unit: 500 pcs.

Type: 30350

**Ref. No.: 108674**





## G53 Lamp Connectors

**For low-voltage halogen incandescent lamps**

G53 lamp connector  
 Casing: PPS, black  
 Nominal rating: 10/24  
 Contacts: CuNiZn  
 Lead: Cu tinned, stranded conductors 0.75 mm<sup>2</sup>,  
 Si-insulation, length: 140 mm

Fixing hole for screw M4  
 Lead exit: lateral  
 Weight: 4.4 g, unit: 1000 pcs.  
 Type: 33100

**Ref. No.: 107694**

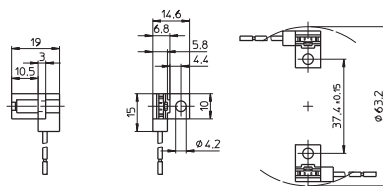

## B15d, BA15d Lampholders

**For low-voltage and mains voltage halogen incandescent lamps**


One-piece contact pins with screw terminals  
 to reduce voltage drop.  
 When using lampholders without cap it has to  
 be ensured protection from electric shock as well  
 as sufficient creepage distances and clearances  
 from live parts on the back of lampholders.

B15d, BA15d lampholders  
 Casing with fixing flange: zinc-coated polished steel  
 Insert: ceramic, T230  
 Nominal rating: 8/250  
 Fixing holes for screws M3  
 Weight: 15/16 g, unit: 500 pcs.  
 Type: 78100

**Ref. No.: 102923**

Type: 78101 with earth terminal


**Ref. No.: 102925**



B15d, BA15d lampholder  
 Casing: zinc-coated polished steel  
 Insert: ceramic, T230, nominal rating: 8/250  
 With earth terminal  
 Cover cap: PBT GF, max. 180 °C  
 External thread 28x2 IEC 60399  
 For E14 metal screw rings  
 Weight: 17/11.5 g, unit: 500 pcs.  
 Type: 78201

**Ref. No.: 106513** insert

**Ref. No.: 106583** cap M10x1



1

2

3

4

5

6

7

8

9

10

## G9 Lampholders, Accessories

**For mains voltage halogen incandescent lamps**

For luminaires of protection class II

G9 lampholder


Casing: ceramic, cover plate: LCP, natural  
T300, nominal rating: 2/250

Push-in twin terminals for stranded conductors  
with ferrule on bare end of core  $\varnothing$  1.4-1.8 mm

Weight: 7.5 g, unit: 1000 pcs.

Type: 33800

**Ref. No.: 509357**



G9 lampholder

Casing: ceramic, T300, nominal rating: 2/250

Leads: Cu nickel-plated, stranded conductors


0.75 mm<sup>2</sup>, double PTFE-insulation,

length: 180 mm

Weight: 12.8 g, unit: 1000 pcs.

Type: 33906

**Ref. No.: 532610**



Metal bracket with nipple

For G9 lampholders type 338/339


Material: zinc-coated steel

Female nipple: M10x1

Weight: 7.8 g, unit: 1000 pcs.

Type: 94455

**Ref. No.: 520880**



Metal brackets

For G9 lampholders type 338/339

Material: zinc-coated steel

Fixing holes for screws M3


Weight: 1.5/3.5 g, unit: 1000 pcs.

Type: 94457

**Ref. No.: 520882**

Type: 80280 with bracket 90°

**Ref. No.: 521010**



# Lampholders for Halogen Incandescent Lamps

Cover cap for G9 lampholders type 338/339

Material: LCP


External thread 20.8x2

Moulded thread: M10x1

Weight: 3.2 g, unit: 1000 pcs.

Type: 97760

**Ref. No.: 525583**



1

G9 lampholder with external thread 20.8 x 2

Casing: steatite, T300

Nominal rating: 2/250

For luminaires of protection class II


Push-in twin terminals for stranded conductors with ferrule on bare end of core  $\varnothing$  1.5-1.8 mm

Fixing holes for screws M3

Weight: 14.5 g, unit: 500 pcs.

Type: 33890

**Ref. No.: 535610**



3

4

G9 lampholders with external thread 20.8x2

Casing: LCP, nominal rating: 2/250

Push-in terminals for stranded conductors

with ferrule on bare end of core  $\varnothing$  1.4-1.8 mm

Fixing holes for screws M2.5

Bayonet fixing for cover caps


Weight: 8.6/8.2/6 g, unit: 1000 pcs.

Type: 33700/33710

**Ref. No.: 506398** insert: ceramic, natural, T300

**Ref. No.: 507470** insert: ceramic, natural, T270

**Ref. No.: 508306** insert: LCP, natural, T270



5

6

Screw rings


For components with external thread 20.8x2

Weight: 1.7/1.4 g, unit: 1000 pcs.

Type: 97257

**Ref. No.: 109550** PPS, black

**Ref. No.: 507490** LCP, natural



7

8

Metal screw rings

For components with external thread 20.8x2

Material: zinc-coated polished steel


Weight: 1.6/2 g, unit: 1000 pcs.

Type: 93034  $\varnothing$  27 mm, height: 7 mm

**Ref. No.: 509110**

Type: 93035  $\varnothing$  27 mm, height: 11 mm

**Ref. No.: 509118**



9

10





# Lampholders for Halogen Incandescent Lamps

## G9 lampholder

Casing: ceramic, cover plate: LCP, natural  
 T270, nominal rating: 2/250  
 Push-in twin terminals for stranded conductors  
 with ferrule on bare end of core  $\varnothing$  1.4–1.8 mm  
 Fixing holes for screws M3  
 Weight: 14.4 g, unit: 1000 pcs.  
 Type: 33500

**Ref. No.: 502004**

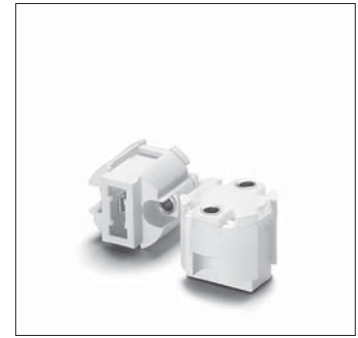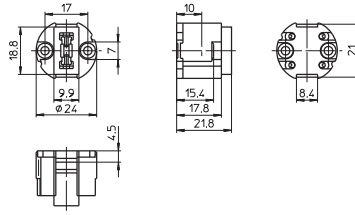


## Cover caps for G9 lampholder 502004

Material: LCP, natural  
 External thread 28x2 IEC 60399  
 Fixing holes for screws M3  
 Weight: 8.7/4.6 g, unit: 1000 pcs.  
 Type: 83310 female nipple: M10x1

**Ref. No.: 505951**

Type: 97268 moulded thread: M10x1


**Ref. No.: 501942**



## Screw ring

For components with external thread 28x2  
 Material: PPS, black  
 $\varnothing$  34 mm, height: 7.5 mm  
 Weight: 1.9 g, unit: 1000 pcs.  
 Type: 05202

**Ref. No.: 502503**



# GU10, GZ10 Lampholders, Accessories


## For mains voltage halogen incandescent lamps

### GU10, GZ10 lampholders

Casing: LCP, natural, T270, nominal rating: 2/250  
 Push-in twin terminals for stranded conductors  
 with ferrule on bare end of core  $\varnothing$  1.4–1.8 mm  
 Fixing holes for screws M3  
 Weight: 7 g, unit: 1000 pcs.  
 Type: 31000/31010

**Ref. No.: 108979** GU10, GZ10 lampholder

**Ref. No.: 109007** GU10 lampholder



# Lampholders for Halogen Incandescent Lamps

GU10, GZ10 lampholders

For luminaires of protection class II

Casing: LCP, natural, T270, nominal rating: 2/250

Push-in twin terminals for stranded conductors with ferrule on bare end of core  $\varnothing$  1.4–1.8 mm


Fixing holes for screws M3

Weight: 8 g, unit: 1000 pcs.

Type: 31020/31030

**Ref. No.: 502111** GU10, GZ10 lampholder

**Ref. No.: 502112** GU10 lampholder



1

2

Cover cap for GU10, GZ10 lampholders type 310

Material: PA GF, black


Moulded thread: M10x1

Fixing holes for screws M3

Weight: 3.4 g, unit: 1000 pcs.

Type: 97244

**Ref. No.: 109411**



3

4

Cover cap for lampholders 502111/502112

External thread 32x2


Material: LCP, natural

Moulded thread: M10x1

Weight: 6 g, unit: 1000 pcs.

Type: 97320

**Ref. No.: 502064**



5

6

Screw ring

For components with external thread 32x2


$\varnothing$  38.9 mm, height: 7.5 mm

Material: PPS, black

Weight: 2.3 g, unit: 1000 pcs.

Type: 97282

**Ref. No.: 502416**



7

8

GU10, GZ10 lampholders

Casing: steatite, cover plate: PPS

T240, nominal rating: 2/250

Push-in terminals for stranded conductors with ferrule on bare end of core  $\varnothing$  1.5–1.8 mm


Fixing holes for screws M3

Weight: 13.6/14 g, unit: 500 pcs.

Type: 31755/31705

**Ref. No.: 535034** GU10, GZ10 lampholder

**Ref. No.: 535032** GU10 lampholder

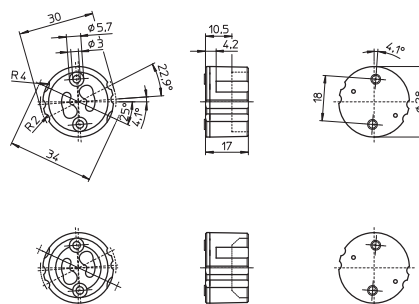

9

10

Cover caps for lampholders type 315/317

Material: PBT GF

Front fixing holes for self-tapping

screws acc. to ISO 1481/7049-ST2.9-C/F

Cord grip: twist and block (for single-core leads)


Rear lead exit: max.  $\varnothing$  2.5 mm

Weight: 6.9 g, unit: 500 pcs.

Type: 97765

**Ref. No.: 536164** black

**Ref. No.: 543615** grey



GU/GZ10 Lampholder set

For luminaires of protection class II

Casing lampholder: steatite, cover plate: PPS

T240, nominal value: 2/250


Cover cap with cord grip: PBT GF

Leads: Cu, stranded conductors

0.5 mm<sup>2</sup>, double FEP-insulation, length: 150 mm

Weight: 25 g, unit: 500 pcs.

Type: 31760



**new** **Ref. No. 554662**

## R7s Thermoplastic Lampholders

**For mains voltage halogen incandescent lamps**

R7s lampholders

Casing: LCP, black, T270

Contact pin: Ni, nominal rating: 2/250

Lead: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 300 mm

Fixing holes for screws M4



Weight: 15.5 g, unit: 25 pcs.

Type: 31690 lead exit right

**Ref. No.: 504296**

Type: 31691 lead exit left

**Ref. No.: 504297**

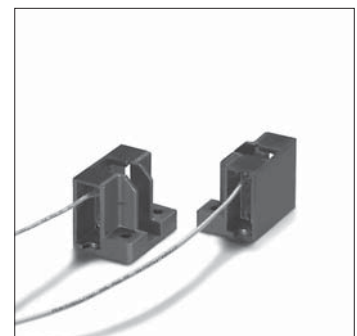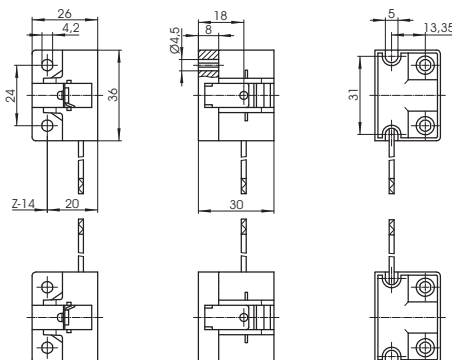

## R7s Ceramic Lampholders

### For mains voltage halogen incandescent lamps

The luminaire design must ensure protection from electric shock as well as sufficient creepage distances and clearances from live parts on the back of lampholder.

If the central hole on the bracket is used for fixing there must be a support within the luminaire to ensure that the bracket cannot be deformed.

Partly enclosed R7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 8/250

Leads: Cu nickel-plated, stranded conductors



0.75 mm<sup>2</sup>, PTFE-insulation, length: 200 mm

With fixing screw M4

Weight: 25.4 g, unit: 400 pcs.

Type: 32300

**Ref. No.: 100912**

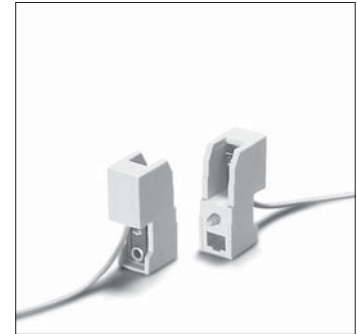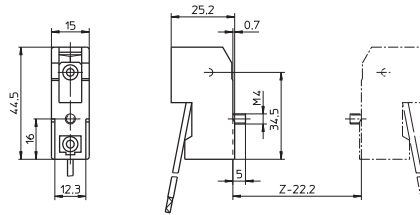

Partly enclosed R7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 8/250

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 200 mm



Oblong holes for screws M3/M4

Central hole for screw M4

Weight: 59.3 g, unit: 200 pcs.

Type: 32390 contact distance: 74.9 mm

**Ref. No.: 107213**

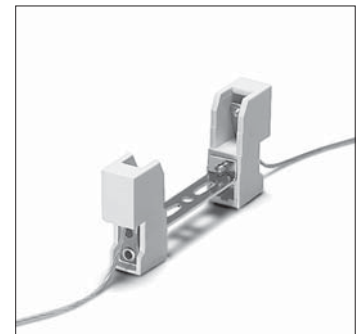

Partly enclosed R7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 8/250

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 200 mm


Oblong holes for screws M3/M4

Central hole for screw M4

Weight: 61 g, unit: 200 pcs.

Type: 32391 contact distance: 74.9 mm

**Ref. No.: 107214**



Partly enclosed R7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 8/250

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 200 mm



Oblong holes for screws M3/M4

Central hole for screw M4

Weight: 61.3 g, unit: 200 pcs.

Type: 32395 contact distance: 74.9 mm

**Ref. No.: 107215**

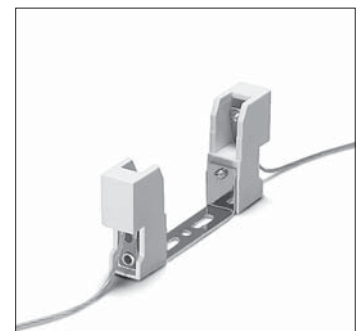

# Lampholders for Halogen Incandescent Lamps

Partly enclosed R7's lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 8/250

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 200 mm



Oblong holes for screws M4

Central hole for screw M4

Weight: 64.9 g, unit: 200 pcs.

Type: 32310 contact distance: 114.2 mm

**Ref. No.: 107195**

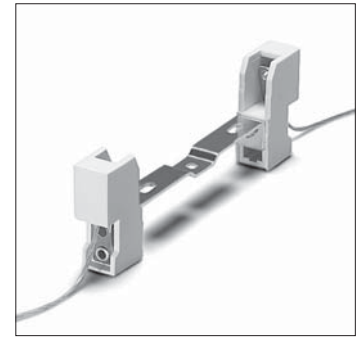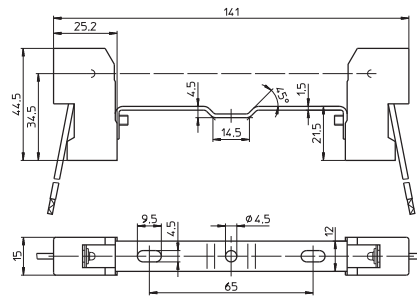

Partly enclosed R7's lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 8/250

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 200 mm



Oblong holes for screws M4

Central threaded bush M4

Weight: 66.5 g, unit: 200 pcs.

Type: 32320 contact distance: 114.2 mm

**Ref. No.: 107194**

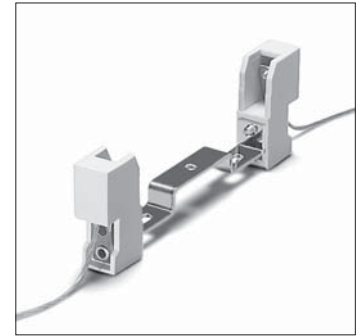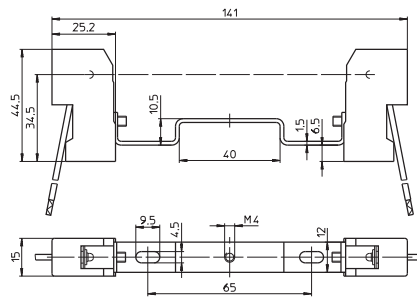

Partly enclosed R7's lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 8/250

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 200 mm



Oblong holes for screws M4

Central hole for screw M4

Weight: 65.4 g, unit: 200 pcs.

Type: 32340 contact distance: 114.2 mm

**Ref. No.: 107193**

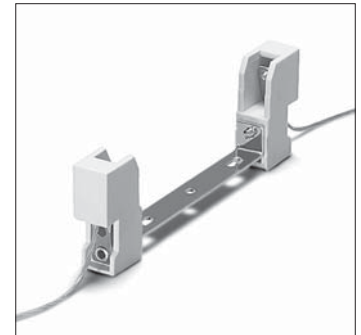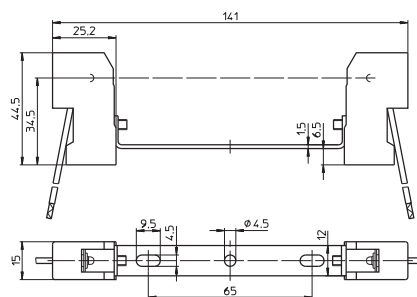

Partly enclosed R7's lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 8/250

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 200 mm



Oblong holes for screws M4

Central hole for screw M5

Weight: 66.7 g, unit: 200 pcs.

Type: 32360 contact distance: 114.2 mm

**Ref. No.: 107192**

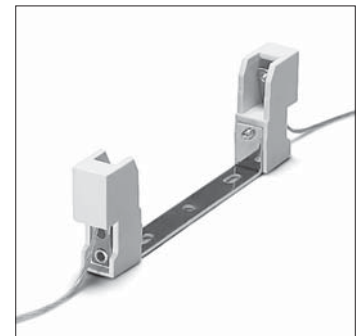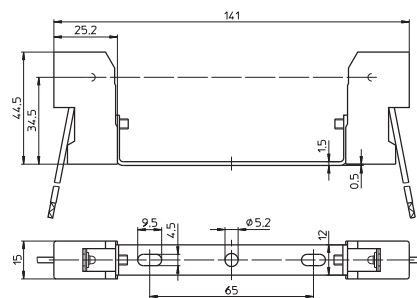

Partly enclosed R7's lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 8/250

Leads: Cu nickel-plated, stranded conductors

0.75 mm<sup>2</sup>, PTFE-insulation, length: 200 mm



Oblong holes for screws M4

Central hole for screw M5

Weight: 71.3 g, unit: 200 pcs.



Type: 32380 contact distance: 114.2 mm

**Ref. No.: 109497**

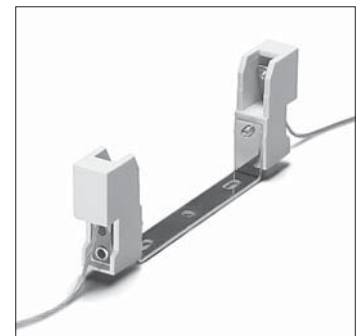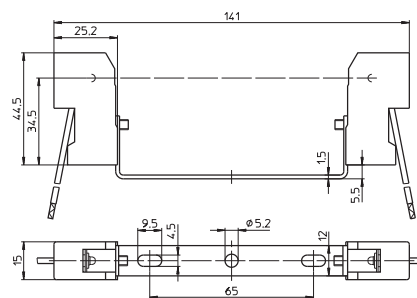

# Lampholders for Halogen Incandescent Lamps

Protection cap for R7s lampholders  
 For push-fit onto lampholders type 323  
 Protection against electrical shock  
 on the rear side of the lampholder  
 Lampholder with assembled protection cap on request  
 Material: LCP, natural  
 Weight: 0.7 g, unit: 1000 pcs.  
 Type: 97528  
**Ref. No.: 507592**

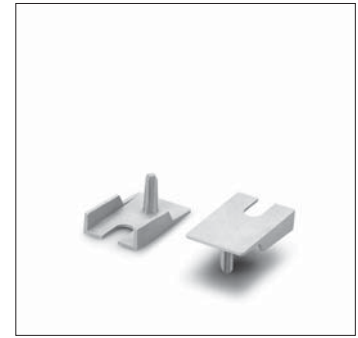

1

2



3

4

## R7s Metal Lampholders

For mains voltage halogen incandescent lamps


R7s lampholder  
 Casing: Al, T300, contact pin: Ni  
 Nominal rating: 10/250  
 Lead: Cu nickel-plated, stranded conductors  
 0.75 mm<sup>2</sup>, PTFE-insulation, length: 300 mm  
 Fixing flange  
 Fixing holes for screws M4  
 Weight: 21 g, unit: 50 pcs.  
 Type: 30023  
**Ref. No.: 100616**

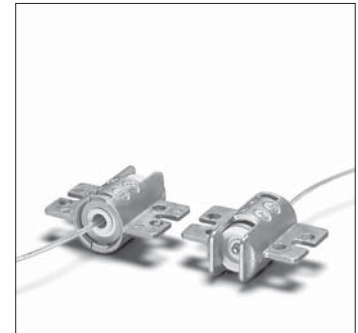

5

6


R7s lampholder  
 Casing: Al, T300, contact pin: Cu, silver bulb  
 Nominal rating: 10/250  
 Lead: Cu nickel-plated, stranded conductors  
 1 mm<sup>2</sup>, PTFE-insulation, length: 300 mm  
 Fixing flange  
 Fixing holes for screws M3  
 Weight: 15.7 g, unit: 1000 pcs.  
 Type: 30523  
**Ref. No.: 100710**



7

8

R7s lampholder  
 Casing: Al, T300, contact pin: Cu, silver bulb  
 Nominal rating: 10/250  
 Lead: Cu nickel-plated, stranded conductors  
 1 mm<sup>2</sup>, PTFE-insulation, length: 350 mm  
 Fixing bracket  
 Fixing holes for screws M4  
 Weight: 24.8 g, unit: 500 pcs.  
 Type: 30550  
**Ref. No.: 100720**




9

10

## Connection Boxes

For connecting downlights in false ceilings according to standards  
The luminaire manufacturer is responsible for the right choice of accessories.

### Application examples for connection box

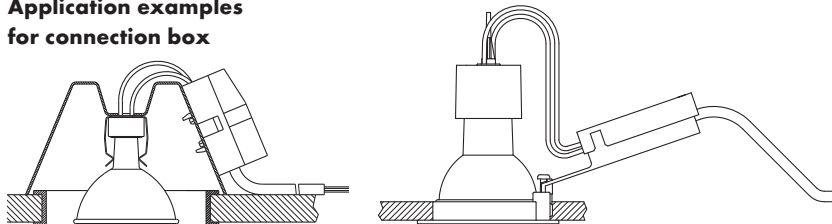

Connection box

Material: PC, black

Split pins for wall thickness 0.5–1.5 mm



With integrated 2-pole terminal block and contact bushings: 2.5 mm<sup>2</sup>

With cord grip

Weight: 18 g, unit: 500 pcs.

Type: 85007

**Ref. No.: 108940**

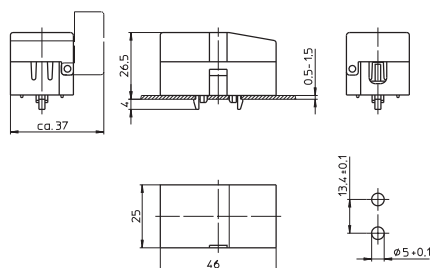

Connection boxes

Material: PA, black

With integrated 2-pole terminal block for leads with cross-section: 0.5–2.5 mm<sup>2</sup>

Cord grip on primary side for leads

H03VV-F/H05VV-F (Ø 5–7 mm) and single-core Ø 3–7 mm

Cord grip on secondary side for

single-core Teflon leads up to Ø 3 mm

and single-core PVC leads up to Ø 2.2 mm

Weight: 21.8/20.1 g, unit: 500 pcs.

Type: 85011/85012 plastic bracket

with locking screw





**Ref. No.: 543048** 12 V

**Ref. No.: 543049** 230 V

Type: 85013/85014 for fixing screw

**Ref. No.: 543053** 12 V

**Ref. No.: 543054** 230 V

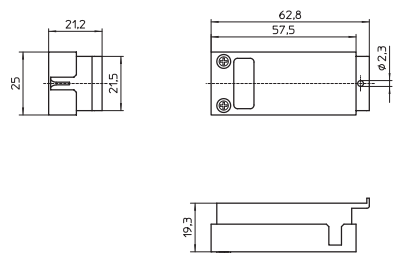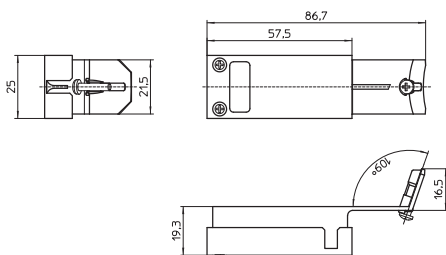

Connection boxes

With plastic bracket with locking screw

Material: PA, black

With integrated 3-pole terminal block for leads with cross-section: 0.75–4 mm<sup>2</sup>

Cord grip on primary side for leads Ø 2.5–11 mm

Cord grip on secondary side for

single-core Teflon leads up to Ø 1.8 mm



and single-core PVC leads up to Ø 2.2 mm

Weight: 28.7 g, unit: 500 pcs.

Type: 85015/85016

**Ref. No.: 543058** 12 V

**Ref. No.: 543059** 230 V

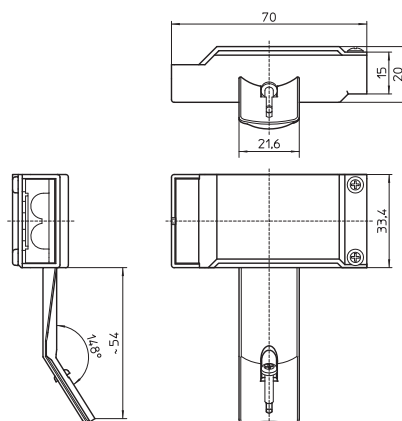

## Connectors

Modular system for various assembly options  
Connectors can be delivered pre-assembled  
with lampholder and lead assemblies



Male and female plug  
Nominal rating: 7/600  
For cable: 0.3–0.9 mm<sup>2</sup>  
For crimping on the end of lead  
Material: brass, tinned  
Weight: 0.1 g, unit: 5000 pcs.

Type: 93088 male plug

**Ref. No.: 505251**

Type: 93089 female plug

**Ref. No.: 506807**

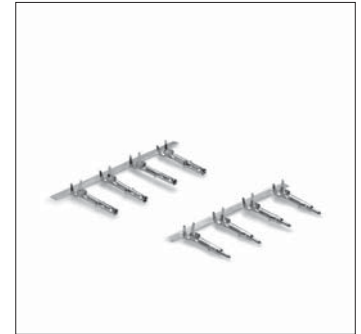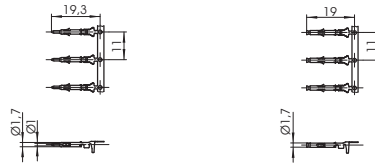

Male and female casing  
For male and female plug  
For push-fit assembly  
Material: PA, natural  
Weight: 0.8/1 g, unit: 2500 pcs.

Type: 97355 male casing

**Ref. No.: 509295** UL94V-0

**Ref. No.: 508562** UL94V-2

Type: 97356 female casing

**Ref. No.: 509296** UL94V-0

**Ref. No.: 508563** UL94V-2



1

2

3

4

5

6

7


8

9

10



## LAMPHOLDERS MADE OF THERMOPLASTICS, METAL AND PORCELAIN

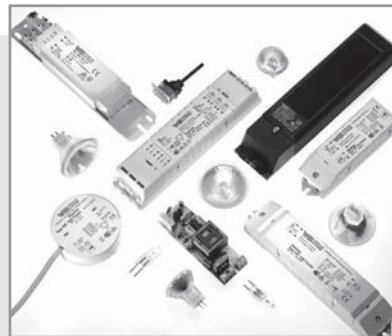

### LAMPHOLDERS FOR GENERAL-SERVICE INCANDESCENT AND RETROFIT LAMPS

The general-service light bulb owes its name to its bulbous shape, which has remained almost unchanged to this day. The tungsten filament contained within the bulb's glass shell, in which there used to be a vacuum but which is nowadays more usually filled with an inert gas, begins to glow as electricity is passed through it. Despite the considerable technical progress that has been made, the typical disadvantages associated with light bulbs still remain. For instance, incandescent lamps mainly radiate heat with no more than 5-10% light output and have a service life of approx. 1000 operating hours.

As a result of energy-efficiency regulations in the various regions of the world, the use of all-purpose incandescent lamps has been limited or even banned. Nonetheless, thanks to the many different shapes and surfaces of lamp bulbs, all-purpose incandescent lamps still have a firm place in decorative residential lighting applications and are often an important feature of luminaire designs. Retrofit lamps that comply with energy-efficiency regulations are increasingly being used as a replacement for all-purpose incandescent lamps and use the same lampholder systems found with E12/E14, E26/E27, E39/E40, B15d and B22d bases.

#### **VS lampholders for general-service incandescent and retrofit lamps**

Depending on the operating conditions, lampholders can be made of thermoplastics, metal or porcelain. Metal lampholders are most often used for high-grade decorative luminaires. In accordance with protection class I, metal lampholders must be included in the measures taken to earth the luminaire.

Due to their heat resistance, Edison lampholders made of porcelain are frequently used for higher-output lamps. Classic lampholder materials like metal and porcelain are increasingly being displaced by modern thermoplastics.



**E14 lampholders**

E14 thermoplastic lampholders, one-piece and cover caps	324-328
E14 table lamp set	329
E14 thermoplastic lampholders, three-piece	329-331
E14 metal lampholders, three-piece	332
E14 thermoplastic rocker switch lampholders	333
E14 lampholder for emergency lighting	333

**E27 lampholders**

E27 thermoplastic lampholders, one-piece and cover caps	334-338
E27 table lamp set	339
E27 renovation kit lampholders	339
E27 thermoplastic lampholders, three-piece	340-342
E27 porcelain lampholders	343-344
E27 metal lampholders, three-piece	345
E27 thermoplastic pull-switch lampholders	346-347
E27 metal pull-switch lampholders	347-348
E27 thermoplastic rocker switch lampholders	348-349
E27 thermoplastic rotary switch lampholders	349
E27 festoon lampholders	350

**B22d lampholders, accessories****Accessories for E14, E27 and B22d lampholders****E40 porcelain lampholders****Technical details for incandescent lamps**

General technical details	394-401
Glossary	402-404

**324-333**

324-328
329
329-331
332
333
333

**334-350**

334-338
339
339
340-342
343-344
345
346-347
347-348
348-349
349
350

**351-352****352-358****358-359****360-373**

394-401
402-404

1

2

3

4

5

6

7

8

9

10

## E14 Thermoplastic Lampholders, One-piece

### For incandescent lamps with base E14

E14 lampholders with temperature marking  
T180 on request.  
Brass-finished versions are available on request.

E14 lampholders, for cover caps

Plain casing

Casing: PET GF, T210, nominal rating: 2/250

Push-in twin terminals: 0.5–1.5 mm<sup>2</sup>

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST2.9-C/F

Weight: 11.3/11.4 g, unit: 1000 pcs.

Type: 64001

**Ref. No.: 109384** white

**Ref. No.: 109383** black



E14 lampholders, for cover caps

External thread 28x2 IEC 60399

Casing: PET GF, T210, nominal rating: 2/250

Push-in twin terminals: 0.5–1.5 mm<sup>2</sup>

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST2.9-C/F

Weight: 12.5/12.2 g, unit: 1000 pcs.

Type: 64101

**Ref. No.: 109387** white

**Ref. No.: 109386** black



E14 lampholders, for cover caps

External thread 28x2 IEC 60399, with flange

Casing: PET GF, T210, nominal rating: 2/250

Push-in twin terminals: 0.5–1.5 mm<sup>2</sup>

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST2.9-C/F

Weight: 12.7 g, unit: 1000 pcs.

Type: 64201

**Ref. No.: 503924** white

**Ref. No.: 503923** black

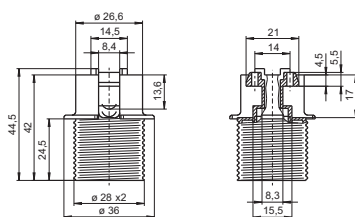

E14 lampholders, for cover caps

Profiled shape, short external thread 28x2 IEC 60399

Casing: PET GF, T210, Nominal rating: 2/250

Push-in twin terminals: 0.5–1.5 mm<sup>2</sup>

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST2.9-C/F

Weight: 8.5/8.4 g, unit: 1000 pcs.

Type: 64370

**Ref. No.: 546456** white

**Ref. No.: 546454** black



# Lampholders for General-service Incandescent and Retrofit Lamps

## E14 lampholders

Profiled shape, short external thread 28x2 IEC 60399

Casing: PET GF, T210, nominal rating: 2/250

Push-in twin terminals: 0.5-1.5 mm<sup>2</sup>


For clipping-in

Weight: 6.6/6.8 g, unit: 1000 pcs.

Type: 64360

**Ref. No.: 506247** white

**Ref. No.: 506249** black



1

2

## E14 lampholders

Profiled shape, nominal rating: 2/250

Push-in twin terminals: 0.5-1.5 mm<sup>2</sup>

Lateral push-fit foot for cut-out 10x20 mm

for wall thickness 0.6-1.3 mm

Tilt of lamp axis: 6°



For cover cap 503579 (see p. 325)

Weight: 9.1/9.2 g, unit: 1000 pcs.

Type: 64307

**Ref. No.: 108983** PBT GF, white, T180

**Ref. No.: 509263** PET GF, natural, T210



3

4

## E14 lampholder

Profiled shape

Casing: PET GF, white, T210

Nominal rating: 2/250

Push-in twin terminals: 0.5-1.5 mm<sup>2</sup>

For insertion, clipping-in or bayonet fixing


for plastic cut-out: Ø 27.5 mm

with wall thickness: 2.5 mm

Weight: 7.1 g, unit: 1000 pcs.

Type: 64308

**Ref. No.: 533820**

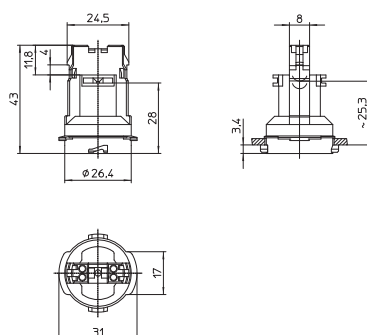

5

6

## Cover Caps

### For E14 thermoplastic lampholders, one-piece

Brass-finished versions are available on request.

Cover cap for lampholders type 64307


For luminaires of protection class II

Material: PP, white

Weight: 2.4 g, unit: 1000 pcs.

Type: 97322

**Ref. No.: 503579**



7

8

9

10

# Lampholders for General-service Incandescent and Retrofit Lamps

Cover caps

Material: PA GF


Female nipple: M10x1

Weight: 7.6/8.8 g, unit: 1000 pcs.

Type: 85075

**Ref. No.: 109110** white

**Ref. No.: 109112** black



Cover caps

Material: PA GF

Moulded thread: M10x1


Rotation stop: external

Weight: 2.7 g, unit: 1000 pcs.

Type: 97636

**Ref. No.: 109676** white

**Ref. No.: 109677** black



Cover caps

Material: PA GF

Moulded thread: M10x1

Rotation stop: external


With locking screw

Weight: 3 g, unit: 1000 pcs.

Type: 85076

**Ref. No.: 400818** white

**Ref. No.: 400817** black



Cover caps

Height: 19 mm

Material: PA GF

Moulded thread: M10x1


Rotation stop: external

Weight: 3.2/3.1 g, unit: 1000 pcs.

Type: 97705

**Ref. No.: 520733** white

**Ref. No.: 520734** black



Cover caps

Height: 19 mm

Material: PA GF

Moulded thread: M10x1

Rotation stop: external


With locking screw

Weight: 3.6/3.5 g, unit: 1000 pcs.

Type: 85074

**Ref. No.: 520735** white

**Ref. No.: 520736** black



# Lampholders for General-service Incandescent and Retrofit Lamps

Cover caps

Material: PA GF

Round hole:  $\varnothing$  10.5 mm


Rotation stop: internal and external

Weight: 4.3 g, unit: 1000 pcs.

Type: 97666

**Ref. No.: 109119** white

**Ref. No.: 109120** black



1

Cover caps

Material: PA GF

Profiled hole:  $\varnothing$  10.5x8.6 mm


Fixing holes for screws M3

Weight: 4.4/4.3 g, unit: 1000 pcs.

Type: 97635

**Ref. No.: 109122** white

**Ref. No.: 109123** black



2

3

4

Cover cap

Material: PA GF


Profiled hole:  $\varnothing$  10.4 mm

Rotation stop: internal and external

Weight: 4 g, unit: 1000 pcs.

Type: 97697

**Ref. No.: 109126** black



5

6

Cover caps

Height: 19 mm

Material: PA GF

Profiled hole:  $\varnothing$  10.4 mm


Rotation stop: internal and external

Weight: 2.7 g, unit: 1000 pcs.

Type: 97708

**Ref. No.: 520759** white

**Ref. No.: 520760** black



7

8

Cover caps

With peg

With integrated cord grip

For leads H03VH2-F 2X0.75


Material: PA GF

Weight: 4.2/4.3 g, unit: 1000 pcs.

Type: 97000

**Ref. No.: 503457** white

**Ref. No.: 503458** black



9


10

# Lampholders for General-service Incandescent and Retrofit Lamps

## Cover cap

With male nipple: M10x1  
 With rotation stop  
 With integrated cord grip  
 For leads H03VH2-F 2X0.75  
 Material: PA GF, white  
 Weight: 4.1 g, unit: 1000 pcs.  
 Type: 97037



**Ref. No.: 508067**



## Cover cap

External thread 28x2 IEC 60399  
 With integrated cord grip  
 For leads H03VH2-F 2X0.75  
 Material: PA GF, natural  
 Weight: 5.5 g, unit: 1000 pcs.  
 Type: 97427


**Ref. No.: 509340**

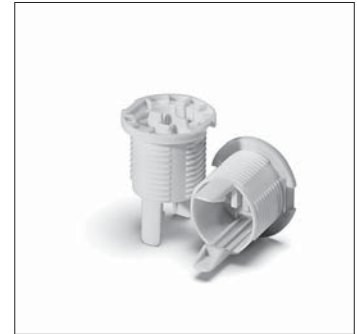

## Cover cap

Lateral push-fit foot for cut-out 10x20 mm  
 For luminaires of protection class II  
 Material: PA GF, white  
 Weight: 4.3 g, unit: 1000 pcs.  
 Type: 97745


**Ref. No.: 546006**



## Cover cap

With central positioning stud  
 Material: PA GF  
 Fixing holes for countersunk screws  $\varnothing$  3 mm  
 Weight: 3 g, unit: 1000 pcs.  
 Type: 91522

**Ref. No.: 535357**





## Table Lamp Set

For E14 lampholders, one-piece

For E14 lampholders type 64001 (s. p. 324)

For glass with hole:  $\varnothing$  40-45 mm

Material: PA



Fixing insert for cover cap 534089

For glass with hole:  $\varnothing$  40-45 mm,  
wall thickness: 3-10 mm

Weight: 6.9 g, unit: 500 pcs.

Type: 97658

**Ref. No.: 534087** natural





Screw ring for fixing insert

External thread 38x2.5

Weight: 3.4 g, unit: 500 pcs.

Type: 97701

**Ref. No.: 534088** natural



Cover cap for E14 lampholders



Suitable for fixing insert 534087

With cord grip for lead H03VH2-F

Weight: 3.4 g, unit: 1000 pcs.

Type: 97692

**Ref. No.: 534089** white



1

2

3

4

5

6

7

8

9

10

## E14 Thermoplastic Lampholders, Three-piece

For incandescent lamps with base E14

Nominal rating: 2/250

Temperature marking: T190

Brass-finished versions are available on request.

Inserts

Material: PET GF, black

Casing lock

Weight: 3.9/3.2 g, unit: 1000 pcs.

Type: 81095 screw terminals: 0.5-2.5 mm<sup>2</sup>

**Ref. No.: 103424**

Type: 81096 push-in twin terminals: 0.5-1.5 mm<sup>2</sup>

**Ref. No.: 107716**



7

8



9

10



# Lampholders for General-service Incandescent and Retrofit Lamps

## Plain casings



Material: PET GF

Weight: 9/8.5 g, unit: 1000 pcs.

Type: 81093

**Ref. No.: 103415** white

**Ref. No.: 103414** black

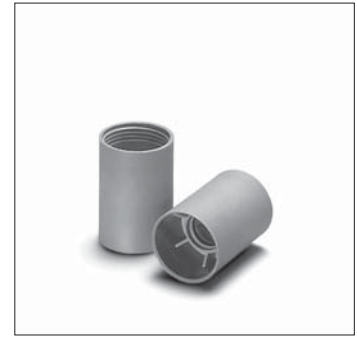

## Threaded casings 28x2 IEC 60399



Material: PET GF

Weight: 9.8/9.6 g, unit: 1000 pcs.

Type: 81109

**Ref. No.: 103431** white

**Ref. No.: 103430** black

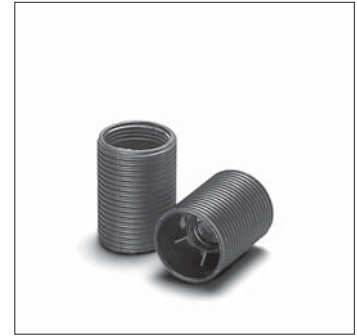

## Threaded casings 28x2 IEC 60399

With flange


Material: PET GF

Weight: 10.6/10.4 g, unit: 1000 pcs.

Type: 81120

**Ref. No.: 103443** white

**Ref. No.: 103442** black



## Caps

Material: PA GF

Female nipple: M10x1


Height: 13.7 mm

Weight: 6.9/7.2 g, unit: 1000 pcs.

Type: 81002

**Ref. No.: 109102** white

**Ref. No.: 109103** black



## Caps

Material: PA GF

Female nipple: M10x1


Height: 18.7 mm

Weight: 7/7.3 g, unit: 1000 pcs.

Type: 81024

**Ref. No.: 109805** white

**Ref. No.: 109145** black




# Lampholders for General-service Incandescent and Retrofit Lamps

## Caps

Material: PA GF  
 Moulded thread: M10x1  
 Rotation stop: external  
 Height: 13.7 mm  
 Weight: 3.3/3.7 g, unit: 1000 pcs.  
 Type: 96159

**Ref. No.: 109095** white  
**Ref. No.: 109084** black




1

2

## Caps

Material: PA GF  
 Moulded thread: M10x1  
 Rotation stop: external  
 Height: 18.7 mm  
 Weight: 3.6/3.9 g, unit: 1000 pcs.  
 Type: 96211

**Ref. No.: 109149** white  
**Ref. No.: 109150** black




3

4

## Caps

Material: PA GF  
 Moulded thread: M10x1  
 Rotation stop: external  
 With locking screw  
 Height: 13.7 mm  
 Weight: 3.7/4 g, unit: 1000 pcs.  
 Type: 81130

**Ref. No.: 109041** white  
**Ref. No.: 109054** black




5

6

## Caps

Material: PA GF  
 Moulded thread: M10x1  
 Rotation stop: external  
 With locking screw  
 Height: 18.7 mm  
 Weight: 3.9/4.3 g, unit: 1000 pcs.  
 Type: 81132

**Ref. No.: 109152** white  
**Ref. No.: 109153** black




7

8

## Caps

Material: PA GF  
 Round hole: Ø 10.5 mm  
 Rotation stop: internal  
 Height: 13.7 mm  
 Weight: 3.3 g, unit: 1000 pcs.  
 Type: 96004

**Ref. No.: 508352** white  
**Ref. No.: 508353** black



9

10

## E14 Metal Lampholders, Three-piece

For incandescent lamps with base E14

Nominal rating: 2/250  
 Temperature marking: T190/T240  
 Type: 513 plain casing  
 Type: 514 threaded casing 28 x 2

Insert

Material: porcelain, white  
 Casing lock  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Weight: 10.3 g, unit: 500 pcs.  
 Type: 83142



**new** Ref. No.: 550375

Plain casings

Material: zinc-coated polished steel  
 Weight: 14.3/14.2/18.3/18.2 g  
 Unit: 500 pcs.  
 Type: 81019 insulating threaded ring: duroplastic, T190


**Ref. No.: 103359** chrome-finish

**Ref. No.: 103360** brass-finish

Type: 81018 insulating threaded ring: steatite, T240

**Ref. No.: 507049** chrome-finish

**Ref. No.: 507050** brass-finish



Threaded casings 28 x 2 IEC 60399

Material: zinc-coated polished steel  
 Weight: 14.4/14.4/18.9/18.9 g  
 Unit: 500 pcs.  
 Type: 81022 insulating threaded ring: duroplastic, T190


**Ref. No.: 103365** chrome-finish

**Ref. No.: 103366** brass-finish

Type: 81017 insulating threaded ring: steatite, T240

**Ref. No.: 507052** chrome-finish

**Ref. No.: 507053** brass-finish



Caps

Material: zinc-coated polished steel  
 Female nipple: M10 x 1  
 Weight: 7.2/7.1/7.9/7.8 g  
 Unit: 500 pcs.

Type: 80006



**Ref. No.: 102946** chrome-finish

**Ref. No.: 102947** brass-finish

Type: 80003 with earth terminal

**Ref. No.: 102938** chrome-finish

**Ref. No.: 102939** brass-finish



## E14 Thermoplastic Rocker Switch Lampholders


For incandescent lamps with base E14

Nominal rating: 2/250  
Temperature marking: T160

Suitable casings see page 330:  
Type: 81093 plain casing  
Type: 81109 threaded casing 28x2  
Type: 81120 threaded casing 28x2, with flange


Inserts with switch  
Material: PET GF  
Screw terminals: 0.5-2.5 mm<sup>2</sup>  
Weight: 7.9 g, unit: 1000 pcs.  
Type: 83141

**Ref. No.: 537087** switch, white  
**Ref. No.: 537088** switch, black




Caps  
Material: PET GF  
Moulded thread: M10x1  
with locking screw  
Weight: 9.9 g, unit: 1000 pcs.  
Type: 81100

**Ref. No.: 537079** white  
**Ref. No.: 537080** black



1

2

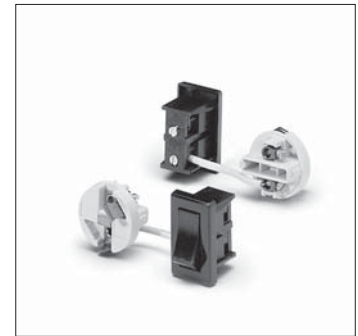

3

4



5

6


7

## E14 Lampholder for Emergency Lighting

For incandescent lamps with base E14

E14 lampholder, nominal rating: 2/250  
For emergency lighting acc. to  
DIN VDE 0711 part 2-22/EN 60598-2-22  
Casing: FS 181 SG, white  
Screw terminals: max. 10 mm<sup>2</sup>  
With cord grip for leads max. Ø 7.5 mm,  
after turn of cord grip for leads max. Ø 12 mm  
"Green dot" sticker enclosed  
Weight: 49 g, unit: 200 pcs.  
Type: 52001

**Ref. No.: 101910**



8

9

10

## E27 Thermoplastic Lampholders, One-piece

**For incandescent lamps with base E27**

E27 lampholders with temperature marking

T180 on request.

Brass-finished versions are available on request.

E27 lampholders, for cover caps

Plain casing

Casing: PET GF, T210

Nominal rating: 4/250

Push-in twin terminals: 0.5–2.5 mm<sup>2</sup>


Fixing holes for screws M4

Weight: 17.4 g, unit: 500 pcs.

Type: 64401

**Ref. No.: 108936** white

**Ref. No.: 500810** black

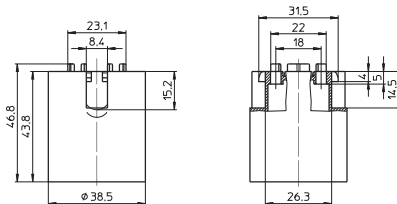

E27 lampholders, for cover caps

External thread 40x2.5 IEC 60399

Casing: PET GF, T210

Nominal rating: 4/250

Push-in twin terminals: 0.5–2.5 mm<sup>2</sup>


Fixing holes for screws M4

Weight: 19.1/18.8 g, unit: 500 pcs.

Type: 64501

**Ref. No.: 108965** white

**Ref. No.: 109429** black

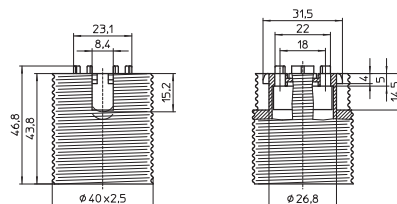

E27 lampholders, for cover caps

External thread 40x2.5 IEC 60399, with flange

Casing: PET GF, T210

Nominal rating: 4/250

Push-in twin terminals: 0.5–2.5 mm<sup>2</sup>


Fixing holes for screws M4

Weight: 21.4 g, unit: 500 pcs.

Type: 64601

**Ref. No.: 501358** white

**Ref. No.: 501356** black

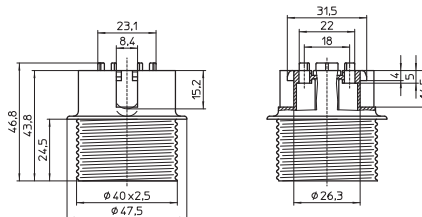

E27 lampholders, for cover caps

Profiled shape, external thread 40x2.5 IEC 60399

Casing: PET GF, T210, nominal rating: 4/250

Push-in twin terminals: 0.5–2.5 mm<sup>2</sup>

Fixing holes for screws M3

Rear fixing holes for self-lapping screws


acc. to ISO 1481/7049-ST3.9-C/F

Weight: 14.8/14.9 g, unit: 500 pcs.

Type: 64719

**Ref. No.: 504303** white

**Ref. No.: 504302** black

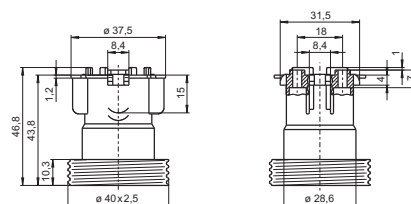

# Lampholders for General-service Incandescent and Retrofit Lamps

E27 lampholders, for cover caps

Profiled shape, external thread 40x2.5 IEC 60399

Casing: PET GF, T210, nominal rating: 4/250

Push-in twin terminals: 0.5 - 2.5 mm<sup>2</sup>

Fixing holes for screws M3

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST3.9-C/F

Weight: 11.4/11.3 g, unit: 500 pcs.

Type: 64775

**Ref. No.: 506255** white

**Ref. No.: 506257** black

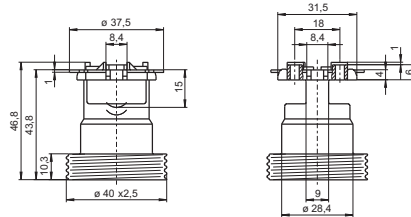

1

2

E27 lampholders

Profiled shape, plain, nominal rating: 4/250

Screw terminals: 0.5 - 2.5 mm<sup>2</sup>

Fixing holes for screws M3

Rear fixing holes for self-tapping screws

acc. to ISO 1481/7049-ST3.9-C/F


Weight: 11.7/11.5/13 g, unit: 500 pcs.

Type: 64785

**Ref. No.: 506263** PET GF, white, T210

**Ref. No.: 506265** PET GF, black, T210

**Ref. No.: 506267** LCP, natural, T270

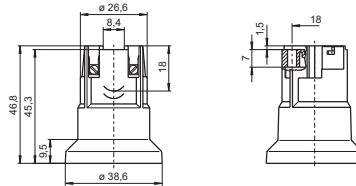

3

4

E27 lampholders

For cover caps type 97545/80023 (see p. 337)

Profiled shape, plain, nominal rating: 4/250

Push-in twin terminals: 0.5 - 2.5 mm<sup>2</sup>

Fixing holes for screws M3

Rear fixing holes for self-tapping screws


acc. to ISO 1481/7049-ST3.9-C/F

Weight: 11.5/14.9 g, unit: 500 pcs.

Type: 64770

**Ref. No.: 108953** PET GF, natural, T210

**Ref. No.: 109838** LCP, natural, T270



5

6

E27 lampholder

For luminaires of protection class II

Profiled shape, plain

Casing: PET GF, white, T210

Nominal rating: 4/250

Screw terminals: 0.5 - 2.5 mm<sup>2</sup>


Lateral fixing hole for screw M4

Tilt of lamp axis: 3°

Weight: 15.2 g, unit: 500 pcs.

Type: 64781

**Ref. No.: 503041**

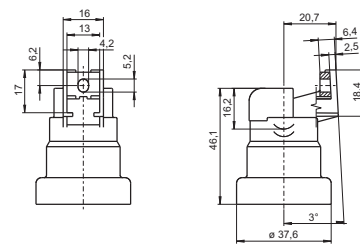

7

8

E27 lampholders

Profiled shape, plain

Casing: PET GF, T210

Nominal rating: 4/250

Push-in twin terminals: 0.5 - 2.5 mm<sup>2</sup>

Lateral fixing hole for screw M4


Tilt of lamp axis: 3°

Weight: 13.3 g, unit: 500 pcs.

Type: 64740

**Ref. No.: 108747** white

**Ref. No.: 529599** natural

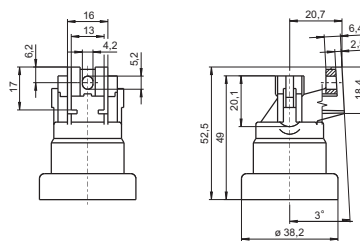


9

10

# Lampholders for General-service Incandescent and Retrofit Lamps

## E27 lampholder


Profiled shape, external thread 40x2.5 IEC 60399  
 Casing: PET GF, natural, T210, nominal rating: 4/250  
 Push-in twin terminals: 0.5–2.5 mm<sup>2</sup>  
 Lateral push-fit foot for cut-out 10x20 mm  
 Fixing clips for wall thickness 0.4–1 mm  
 Tilt of lamp axis: 12°  
 For cover cap 504615 (see below)  
 Weight: 14.7 g, unit: 500 pcs.  
 Type: 64741

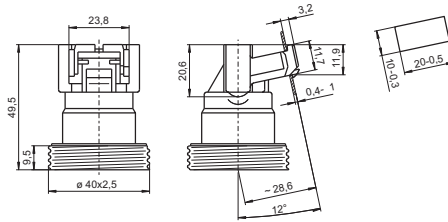


## Cover Caps

### For E27 thermoplastic lampholders, one-piece and for B22d thermoplastic lampholders

Cover cap for lampholder 108758 (see above)  
 For luminaires of protection class II  
 Material: PA GF, white  
 Weight: 2.7 g, unit: 500 pcs.  
 Type: 97321




Protection caps for E27 lampholders with bracket with earth connection 400772 (s. p. 355)  
 For lampholder type 64770/64785 (s. p. 335)  
 For luminaires of protection class II  
 Material: PA GF, natural  
 Weight: 4.8 g, unit: 500 pcs.  
 Type: 97497

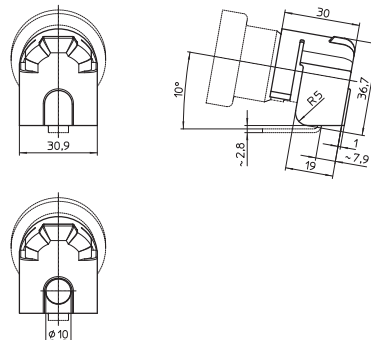

**Ref. No.: 526886**  
 Type: 97498 fixing hole: Ø 10 mm  
**Ref. No.: 529464**

Cover caps  
 Material: PA GF  
 Female nipple: M10x1  
 Weight: 9.6/9.9 g, unit: 500 pcs.  
 Type: 85070  
**Ref. No.: 109077** white  
**Ref. No.: 109092** black





# Lampholders for General-service Incandescent and Retrofit Lamps

Cover caps

Material: PA GF

Moulded thread: M10x1


Cross groove for rotation stop: external

Weight: 4.4/4.6 g, unit: 500 pcs.

Type: 97665

**Ref. No.: 109679** white

**Ref. No.: 109680** black



1

2

Cover caps

Material: PA GF

Moulded thread: M10x1

Cross groove for rotation stop: external


With lateral hole

Weight: 4/4.6 g, unit: 500 pcs.

Type: 97664

**Ref. No.: 109795** white

**Ref. No.: 109794** black



3

4

Cover caps

Material: PA GF

Moulded thread: M10x1

Cross groove for rotation stop: external


With locking screw

Weight: 4.7/4.9 g, unit: 500 pcs.

Type: 85077

**Ref. No.: 400819** white

**Ref. No.: 400820** black



5

6

Cover caps

For E27 lampholders type 64770

Material: PA GF, black

Moulded thread: M10x1

Cross groove for rotation stop: external


Weight: 3.1/3.4 g, unit: 500 pcs.

Type: 97545

**Ref. No.: 532390**

Type: 80023 with locking screw

**Ref. No.: 532391**



7

8

Cover caps

Material: PA GF

Profiled hole: Ø 10.4 mm


Rotation stop: internal and external

Weight: 5.7/5.9 g, unit: 500 pcs.

Type: 97698

**Ref. No.: 109560** white

**Ref. No.: 109184** black

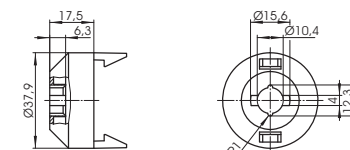

9

10



# Lampholders for General-service Incandescent and Retrofit Lamps

Cover caps

Material: PA GF

Round hole:  $\varnothing$  10.5 mm

Rotation stop: external


Fixing holes for screws M4

Weight: 5.4/5.5 g, unit: 500 pcs.

Type: 97511

**Ref. No.: 109045** white

**Ref. No.: 109062** black

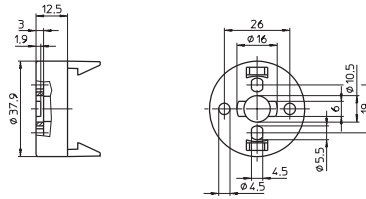

Cover caps

Conical shape

Material: PA GF

Moulded thread: M10x1



Cross groove for rotation stop: external

Weight: 8.9/8.8 g, unit: 500 pcs.

Type: 97260

**Ref. No.: 109555** white

**Ref. No.: 109556** black

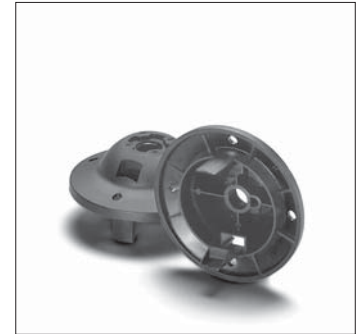

Cover caps

Conical shape

Material: PA GF

With integrated cord grip

For leads H03VV-F 2X0.5 or


H03VV-F 2X0.75

Weight: 10.6/10.5 g, unit: 500 pcs.

Type: 83282

**Ref. No.: 109159** white

**Ref. No.: 109462** black

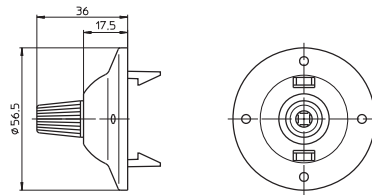

Cover cap for lampholder 102624 (see p. 344)

With cord grip for self-tapping screws

acc. to ISO 1481/7049-ST2.9-C/F

Cord grip for luminaires of protection class II

Material: PA GF, black


Weight: 12.5/2.2 g, unit: 500 pcs.

Type: 96206 cover cap

**Ref. No.: 107178**

Type: 96242 cord grip

**Ref. No.: 107177**

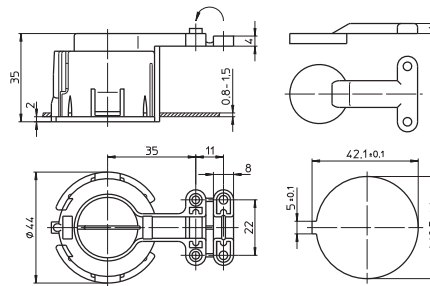

Cover caps

Material: PA GF

With integrated cord grip

For leads H03VV-F 2X0.5 or


H03VV-F 2X0.75

Weight: 6.6/5.8 g, unit: 500 pcs.

Type: 83283

**Ref. No.: 504769** white

**Ref. No.: 507075** black



## Table Lamp Set

### For E27 lampholders, one-piece

For E27 lampholders type 64401 (s. p. 334)

For glass with hole:  $\varnothing$  40–45 mm

Material: PA

Fixing insert for cover cap 534090


For glass with hole:  $\varnothing$  40–45 mm,

wall thickness: 3–10 mm

Weight: 6.9 g, unit: 500 pcs.

Type: 97658

**Ref. No.: 534087** natural

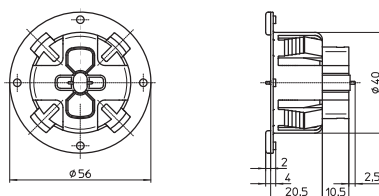


Screw ring for fixing insert

External thread 38x2.5

Weight: 3.4 g, unit: 500 pcs.

Type: 97701

**Ref. No.: 534088** natural



Cover cap for E27 lampholders





Suitable for fixing insert 534087

With cord grip for lead H03VH2-F

Weight: 5.4 g, unit: 500 pcs.

Type: 97700

**Ref. No.: 534090** white



## E27 Renovation Kit Lampholders

### For incandescent lamps with base E27

E27 renovation kit lampholders with suspension

Profiled shaped lampholder 64770 - T180

Cover cap with cord grip 532394

Nominal rating: 4/250

Lead: Cu, stranded conductors 0.75 mm<sup>2</sup>,


double PVC-insulation, length: 150 mm

Weight: 25.8/26.2 g, unit: 150 pcs.

Type: 64770

**Ref. No.: 532399** black, with screw terminal

**Ref. No.: 533991** black, with push-in terminal

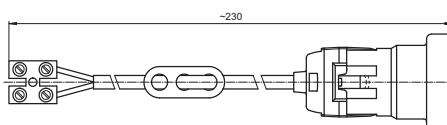

## E27 Thermoplastic Lampholders, Three-piece

For incandescent lamps with base E27

Nominal rating: 4/250

Temperature marking: T190

Brass-finished versions are available on request.

Inserts

Material: PET GF, black

Casing lock

Weight: 5.7/6.1 g, unit: 500 pcs.

Type: 83285 push-in terminals: 0.5-1.5 mm<sup>2</sup>


**Ref. No.: 103643**

Type: 83013 push-in twin terminals: 0.5-2.5 mm<sup>2</sup>

**new** **Ref. No.: 546004**

Type: 83011 screw terminals: 0.5-2.5 mm<sup>2</sup>

**Ref. No.: 103520**



Plain casings


Material: PET GF

Weight: 14.5/14.3 g, unit: 500 pcs.

Type: 83000

**Ref. No.: 103468** white

**Ref. No.: 103467** black



Threaded casings 40x2.5 IEC 60399


Material: PET GF

Weight: 17/16.1 g, unit: 500 pcs.

Type: 83002

**Ref. No.: 103484** white

**Ref. No.: 103483** black



Threaded casings 40x2.5 IEC 60399

With flange


Material: PET GF

Weight: 16.7/17 g, unit: 500 pcs.

Type: 83173

**Ref. No.: 103570** white

**Ref. No.: 103569** black




# Lampholders for General-service Incandescent and Retrofit Lamps

## Caps

Material: PA GF  
 Profiled hole:  $\varnothing 10.5 \times 8.6$  mm  
 Fixing holes for screws M4  
 Height: 13.8 mm  
 Weight: 5.6/6 g, unit: 500 pcs.  
 Type: 96148

**Ref. No.: 109188** white  
**Ref. No.: 109187** black




1

2

## Caps

Material: PA GF  
 Female nipple: M10x1  
 Height: 17 mm  
 Weight: 9.8/10.1 g, unit: 500 pcs.  
 Type: 83007

**Ref. No.: 109052** white  
**Ref. No.: 109039** black




3

4

## Caps with earth terminal

Material: PA GF  
 Female nipple: M10x1  
 Height: 17 mm  
 Weight: 10.7/11 g, unit: 500 pcs.  
 Type: 83035

**Ref. No.: 109098** white  
**Ref. No.: 109099** black




5

6

## Caps

Material: PA GF  
 Moulded thread: M10x1  
 Rotation stop: external  
 Height: 17 mm  
 Weight: 6.7/7 g, unit: 500 pcs.  
 Type: 96147

**Ref. No.: 109195** white  
**Ref. No.: 109196** black




7

8

## Caps

Material: PA GF  
 Moulded thread: M10x1  
 Rotation stop: external  
 With locking screw  
 Height: 17 mm  
 Weight: 7.1/7.3 g, unit: 500 pcs.  
 Type: 83293

**Ref. No.: 109087** white  
**Ref. No.: 109074** black



9

10

# Lampholders for General-service Incandescent and Retrofit Lamps

## Caps

Material: PA GF

Round hole:  $\varnothing$  10.5 mm

Rotation stop: internal and external


Height: 17 mm

Weight: 5.9/6.6 g, unit: 500 pcs.

Type: 96154

**Ref. No.: 109190** white

**Ref. No.: 109191** black



## Caps

Material: PA GF

Profiled hole:  $\varnothing$  10.3 mm

Rotation stop: internal and external


Height: 17 mm

Weight: 5.9/6.6 g, unit: 500 pcs.

Type: 96124

**Ref. No.: 109559** white

**Ref. No.: 109512** black



## Caps

Conical shape

Material: PA GF

Female nipple: M10x1


Height: 19.2 mm

Weight: 14.2/15.2 g, unit: 500 pcs.

Type: 83274

**Ref. No.: 109081** white

**Ref. No.: 109093** black



## Caps

Conical shape

Material: PA GF

Round hole:  $\varnothing$  10.5 mm

Rotation stop: internal


Height: 19.2 mm

Weight: 10.4/10.6 g, unit: 500 pcs.

Type: 96172

**Ref. No.: 109060** white

**Ref. No.: 109044** black



## E27 Porcelain Lampholders

For incandescent lamps with base E27

E27 lampholders, one-piece  
 Material: porcelain, white, T270  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Fixing oblong holes for screws M4  
 Weight: 60.6 g, unit: 250 pcs.  
 Type: 62050


**Ref. No.: 102599**

Type: 62010 with lamp safety catch (with spring)

**Ref. No.: 102577**


Type: 62009 with lamp safety catch (with crushing)

**Ref. No.: 544605**

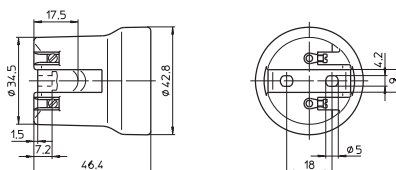


E27 lampholder, one-piece  
 Material: porcelain, white, T270  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Fixing pillars for screws M3  
 Weight: 66.3 g, unit: 250 pcs.  
 Type: 62015

**Ref. No.: 102582**

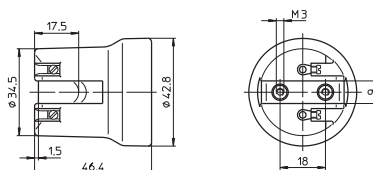


E27 lampholder, one-piece  
 Material: porcelain, white, T270  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Fixing oblong holes for screws M4  
 Weight: 60.5 g, unit: 200 pcs.  
 Type: 62070

**Ref. No.: 543304**

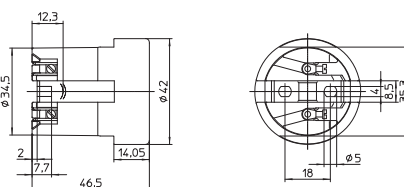

E27 lampholder, one-piece  
 Material: porcelain, white, T270  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 With lateral fixing flange,  
 tilt angle: 15°  
 Spring loaded central contact  
 Fixing hole for screw M4  
 Weight: 67.6 g, unit: 200 pcs.  
 Type: 62415

**Ref. No.: 543414**



1

2

3

4

5

6

7

8

9


10

# Lampholders for General-service Incandescent and Retrofit Lamps

E27 lampholder, one-piece, for cover caps (see p. 336-338)

Material: porcelain, white, T270  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Fixing oblong holes for screws M4  
 Weight: 66.5 g, unit: 250 pcs.  
 Type: 62310

**Ref. No.: 102624**

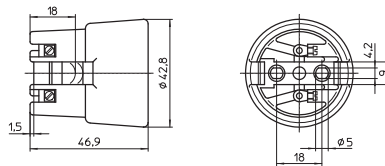


E27 lampholder

For cover caps type 80010, 97735 and 97742 (see below)

Material: porcelain, white, T270  
 Nominal rating: 4/250/5 kV  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact  
 Fixing holes for screw M4  
 Weight: 66.5 g, unit: 250 pcs.  
 Type: 62370

**Ref. No.: 543303**

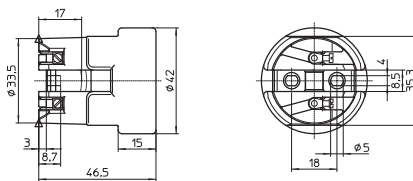

Cover caps for lampholder 543303

Material: PA GF  
 Weight: 12.5/12.5/10/10 g, unit: 500 pcs.  
 Type: 97735 moulded thread: M10x1, without locking screw

**Ref. No.: 536445** black


**Ref. No.: 536446** white

Type: 97742 moulded thread: M10x1, with lateral hole, without locking screw

**Ref. No.: 535247** black

Type: 80010 female nipple: G3/8A

**Ref. No.: 535694** white

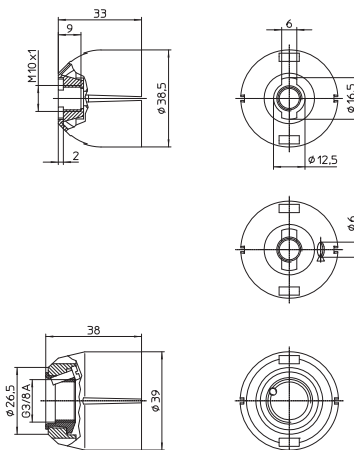

E27 lampholder, three-piece

Material: porcelain, white, T240, nominal rating: 4/250, screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Weight: 116/125/116/125/121.7/130.7 g  
 Unit: 25 pcs.

Type: 62061 female nipple: M10x1

**Ref. No.: 535684**

**Ref. No.: 535685** with earth screw

Type: 62062 female nipple: M13x1


**Ref. No.: 536451**

**Ref. No.: 536452** with earth screw

Type: 62063 female nipple: G3/8A

**Ref. No.: 534832**

**Ref. No.: 534833** with earth screw

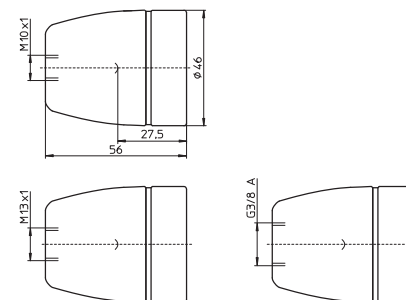



## E27 Metal Lampholders, Three-piece

**For incandescent lamps with base E27**

Nominal rating: 4/250  
 Type: 670 plain casing  
 Type: 671 threaded casing 40x2.5  
 Temperature marking: T240

### Inserts

Material: porcelain, white  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Spring loaded central contact, casing lock  
 Weight: 22.8/23.3 g, unit: 500 pcs.  
 Type: 83221

**Ref. No.: 103595**

Type: 83223 with earth terminal

**Ref. No.: 103597**



### Plain casings

Material: zinc-coated polished steel  
 Weight: 23.5/22.9/27.1/27.1 g  
 Unit: 500 pcs.  
 Type: 83218 insulating threaded ring: PPS


**Ref. No.: 103582** chrome-finish

**Ref. No.: 103583** brass-finish

Type: 83226 insulating threaded ring: steatite

**Ref. No.: 504640** chrome-finish

**Ref. No.: 504641** brass-finish



### Threaded casings 40x2.5 IEC 60399

Material: zinc-coated polished steel  
 Weight: 24/23.1/27.3/27.6 g  
 Unit: 500 pcs.  
 Type: 83219 insulating threaded ring: PPS


**Ref. No.: 103590** chrome-finish

**Ref. No.: 103591** brass-finish

Type: 83227 insulating threaded ring: steatite

**Ref. No.: 504643** chrome-finish

**Ref. No.: 504644** brass-finish



### Caps

Material: zinc-coated polished steel  
 Female nipple: M10x1  
 Weight: 10.6/10.8/11.4/11.3 g  
 Unit: 500 pcs.

Type: 80342



**Ref. No.: 103020** chrome-finish

**Ref. No.: 103021** brass-finish

Type: 80343 with earth terminal

**Ref. No.: 103026** chrome-finish

**Ref. No.: 103027** brass-finish



1

2



3

4



5

6



7

8



9

10



## E27 Thermoplastic Pull-switch Lampholders

### For incandescent lamps with base E27

Nominal rating: 2/250

Type: 65300 plain casing, with pull cord

Type: 65308 plain casing, with draw chain

Type: 65400 threaded casing 40x2.5, with pull cord

Type: 65408 threaded casing 40x2.5, with draw chain

Insert with pull cord

Material: PET GF, black

Screw terminals: 0.5-2.5 mm<sup>2</sup>

Length of cord: 250 mm

Weight: 12.3 g, unit: 500 pcs.

Type: 83146


**Ref. No.: 507802**

End button for pull cord, material: PS, white

Weight: 0.8 g, unit: 500 pcs.

Type: 96010

**Ref. No.: 105144**



Insert for brass chain

Material: PET GF, black

Screw terminals: 0.5-2.5 mm<sup>2</sup>

Weight: 11.7 g, unit: 500 pcs.

Type: 83147

**Ref. No.: 507803**


Draw chain with end button

Material: brass, length of chain: 85 mm

Weight: 3.9 g, unit: 500 pcs.

Type: 94304

**Ref. No.: 104928**



Plain casings


Material: PET GF

Weight: 11.7 g, unit: 500 pcs.

Type: 96033

**Ref. No.: 105179** white

**Ref. No.: 109280** black



Threaded casings 40x2.5 IEC 60399


Material: PET GF

Weight: 9.3 g, unit: 500 pcs.

Type: 96034

**Ref. No.: 105185** white

**Ref. No.: 109281** black




# Lampholders for General-service Incandescent and Retrofit Lamps

## Caps

Material: PET GF  
 Female nipple: M10x1  
 Weight: 19.8/19.4 g, unit: 500 pcs.  
 Type: 83258

**Ref. No.: 109282** white  
**Ref. No.: 109283** black




1

2

## Flange rings

For pull-switch lampholders type 654  
 Material: PA GF  
 Ø 60 mm, height: 6.5 mm  
 Weight: 3/3.1 g, unit: 500 pcs.  
 Type: 08400

**Ref. No.: 501351** white  
**Ref. No.: 501352** black



3

4

## E27 Metal Pull-switch Lampholders


**For incandescent lamps with base E27**

Nominal rating: 2/250  
 Type: 55204 plain casing, with pull cord  
 Type: 55203 plain casing, with draw chain  
 Type: 55304 threaded casing 40x2.5, with pull cord  
 Type: 55303 threaded casing 40x2.5, with draw chain

### Insert with pull cord

Material: porcelain, white  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Length of cord: 250 mm, casing lock  
 Weight: 28 g, unit: 500 pcs.  
 Type: 83006

**Ref. No.: 103504**  
 End button for pull cord, material: PS, white  
 Weight: 0.8 g, unit: 500 pcs.  
 Type: 96010  
**Ref. No.: 105144**




5

6

### Insert for brass chain

Material: porcelain, white  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Weight: 29.4 g, unit: 500 pcs.  
 Type: 83008

**Ref. No.: 103515**  
 Draw chain with end button  
 Material: brass, length of chain: 85 mm  
 Weight: 3.9 g, unit: 500 pcs.  
 Type: 94304  
**Ref. No.: 104928**



7

8



9

10

# Lampholders for General-service Incandescent and Retrofit Lamps


## Casings

Material: brass, passivated  
 Insulating threaded ring: PPS  
 Weight: 21.5/22.7 g, unit: 500 pcs.  
 Type: 83218 plain casing

**Ref. No.: 103587**

Type: 83219 threaded casing 40x2.5


**Ref. No.: 103594**



## Cap with earth terminal

Material: brass, passivated  
 Female nipple: M10x1  
 With insulating insert  
 Weight: 20 g, unit: 500 pcs.  
 Type: 80014

**Ref. No.: 102956**



## E27 Thermoplastic Rocker Switch Lampholders

### For incandescent lamps with base E27


Nominal rating: 2/250  
 Temperature marking: T180  
 Suitable casings see page 340:  
 Type: 83000 plain casing  
 Type: 83002 threaded casing 40x2.5  
 Type: 83173 threaded casing 40x2.5, with flange

### Inserts with switch

Material: PET GF, white  
 Screw terminals: 0.5-2.5 mm<sup>2</sup>  
 Weight: 11/11.1 g, unit: 500 pcs.  
 Type: 83015

**Ref. No.: 107331** switch, white

**Ref. No.: 107096** switch, black




## Caps

Material: PA GF  
 Female nipple: M10x1  
 Weight: 14.2/14.7 g, unit: 500 pcs.  
 Type: 83260

**Ref. No.: 109198** white

**Ref. No.: 109199** black



Caps

Material: PA GF

Profiled hole:  $\varnothing$  10.4 mm


Rotation stop: internal and external

Weight: 8.2/10.4 g, unit: 500 pcs.

Type: 96229

**Ref. No.: 109200** white

**Ref. No.: 109201** black



1

2

3

4

## E27 Thermoplastic Rotary Switch Lampholders

**For incandescent lamps with base E27**

Nominal rating: 2/250

Temperature marking: T180

Suitable casings see page 340:

Type: 83000 plain casing

Type: 83002 threaded casing 40x2.5

Type: 83173 threaded casing 40x2.5, with flange

Insert with rotary switch


Material: PET GF, white

Screw terminals: 0.5-2.5 mm<sup>2</sup>

Weight: 19.2 g, unit: 500 pcs.

Type: 83001

**Ref. No.: 506943**



5

6



7

8

Caps for E27 rotary switch lampholder

Material: PA GF


Female nipple: M10x1

Weight: 14.7/15.1 g, unit: 500 pcs.

Type: 83005

**Ref. No.: 507177** white

**Ref. No.: 507178** black



9

10

## E27 Festoon Lampholders

### For lighting chains of protection class II

Degree of protection: IP44

Type: 64710/11

The lampholders may only be operated with the lamp pointing downwards and with a gasket.

E27 festoon lampholder

For lamps max. 40 W

Material: PBT GF, black

Nominal rating: 4/250

Blade contacts


for festoon lead H05RN H2-F 2X1.5

To be used only with protection cap

Weight: 13.8 g, unit: 500 pcs.

Type: 83297

**Ref. No.: 109158**



Protection cap

For E27 festoon lampholders


Material: PA GF, black

With ready-fitted stainless screws

Weight: 6.3 g, unit: 500 pcs.

Type: 83300 with non-removable screws

**Ref. No.: 109243**



Protection cap

For E27 festoon lampholders

Material: PA GF, black


With ready-fitted stainless screws

Fixing holes for screws M4

Weight: 7.2 g, unit: 500 pcs.

Type: 83301 with non-removable screws

**Ref. No.: 502515**



Gasket


For E27 festoon lampholders

Material: silicone

Weight: 4 g, unit: 500 pcs.

Type: 98006

**Ref. No.: 106817**



## B22d Lampholders, Accessories

For mains voltage halogen incandescent lamps

B22d lampholders

For cover caps (see p. 336-338)

Nominal rating: 2/250

Push-in twin terminals: 0.5-1.5 mm<sup>2</sup>


Fixing holes for self-tapping screws acc. to ISO 1481/7049-ST3.9-C/F

Weight: 12.7/12.3 g, unit: 500 pcs.

Type: 64800

**Ref. No.: 108748** PET GF, T180, white

**Ref. No.: 544621** PET GF, T210, white

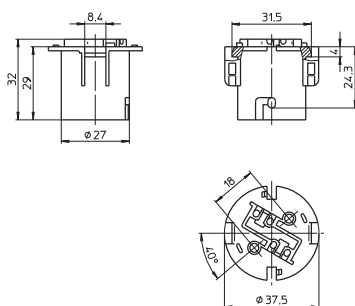

Plain casing

For B22d lampholders type 64800

For cover caps (see p. 336-338)


Threaded casing on request

Material: PA GF, white

Weight: 14.5 g, unit: 500 pcs.

Type: 96021

**Ref. No.: 504749**



B22d lampholder

With protection flange

For cover caps type 80010, 97735 and 97742 (see below)

Casing: porcelain, white, T240

Nominal rating: 2/250


Screw terminals: 0.5-2.5 mm<sup>2</sup>

Fixing holes for screws M3

Weight: 84.7 g, unit: 150 pcs.

Type: 64900

**Ref. No.: 535673**

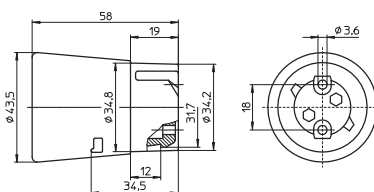

B22d lampholder

Casing: porcelain, white, T240

Nominal rating: 2/250

Screw terminals: 0.5-2.5 mm<sup>2</sup>

Lateral fixing bracket


Tilt angle: 15°

Fixing hole for screws M4

Weight: 70 g, unit: 150 pcs.

Type: 64940

**Ref. No.: 535674**



# Lampholders for General-service Incandescent and Retrofit Lamps

Cover caps for lampholder 535673

Material: PA GF

Weight: 12.5/12.5/10/10 g, unit: 500 pcs.

Type: 97735 moulded thread: M10x1, without locking screw

**Ref. No.: 536445** black


**Ref. No.: 536446** white

Type: 97742 moulded thread: M10x1, with lateral hole, without locking screw

**Ref. No.: 535247** black

Type: 80010 female nipple: G3/8A

**Ref. No.: 535694** white

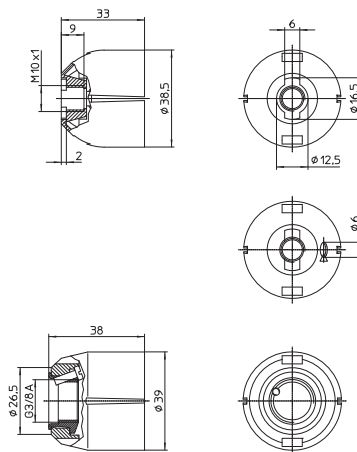

## Accessories

### For E14, E27 lampholders, one-piece and three-piece and B22d lampholders

The luminaire manufacturer is responsible for the right choice of accessories.

Brass-finished versions are available on request.

Plastic screw rings

For E14 lampholders

with external thread 28x2 IEC 60399

Weight: 3.6/3.2/1.8/1.6 g, unit: 1000 pcs.

Type: 03210 Ø 43 mm, height: 15 mm


**Ref. No.: 100125** PET GF, white

**Ref. No.: 109162** PA GF, black

Type: 05202 Ø 34 mm, height: 7.5 mm

**Ref. No.: 107154** PET GF, white

**Ref. No.: 109166** PA GF, black



Metal screw ring

For E14 lampholders

with external thread 28x2 IEC 60399



Material: zinc-coated polished steel, chrome-finish

Ø 40 mm, height: 12 mm

Weight: 4.3 g, unit: 500 pcs.


Type: 06700

**Ref. No.: 100194**

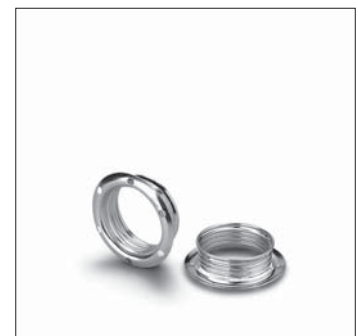

# Lampholders for General-service Incandescent and Retrofit Lamps


Metal screw ring with flange  
 For E14 lampholders  
 with external thread 28x2 IEC 60399  
 Material: zinc-coated polished steel, chrome-finish  
 Imprinted: max. 40 W  
 With leaf springs  
 For glass with hole: Ø 34-42 mm  
 Weight: 11 g, unit: 500 pcs.  
 Type: 17400  
**Ref. No.: 100417**



1

2


Metal screw ring with flange  
 For E14 lampholders  
 with external thread 28x2 IEC 60399  
 Material: zinc-coated polished steel, chrome-finish  
 With basket springs  
 For glass with hole: Ø 38-41 mm  
 Weight: 12.3 g, unit: 500 pcs.  
 Type: 17803  
**Ref. No.: 108847**



3

4



Front gasket  
 For E14 lampholders type 64305, 64306, 64308, 64313, 64316, 64360, 64380 and 64381  
 As lamp safety catch and for protection against moisture acc. to IEC 60079-15  
 Material: elastomer  
 Weight: 1.1 g, unit: 2000 pcs.  
 Type: 98013  
**Ref. No.: 534689**



5

6



Plastic screw rings  
 For E27 and B22d lampholders  
 Weight: 4.9/4.4/3.3/3 g, unit: 500 pcs.  
 Type: 08610 Ø 55 mm, height: 15 mm  
**Ref. No.: 100270** PET GF, white  
**Ref. No.: 109285** PA GF, black  
 Type: 08701 Ø 47.8 mm, height: 9 mm  
**Ref. No.: 100273** PET GF, white  
**Ref. No.: 109291** PA GF, black



7

8

Metal screw ring  
 For E27 and B22d lampholders  
 Material: zinc-coated polished steel, chrome-finish  
 Ø 56.5 mm, height: 13 mm  
 Weight: 7 g, unit: 500 pcs.  
 Type: 07400  
**Ref. No.: 100217**



9

10



# Lampholders for General-service Incandescent and Retrofit Lamps

Brackets for E14 lampholders

For fastening with nipples 109249, 109247

Material: zinc-coated polished steel

Fixing holes for screws M3

Weight: 5.5/5.3/5.3 g, unit: 1000 pcs.

Type: 94068 internal bracket 90°


**Ref. No.: 106767**

Type: 94066 external bracket 90°

**Ref. No.: 400671**

Type: 94069 internal bracket 110°

**Ref. No.: 106768**

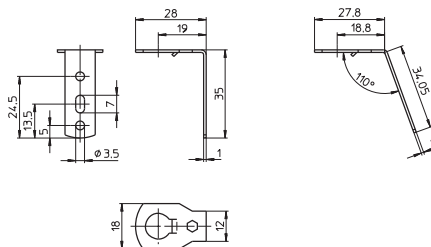

Bracket 90° for E14 lampholders

For fastening with nipples 109249, 109247

Material: zinc-coated polished steel

Fixing holes for screws M3

Weight: 6.2/8.5/8.5 g, unit: 1000 pcs.

Type: 94074 external bracket 18.5x33 mm



**Ref. No.: 106802** holes diagonal

Type: 94067 external bracket 24x41.5 mm

**Ref. No.: 106766** holes vertical

Type: 94079 internal bracket 24x41.5 mm

**Ref. No.: 506211** holes vertical

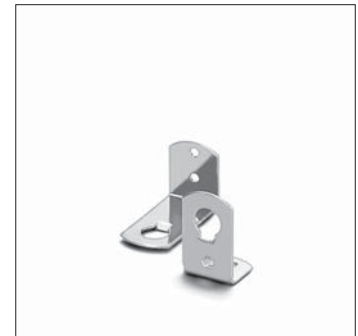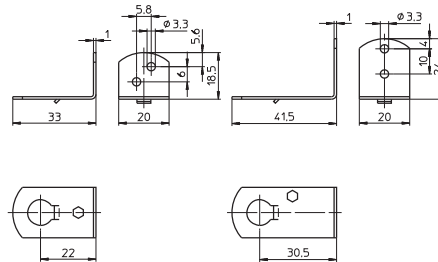

U-shaped clips

For E27 lampholders, one-piece

Material: zinc-coated polished steel, chrome-finish

For wall thickness: 0.5-2 mm


Weight: 3.7/4.3 g, unit: 2500 pcs.

Type: 94435

**Ref. No.: 109621**

Type: 80433 with earth terminal

**Ref. No.: 103087**

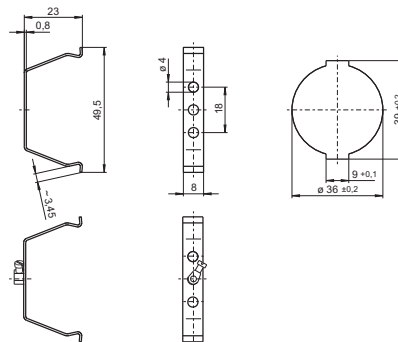

Base clips

For E14 and E27 lampholders, one-piece

Material: zinc-coated polished steel, chrome-finish

For wall thickness: 0.8-1.5 mm

Weight: 3.3/4 g, unit: 2500 pcs.


Type: 94436

**Ref. No.: 109622**

Type: 80474 with earth terminal

(without drawing)

**Ref. No.: 400699**

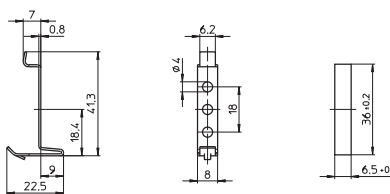

Brackets: 90°, 12.5x47.1 mm

For E14 and E27 lampholders, one-piece

Material: zinc-coated polished steel, chrome-finish

Fixing hole for screw M5


Weight: 5.6/4.8 g, unit: 500 pcs.

Type: 80475 with earth terminal

**Ref. No.: 400779**


Type: 94444

**Ref. No.: 401536**



# Lampholders for General-service Incandescent and Retrofit Lamps


Brackets: 100°, 22.9x36.6 mm  
 For E14 and E27 lampholders, one-piece  
 Material: zinc-coated polished steel, chrome-finish  
 Fixing holes for self-tapping screws  
 acc. to ISO 1481/7049-ST2.9-C/F  
 Tapped hole M4  
 Weight: 5.5/4.6 g, unit: 1000 pcs.  
 Type: 80476 with earth terminal  
**Ref. No.: 400772**  
 Type: 94438  
**Ref. No.: 401549**



1

2


Fixing bracket  
 For E14 and E27 lampholders, one-piece  
 Material: zinc-coated polished steel, chrome-finish  
 With slots for screws M4  
 Weight: 4.6 g, unit: 1000 pcs.  
 Type: 94450  
**Ref. No.: 106829**



3

4


Fixing bracket: 90°, 21x40 mm  
 For E14 and E27 lampholders, one-piece  
 Material: zinc-coated polished steel, chrome-finish  
 Fixing holes for screws M3  
 Weight: 5.2 g, unit: 1000 pcs.  
 Type: 94448  
**Ref. No.: 537628**



5

6



Fixing bracket: 8°  
 For E27 thermoplastic lampholders  
 type 64719 (see p. 334) and for B22d  
 thermoplastic lampholders type 648 (see p. 351)  
 For clicking-on onto the lampholder  
 Material: PA, white  
 Oblong hole for screw M4  
 Weight: 1.9 g, unit: 500 pcs.  
 Type: 97194  
**Ref. No.: 108956**



7

8

Fixing brackets: 8°, 14.5x39 mm  
 For E27 thermoplastic lampholders, one-piece  
 Material: PET GF, white  
 With cable holder  
 Oblong hole for screw M4  
 Weight: 3/3.6 g, unit: 1000 pcs.  
 Type: 97750 fixing holes: Ø 4 mm  
**Ref. No.: 109725**  
 Type: 97752 fixing holes for self-tapping  
 screws acc. to ISO 1481/7049-ST3.9-C/F  
**Ref. No.: 109728**

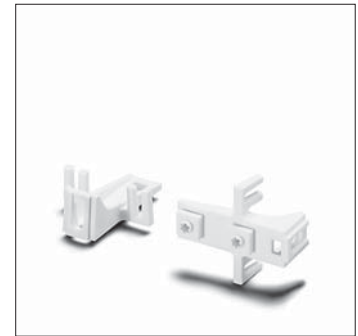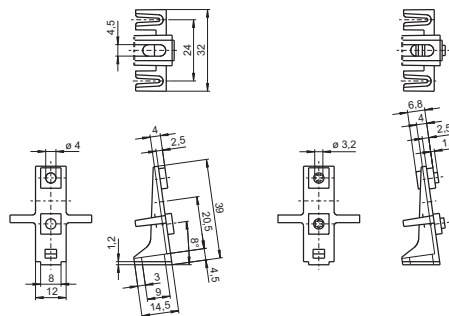

9

10

# Lampholders for General-service Incandescent and Retrofit Lamps

Fixing brackets: 8°, 14.4x39 mm

For E27 thermoplastic lampholders, one-piece

Material: PET GF, white

Oblong hole for screw M4

Weight: 1.9/4.3 g, unit: 1000 pcs.


Type: 97159 fixing holes: Ø 4 mm

**Ref. No.: 108304**

Type: 97755 fixing holes for self-tapping

screws acc. to ISO 1481/7049-ST3.9-C/F

**Ref. No.: 400732**

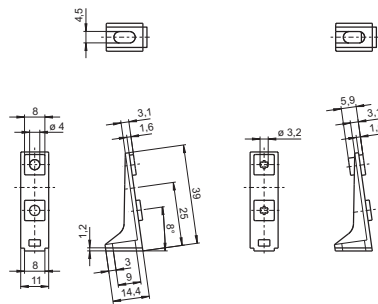

Fixing bracket: 8°, 20x44.4 mm

For E27 thermoplastic lampholders, one-piece

Material: PET GF, white

Fixing holes: Ø 4 mm



With cable holder

Oblong hole for screw M4

Weight: 3.7 g, unit: 1000 pcs.

Type: 97754

**Ref. No.: 401970**

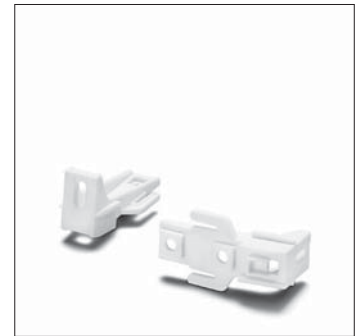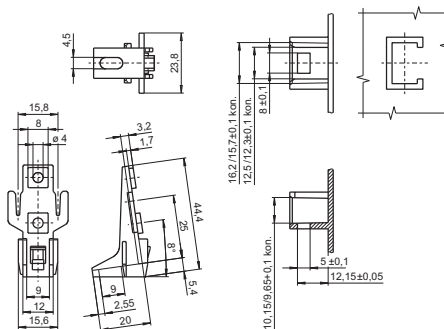

Nipples

For E14 cover caps with moulded thread: M10x1

Cross groove for rotation stop: external

For E27 caps (see p. 341 -342), for fastening of brackets 106766 and 106802 (see p. 354)

Material: PA, white

Male nipple: M10x1, with hexagon flange


Weight: 0.5 g, unit: 1000 pcs.

Type: 09700/09703/09708

**Ref. No.: 538089** length: 15 mm

**Ref. No.: 109249** length: 10 mm

**Ref. No.: 109247** length: 7 mm



Locking nut for thread M10x1

Material: PA GF

Weight: 0.9 g, unit: 1000 pcs.

Type: 97267

**Ref. No.: 507797** white

**Ref. No.: 507798** black



Cord grip with insulating socket

For E14 and E27 lampholders

Material: PA, natural


For luminaires of protection class II

For leads H03VVH2-F 2X0.75

Weight: 0.6 g, unit: 1000 pcs.

Type: 97632

**Ref. No.: 534097**



# Lampholders for General-service Incandescent and Retrofit Lamps

## Cable grips

For leads: H03VV-F

Material: PA

Male nipple: M10x1, length: 10 mm


With locking screw

Weight: 0.6 g, unit: 1000 pcs.

Type: 09701

**Ref. No.: 543640** white

**Ref. No.: 543641** black



1

2

## Cable grips

For leads H03VV-F and H03VVH2-F 2X0.5 or 2X0.75

Material: PA

Male nipple: M10x1, length: 11 mm


With locking screw

Weight: 1.6/1.5 g, unit: 1000 pcs.

Type: 09701

**Ref. No.: 109248** white

**Ref. No.: 109253** black



3

4

## Cord grip

For E14 lampholders, three-piece, with cap height: 19 mm

For leads H03VVH2-F

Material: PA, transparent

Weight: 0.6 g, unit: 1000 pcs.

Type: 09501

**Ref. No.: 106948**



5

6

## Cord grip

For E27 lampholders, three-piece (without switch)

For leads H03VVH2-F

Weight: 0.9 g, unit: 1000 pcs.

Type: 09502

**Ref. No.: 106949** PA, transparent


Insulating socket

Material: PA, transparent

Weight: 0.5 g, unit: 1000 pcs.

Type: 09705

**Ref. No.: 109592**



7

8

## Cord grips

For leads H03VV-F 2X0.5 or

H03VV-F 2X0.75

Material: PA

Weight: 0.9/0.8/1.7/1.6 g, unit: 1000 pcs.

Type: 09606 cord grips

**Ref. No.: 506026** white

**Ref. No.: 506027** black

Type: 96160 screw caps

**Ref. No.: 109318** white

**Ref. No.: 109317** black



9

10

# Lampholders for General-service Incandescent and Retrofit Lamps

## Cord grips

For leads H03VV-F 2X0.5 or

H03VV-F 2X0.75

Material: PA, male nipple: M10x1

Weight: 1/0.9/1.7/1.6 g, unit: 1000 pcs.

Type: 09607 cord grips



**Ref. No.: 506024** white

**Ref. No.: 506020** black

Type: 96160 screw caps

**Ref. No.: 109318** white

**Ref. No.: 109317** black

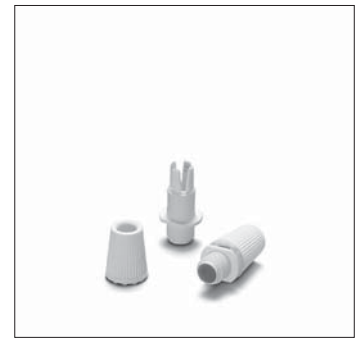


## Insulating socket for E14 lampholders

Material: PA, transparent

Weight: 1 g, unit: 1000 pcs.

Type: 09704

**Ref. No.: 109600**



# E40 Porcelain Lampholders

## For incandescent lamps with base E40

Nominal rating: 18/500/5 kV

Screw terminals: 1.5-4 mm<sup>2</sup>

Spring loaded central contact

### E40 lampholders

Material: porcelain, white, T270

Oblong holes for screws M5

Weight: 224/229.3/224/229.3 g

Unit: 48 pcs.

Type: 12800/12801


**Ref. No.: 108208**

**Ref. No.: 107780** with lamp safety catch

With steel thread

**Ref. No.: 532602**

**Ref. No.: 532603** with lamp safety catch

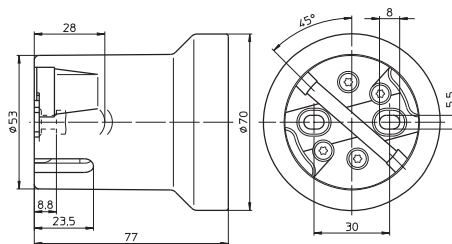

### E40 lampholders

Material: porcelain, white, T270

Fixing bracket with slots for screws M5

Weight: 252.3/243/252.3/243 g

Unit: 48 pcs.

Type: 12810/12811


**Ref. No.: 108374**

**Ref. No.: 108375** with lamp safety catch

With steel thread

**Ref. No.: 532604**

**Ref. No.: 532605** with lamp safety catch

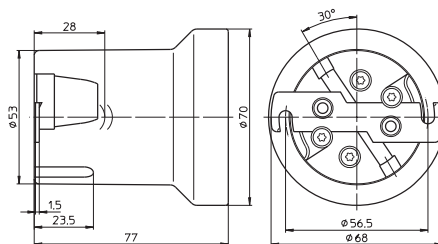

# Lampholders for General-service Incandescent and Retrofit Lamps

E40 lampholders

Material: porcelain, white, T270

Fixing bracket with tapped holes for screws M5

With lamp safety catch



Weight: 252.8 g, unit: 48 pcs.

Type: 12812

**Ref. No.: 108373**

With steel thread

**Ref. No.: 532606**

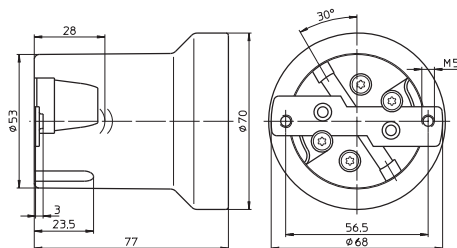

1

2

3

4

5

6

7

8

9

10

5

Components for Incandescent and Retrofit Lamps

Transformers and converters for low-voltage halogen lamps	361
Dimmability of VS transformers and VS converters	362
<b>Electronic converters</b>	<b>362-367</b>
Assembly instructions - Electronic converters	363-367
<b>Electromagnetic transformers</b>	<b>368-372</b>
Assembly instructions - Electromagnetic transformers	369-371
Conductors for low-voltage halogen installations	371-372
<b>Lampholders for incandescent lamps</b>	<b>372-373</b>
<b>General technical details</b>	<b>394-401</b>
Glossary	402-404

## Transformers and converters for low-voltage halogen lamps

Operating low-voltage halogen lamps depends on operating devices that transform the usual mains voltage of 230 V to under 24 V. Safety transformers, of either electromagnetic or electronic (converter) design, have been in almost exclusive use for several years now. The type plate of electromagnetic transformers bears the symbol for safety transformers in accordance with VDE 0570, corresponding to EN 61558. Electronic converters are marked with the sign for Safety Extra-Low Voltage (SELV), which indicates that the product is an isolating converter whose secondary output is safe to touch even during no-load operation.

All Vossloh-Schwabe transformers are safety transformers, i.e. isolation transformers for supplying SELV (safety extra-low voltage) and PELV (protection extra-low voltage) circuits. With such systems, the voltage must not exceed a value of 50 V AC or 120 V DC (smoothed) between the conductors or a conductor and the earth conductor of a circuit that is separated from the mains by a safety transformer. The specified values apply for protected (non-touchable) voltages; 25 V AC and 60 V DC (smoothed) apply for exposed (touchable) voltages.

Depending on their design features to protect against touchable live parts, transformers and converters fall into one of two protection classes. Operating devices of protection class I are base-insulated and have a protective earth conductor connection terminal that must be connected to the protective earth conductor for safety reasons. Isolating transformers and converters of protection class II are equipped with double or reinforced insulation that protects against dangerous casing currents; these operating devices are solely available as independent operating devices (also see page 399; Protection Classes of Luminaires and Operating Devices).

Electronic converters can also be fitted with a functional earth terminal that must be connected to a functional earth to ensure compliance with EMC requirements. In addition, some electronic converters are designed in such a way that neither a protective earth conductor nor a functional earth needs to be connected.

Operating devices can also be differentiated according to the way they are used. Built-in transformers have to be installed in a permanent casing, e.g. a luminaire. In contrast, so-called independent transformers and converters can be operated independently of a luminaire. These are often found in ceiling installations; in order to prevent possible noise development, isolation transformers must be mounted in such a way as to avoid vibration transmission.

Transformers or converters bearing the MM mark can be mounted on surfaces of unknown flammability, which can be the case when mounting these devices on wooden furniture elements. Such devices comply with the temperature requirements of VDE 0710, part 14, of < 95 °C during normal and < 115 °C during abnormal operation.

Converters are labelled with a  $t_c$  point. The stipulated temperature (e.g. 75 °C) must not be exceeded when installed so that the service life of the converter is not shortened. The temperature quoted in the triangle (e.g. 110) denotes that the surface of the converter must never (even in the event of a defect) exceed this temperature.

### Protection symbols



Safety transformer

### SELV

Safety Extra Low Voltage



Protection class II



Independent operating device



Furniture installation  
Normal operation < 95 °C  
Abnormal operation < 115 °C

If the maximum value of 130 °C is not exceeded, the luminaire does not have to be tested in accordance with  $\nabla$  conditions.



$t_c = 75 \text{ °C}$   
Measuring point for maximum permissible casing temperature



Temperature-protected converter  
(in this case < 110 °C)

1

2

3

4

5

6

7

8

9

10



## Dimmability of VS transformers and VS converters

Electromagnetic VS transformers can be controlled using phase-cutting leading-edge dimmers. These dimmers "cut" the sinusoidal mains voltage in the negative and positive half wave at an angle in the ascending portion of this sinusoidal half wave. The higher the angle is set at the dimmer controls, the lower the effective value of the voltage and hence the lamp's output.

Electronic VS converters can be controlled using phase-cutting trailing-edge dimmers. In this case, a semiconductor ensures the predefined descending portion of the sinusoidal half wave is clipped, i.e. the voltage is reduced in reverse mode. Again, higher the angle is set at the dimmer controls, the lower the effective value of the voltage and hence the lamp's output.

Converters of the LiteLine (EST 70/12.380, EST 105/12.381, EST 150/12.622 and EST 60/12.635) and TopLine (EST 70/12.643, EST 105/12.644, EST 150/12.645 and EST 200/12.649) families can be operated using conventional phase-cutting trailing-edge and phase-cutting leading-edge dimmers.

Furthermore, TwinLine converters feature a separate potentiometer connection for direct regulation of lamp voltage and thus of its brightness.

VS DALI converters (Digital Addressable Lighting Interface) can be controlled via the DALI interface; dimmer operation (whether phase-cutting leading- or trailing-edge) is not possible.

## Electronic Converters

The safe operation of electronic converters is dependent on the maximum permissible temperature not being exceeded at the measuring point. Vossloh-Schwabe has determined a casing temperature measuring point -  $t_{c \text{ max.}}$  - on all converter casings. To avoid shortening the service life or diminishing operating safety, the stipulated maximum temperature must not be exceeded at this  $t_c$  point. This point is determined by testing the converter during normal, IEC-standardised operation at the specified max. ambient temperature ( $t_a$ ), which is also indicated on the type plate. As both the design-related ambient temperature and the converter's inherent heat generation, as determined by the installed load, are subject to great variation, the casing temperature should be tested at the converter's  $t_c$  point under real installation conditions.

Temperature-protected converters feature a further protection symbol, namely a triangle containing the maximum temperature. This symbol certifies that the stipulated surface temperature of the device casing will not be exceeded during any operating state or in the event of a defect.

Vossloh-Schwabe electronic converters are tested in accordance with EN 61347. Function tests are carried out in accordance with EN 61047. VS converters can be operated without causing any inadmissible system reactions as all devices comply with EN 61000-3-2 on the limitation of mains harmonics. They also meet the EMC requirements of EN 61547. These devices are thus also protected against mains surges (as defined in the standard) that can be caused by, for instance, inductive ballasts during combined operation of fluorescent and low-voltage halogen lamps.

In addition, all devices comply with the RFI requirements of EN 55015. As the highly effective integrated filter can only limit the unit's own interference, the secondary conductor should be kept to under 2 metres in length so as to avoid RFI interference in the lighting system.

Dimmable using phase-cutting leading-edge or trailing-edge dimmers



Dimmable using phase-cutting leading-edge dimmers




Dimmable using phase-cutting trailing-edge dimmers




Working principle of a phase-cutting leading-edge dimmer

$\alpha$  = Ignition angle  
 $\lambda$  = Operating angle  
 U = Voltage  
 I = Current



Working principle of a phase-cutting trailing-edge dimmer



## Assembly Instruction for Electronic Converters

**For mounting and installing electronic converters for low-voltage halogen lamps**

### Mandatory regulations

DIN VDE 0100	Erection of low voltage installations
EN 60598-1	Luminaires – part 1: general requirements and tests
EN 61000-3-2	Electromagnetic compatibility (EMC) – part 3: maximum values – main section part 2: maximum values for mains harmonics (device input current up to and including 16 A per conductor)
EN 55015	Maximum values and methods of measurement for RFI suppression in electrical lighting installations and similar electrical appliances
EN 61547	Installations for general lighting purposes – EMC immunity requirements
EN 61347-1	Operating devices for lamps – part 1: general and safety requirements
EN 61347-2-2	Operating devices for lamps – part 2-2: special requirements for DC- or AC-powered electronic converters for incandescent lamps
EN 61047	DC- or AC-powered electronic converters for incandescent lamps – performance requirements

### Designations for VS converters

Designations for electronic converters are first listed by the name of the product family, which in each case reflects the visible product properties. The type designation should be read as follows:

EST	60	/12	.388
Electronic safety transformer	Max. wattage	Lamp voltage	Serial number

### Mechanical mounting

Mounting position Any

Clearance Min. of 0.1 m from walls, ceilings, insulation; min. of 0.1 m from other electronic converters; min. of 0.25 m from sources of heat (lamp)

Surface Solid; device must not be allowed to sink into insulation materials

Mounting location In dry rooms or in luminaires, cases, casings or similar in the instance of built-in converters

Fastening Independent converters: using screws, Ø 4 mm  
Built-in converters: fix M8 nut on the threaded stud

Heat transfer If the electronic converter is destined for installation in a luminaire, sufficient heat transfer must be ensured between the converter and the luminaire casing. During operation, the  $t_c$  point must not exceed the specified value.

1

2

3

4

5

6

7

8

9

10

## Technical specifications

Type		Operating voltage range AC	Dimmability				Temperature protection		Through-wiring <sup>4</sup>	Type of automatic cut-out and number of possible VS devices			
			Unsuitable for DC operation	Phasecutting trailing edge <sup>1</sup>	Phasecutting leading edge <sup>1</sup>	Max. potentiometer 3.3 MΩ	DALI	Thermal cut-out <sup>2</sup>		Electronic control <sup>3</sup>	Converter quantity	B (10A)	B (16A)
FlatLine	EST 60/12.388	230	x					x	–	35	56	35	56
	EST 120/12.389	230	x					x	–	18	29	18	29
LiteLine	EST 70/12.380	230–240	x	x				x	–	28	45	28	45
	EST 105/12.381	230–240	x	x				x	–	20	32	20	32
	EST 150/12.622	230–240	x	x				x	–	14	23	14	23
...Mini	EST 60/12.635	220–240	x	x				x	–	35	56	35	56
TopLine	EST 70/12.643	230–240	x	x				x	7	29	47	29	47
	EST 105/12.644	230–240	x	x				x	7	20	32	20	32
	EST 150/12.645	230–240	x	x				x	5	14	22	14	22
	EST 200/12.649	230–240	x	x				x	5	11	18	11	18
Discline	EST 70/12.601	230	x				x		–	30	49	30	49
	EST 105/12.602	230	x				x		–	21	34	21	34
CapLine	EST 75/12G.302	230	x				x		–	28	45	28	45

<sup>1</sup> The dimmer is connected to the primary side between mains and converter.

It is possible to connect several converters to one dimmer (whereby the dimmer's minimum and maximum load must be observed).  
The dimmer-converter system should be subjected to function and noise development tests prior to installation.

<sup>2</sup> In the event of overheating, the protective temperature switch turns the converter off. Once the converter has cooled down, it is automatically switched on again.

<sup>3</sup> The rating is decreased electronically in the event of overheating.

<sup>4</sup> Distributed secondary leads are only permitted on non-metallic surfaces (RFI suppression)

## Properties of electronic converters

**Overheating** Protection against overheating is provided by a temperature switch or an electronic controller (see table above).

**Short-circuit** The converter will be electronically disconnected in the event of a short-circuit at the output; once the short-circuit has been eliminated, the converter will switch on again automatically.

**Overload** Minor overloads (< 50%) will trigger the temperature switch against overheating; major overloads (> 50%) will trigger the same reaction as for short-circuit.




**Should any of the above-mentioned safety functions be triggered, disconnect the converter from the power supply, then find and eliminate the cause of the problem.**

Protection against transient mains peaks

Values compliant with EN 61547 (immunity)

## Electrical installation

Conductors Primary conductor cross-section: min. 0.75 mm<sup>2</sup>  
 Secondary conductor cross-section: min. 0,75 mm<sup>2</sup> for 50 W output and  
 min. 1 mm<sup>2</sup> for 100 W output

Stripping				
Converter	60/12.388, 120/12.389	60/12.635	70/12.643, 105/12.644, 150/12.645, 200/12.649	70/12.380, 105/12.381, 150/12.622
Type of lead	H03-VH2-F 2X0.75 H05-VH2-F 2X0.75 H03-VV-F 2X0.75 H05-VV-F 2X0.75	All usual types of lead up to 4 mm <sup>2</sup>	NYM 2X1.5; NYM 3X1.5 after breaking open the marked plastic parts in the cover over the terminal area of the transformer	H03-VH2-F 2X0.75 H05-VH2-F 2X0.75 H03-VV-F 2X0.75 H05-VV-F 2X0.75
Lead preparation				

The cables/cords of converter models EST 70/12.601 and EST 105/12.602  
 must be protected against tension and compression during mounting.

Connections Screw terminals: max. initial torque of 0.4 Nm must not be exceeded

Secondary length Min. 0.25 m (clearance to lamp), max. 2 m (RFI protection)

Secondary wiring Min. 0.1 m clearance from the mains (RFI protection)

Star wiring Twist single-wire or lead wires narrowly; silicone-insulated leads  
 are recommended

Parallel connection  
 Secondary-side parallel connection is inadmissible

Feed-through of the mains voltage  
 See table on page 364  
 Distributed secondary leads are only permitted on non-metallic surfaces  
 (RFI suppression)



## Selection of automatic cut-outs for VS converters

Dimensioning automatic cut-outs

High transient mains current pulses occur when a converter is switched on because  
 the capacitor has to load. As the lamps ignite almost simultaneously, this also creates  
 a high power drain. The high currents that occur when the system is switched on put  
 a strain on the automatic conductor cut-outs, which must be selected and dimensioned  
 to suit.

Release reaction Release reaction of automatic cut-outs in accordance with VDE 0641, Part 11; for B and C  
 characteristics. The values provided in the table on page 364 are meant as guidelines only  
 and may vary depending on the respective lighting system.

No. of converters The maximum number of VS converters (see table on page 364) applies to cases where  
 the devices are switched on simultaneously. Specifications apply to single-pole fuses. The  
 number of permissible ballasts must be reduced by 20% for multi-pole fuses. The considered  
 circuit impedance equals 400 mΩ (approx. 20 m [2.5 m<sup>2</sup>] of conductor from the power  
 supply to the distributor and a further 15 m to the luminaire).

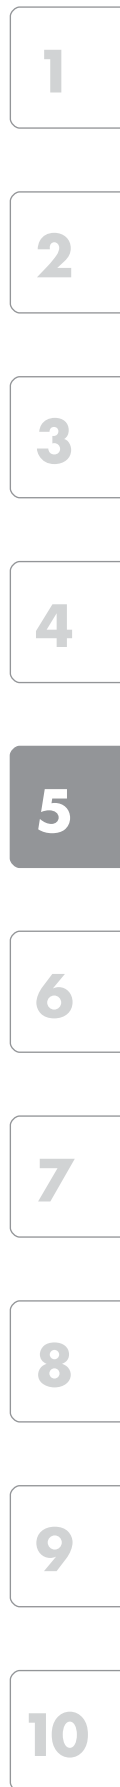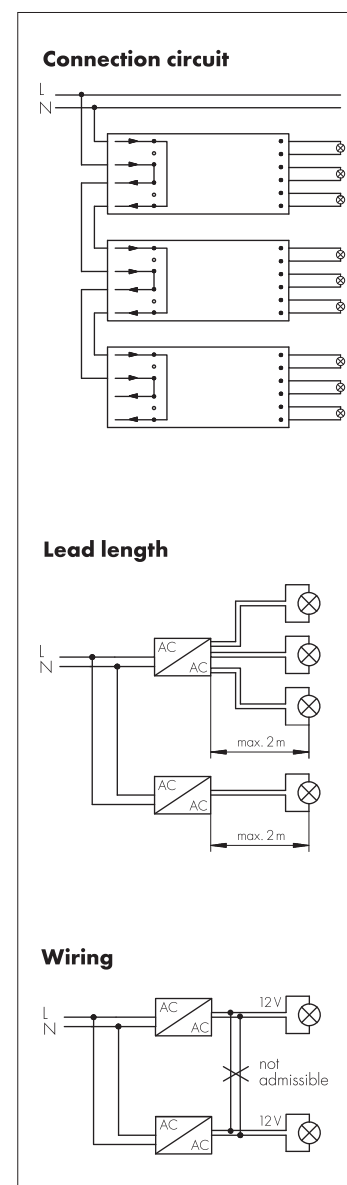

## Dimmability of electronic converters

### Dimmed operation

VS converters can be operated with phase-cutting trailing-edge dimmers. Some converters can additionally be operated with phase-cutting leading-edge dimmers (see table on page 364). The dimmer is connected to the primary side between mains and converter. It is possible to connect several converters to one dimmer (whereby the dimmer's minimum and maximum load must be observed). The dimmer-converter system should be subjected to function and noise development tests prior to installation.

## Electromagnetic compatibility (EMC)

### Mains Harmonics

Maximum values are observed in accordance with EN 61000-3-2.

### Interference

The requirements of EN 55015 must be met for luminaires with converters for operating low-voltage halogen lamps. Vossloh-Schwabe converters are designed and manufactured to ensure these requirements are satisfied provided the installation instructions regarding the interference voltage at the connection terminals and electromagnetic interference fields up to 300 MHz are observed.

## Additional information

### Wiring

To ensure good radio interference suppression and the greatest possible operating safety, the following points should be observed when installing electronic converters:

- Conductors between the EST and the lamp (HF conductors) must be kept short (reduction of electromagnetic interference).
- Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another. The distance between HF conductors and mains conductors should be as large as possible, ideally > 5 cm. (This prevents the induction of interference between the mains and lamp conductors).
- The mains conductor within the luminaire must be kept short (to reduce the induction of interference).
- The mains conductor must not be laid too close to the EST (this is especially important in the event of through-wiring).
- Mains and lamp conductors must not be crossed. Should this be impossible to avoid, conductors should be crossed at right angles to one another (to avoid inducing interference between mains and HF conductors).
- Should conductors be wired through metal parts, such conductors must always be additionally shielded (e.g. with an insulating sleeve or grommet).

### Temperature

Reference point temperature  $t_c$

The safe operation of electronic converters is dependent on the maximum permissible temperature not being exceeded at the measuring point. Vossloh-Schwabe has determined a casing temperature measuring point –  $t_{c \max}$  – on all converter casings. To avoid shortening the service life or diminishing operating safety, the stipulated maximum temperature must not be exceeded at this  $t_c$  point. This point is determined by testing the converter during normal, IEC-standardised operation at the specified ambient temperature ( $t_a$ ), which is also indicated on the type plate. As both the design-related ambient temperature and the converter's inherent heat, as determined by the installed load, are subject to great variation, the casing temperature should be tested at the  $t_c$  point under real installation conditions.

Ambient temperature  $t_a$

The ambient temperature – as specified on every converter – denotes the permissible temperature range within the luminaire or at the place of installation.

# Technical Details – Components for Incandescent and Retrofit Lamps

Reliability Service life of 50,000 hrs at reference point temperature  $t_c$ , whereby a switching cycle of 165 minutes on and 15 minutes off is assumed. Failure rate:  $\leq 0.2\%/1,000$  hrs  
**In order to achieve the average service life, the maximum temperature ( $t_{c \text{ max.}}$ ) must not be exceeded at the  $t_c$  point.**

Emergency lighting VS electronic converters cannot be used for emergency lighting purposes as they are unsuitable for DC voltage operation.

1

2

3

4

5

6

7

8

9

10

## Electromagnetic Transformers

Owing to the low internal impedance of electromagnetic transformers, high currents can occur in the event of a short-circuit on the secondary side, which can lead to the transformer being destroyed. For this reason, IEC 61558-1 differentiates between three types of transformer:

### Transformers without short-circuit resistance

These transformers require external protection to prevent excessive temperatures being generated.

At Vossloh-Schwabe, these transformers are marked with the symbol "not short-circuit proof safety transformer". To protect against current overload during overload or short-circuit operation, Vossloh-Schwabe recommends installing a fuse on the primary side. As an aid to the user, the rating of this fuse is stated on the type plate in accordance with IEC 60127. The installed primary-side fuse should be easily accessible so that it can be readily replaced at any time.

### Transformers with (limited) short-circuit resistance

These transformers feature a safety device that prevents excessive temperatures being generated.

Electromagnetic transformers with thermal cut-outs afford a limited degree of short-circuit resistance and do not need to be additionally fused. VS safety transformers of limited short-circuit resistance are designed to safely cut out in the event of overload or short-circuit, but not to restart automatically after cooling off. The transformer must first be disconnected from the mains (i.e. switched off and on) before it can be restarted. The thermal cut-outs are dimensioned to ensure that the maximum permissible winding temperature of 225°C (transformers of thermal class B) or 240°C (F) or 260°C (H) is not exceeded in the event of overload or short-circuit.

### Transformers with (unlimited) short-circuit resistance

These transformers are designed to ensure that fixed maximum temperatures are not exceeded in the event of overload or short-circuit.

This type of safety transformer is not in common use within the lighting industry due to the relatively large dimensions it needs to meet the overload and short-circuit requirements.

All transformers will function perfectly and meet the requirements of the standard after the overload or short-circuit has been eliminated.

In addition to the above, there are also so-called **failsafe transformers** that are rendered permanently inoperative in the event of improper use, but do not pose a threat to the user or the surroundings. Vossloh-Schwabe does not provide this type of isolation transformer.

All Vossloh-Schwabe transformers are tested for compliance with the safety requirements of European standard EN 61558 regarding creepage and air clearance distances, the winding temperature and the maximum permissible ambient temperature ( $t_a$ ).

EN 61558 specifies five insulation classes for electromagnetic transformers; respective testing temperatures and times are assigned to these classes. Due to the quality of the insulation materials used by Vossloh-Schwabe, VS transformers are only available in the three highest insulation classes B (120°C), F (140°C) and H (165°C). In this case, the quoted temperature refers to the maximum permissible winding temperature during permanent operation.

As luminaire casings made of plastic or sheet metal will discharge heat to varying degrees and because transformer installation conditions can differ, a transformer's winding temperature must be tested within the luminaire. The measured values will show whether the maximum temperature corresponds to the transformer's insulation class.

On request, Vossloh-Schwabe can carry out such luminaire tests to assess built-in components.

### Protection symbols



Non short-circuit proof safety transformer



Limited short-circuit proof safety transformer



Rated fuse value

$t_a$  65

Transformer's maximum permissible ambient temperature



Thermal cut-out (reset after disconnection from the mains)

## Assembly Instruction for Electromagnetic Transformers

**For mounting and installing electromagnetic transformers for low-voltage halogen lamps**

### Mandatory regulations

DIN VDE 0100	Erection of low voltage installations
EN 60598-1	Luminaires – part 1: general requirements and tests
EN 61558-1	Safety of transformers, power supply units and similar – part 1: general requirements and tests
EN 61558-2-6	Safety of transformers, power supply units and similar – part 2-6: special requirements for safety transformers for general use
EN 61000-3-2	Electromagnetic compatibility (EMC) – part 3: maximum values – main section part 2: maximum values for mains harmonics (device input current up to and including 16 A per conductor)
EN 55015	Maximum values and testing methods for radio disturbance of electrical lighting facilities and similar electrical equipment
EN 61547	Installations for general lighting purposes – EMC immunity requirements

### Technical specifications

Mains voltage range	VS safety transformers can be operated at the specified mains voltage within a tolerance range of $\pm 10\%$
Leak current	$\leq 0.1$ mA per safety transformer
Power factor	$\lambda \geq 0.85$
Compensation	Not required

1

2

3

4

5

6

7

8

9

10



## Mechanical mounting

Mounting position

Any

Mounting location

Safety transformers are designed for installation in luminaires or comparable devices. Independent safety transformers do not need to be built into a casing.

Fastening

Preferably using screws, Ø 4 mm

Insulation classes and maximum temperatures

In accordance with EN 61558, safety transformers are assigned to insulation classes on the basis of the insulation materials used (also called insulation material classes for this reason) in the transformers. These insulation classes also prescribe respective maximum winding temperatures that must not be exceeded during normal operation or in the event of overload or short-circuit.

Compliance with the maximum winding temperatures is tested by measuring the resistance of the transformer's copper winding.

Insulation classes for safety transformers in accordance with EN 61558-1

	A	E	B	F	H
Max. winding temperature (1.06 U <sub>N</sub> ) during normal operation	100 °C	115 °C	120 °C	140 °C	165 °C
Max. winding temperature in the event of overload or short-circuit	200 °C	215 °C	225 °C	240 °C	260 °C

## Electromagnetic compatibility (EMC)

Interference

Interference voltage measurements do not have to be taken for luminaires with magnetic safety transformers for operating low-voltage halogen lamps as these are systems with lamp voltages of under 100 Hz and it is assumed that such systems do not cause interference.

Interference immunity

Thanks to the robust design and choice of materials, magnetic safety transformers provide a high degree of interference immunity and are not impaired by admissible mains power interference.

Mains harmonics

Owing to the Ohmic resistance characteristics of low-voltage halogen lamps and the low degree of distortion caused by magnetic transformers, mains harmonics remain low.

## Safety functions of VS transformers

Load	Transformer features	
	Unprotected (OS)	With self-locking temperature protection (TS)
Overheating	Is not recorded	Protection is provided by the built-in thermal switch
Short-circuit	Protection must be provided	
Overload	by devices fitted in the luminaire (fuse or thermal switch)	

**Should one of the safety functions be triggered, the transformer must be disconnected from the mains, the cause of the fault found and then eliminated.**

## Dimmer operation

VS safety transformers can be controlled using progressively adjustable phase-cutting leading-edge dimmers for low-voltage halogen lamps.

## Reliability and service life

VS safety transformers are designed for a long service life. Provided the specified maximum values for the winding temperature are complied with during operation, a service life of 10 years can be expected. Failure rate: < 0.025%/1,000 hrs

## Electrical installation

**Conductors** Primary conductor cross-section: min. 0.75 mm<sup>2</sup>,  
secondary conductor cross-section: min. 0.75 mm<sup>2</sup> for 50 W output  
and a min. of 1 mm<sup>2</sup> for 100 W output

**Connections** Terminal screws: max. torque of 0.5 Nm must not be exceeded

**Parallel connection** Parallel connection is admissible on the primary side, but is inadmissible on the secondary side



## Conductors for low-voltage halogen installations

As the high temperatures associated with the operation of low-voltage halogen lamps place severe demands on lampholder conductors, a skilful combination of conductor and insulation is essential. Tin-plated copper conductors with silicone insulation are recommended for temperatures of up to 180°C at the cable's conductor; nickel-plated copper cables with polytetrafluoroethylene (PTFE) sheathing are recommended for temperatures of up to 250°C. Welded connections ensure the most effective heat discharge. Control measurements should be carried out if other connection types are used, e.g. crimping or plug connectors. To prevent the risk of additional heat generation, the maximum permissible current load must be observed when dimensioning the conductor cross-section. When using electromagnetic transformers, the conductor resistance causes a relatively large voltage drop. This drop in voltage is always associated with a reduction of luminous flux. For instance, an 11% drop in voltage will lead to a 30% drop in luminous flux. For this reason, care should be taken to ensure secondary conductors are kept as short as possible and conductor cross-sections are adequately dimensioned when wiring luminaires. Nevertheless, transformers should not be mounted too near the light source (> 25 cm clearance if possible) to prevent the heat generated by the lamp from raising the ambient temperature above the critical level for a transformer.

As electronic converters operate at high frequencies, consideration must be taken of the skin effect, i.e. the displacement of the electrons from the middle of the conductor to its surface. As a result, the full cross-section of the conductor is no longer used, resistance increases and thus leads to a greater drop in voltage. In addition, AC resistance, which is caused by feed line inductance, can result in an even greater voltage drop. It is therefore recommended that lamp conductors be laid closely parallel or twisted together.

Voltage losses (V) with a two-metre secondary conductor

Working frequency	Load W	Cross-section/Voltage drop		
		0.75 mm <sup>2</sup>	1 mm <sup>2</sup>	1.5 mm <sup>2</sup>
50 Hz (electromagnetic transformers) any wiring layout	50	0.38 V	0.29 V	0.2 V
	100	0.74 V	0.56 V	0.39 V
40 kHz (electronic converters) any wiring layout (loops)	50	1.4 V	1.25 V	1.2 V
	100	3.3 V	3.1 V	3 V
40 kHz (electronic converters) wires twisted together or closely parallel	50	0.5 V	0.45 V	0.35 V
	100	1.2 V	1 V	0.85 V

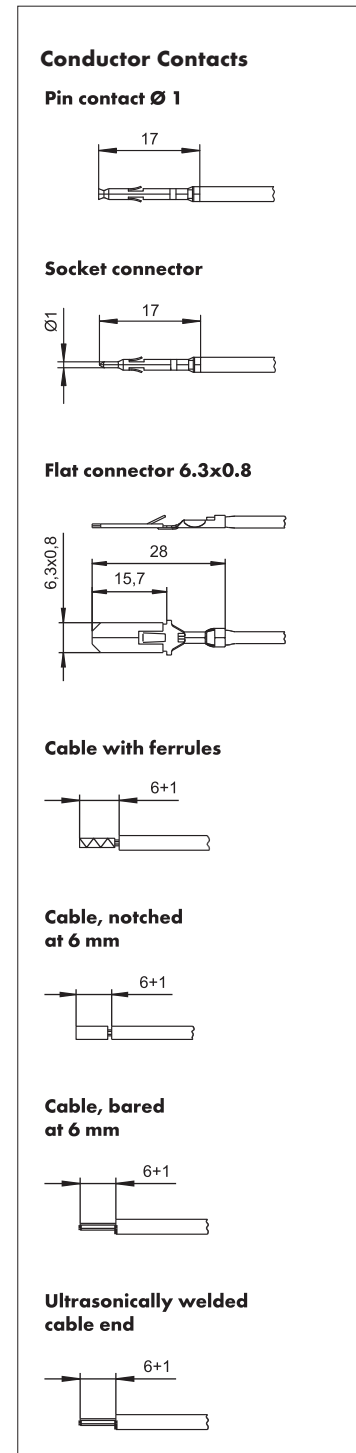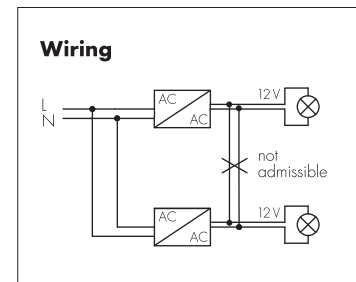

## Conductors for installations with halogen lamps

All conductors must be selected to suit the luminaire conditions (see table) in terms of material, cross-section and insulation. Testing these conductors under worst case conditions is essential as the commonly occurring high temperatures considerably reduce the conductivity of the conductor and hence its current-carrying capacity.

Insulation	Conductor Material	Cross-section mm <sup>2</sup>	Mains voltage V	Max. temperature °C
SI	Cu tin-plated (Cu vz)	0.75	300	180
FEP	Cu tin-plated (Cu vz)	0.75	300	180
PTFE	Cu nickel-plated (Cu vn)	0.75	500	250
PTFE	Cu nickel-plated (Cu vn)	1	500	250
PTFE	Ni	1	500	250
PTFE	Ni	1.5	500	250

## Lampholders

### For low-voltage halogen lamps

With the exception of B15d bases, the low-voltage sector is dominated by pin bases, which are fitted with a variety of different pin distances and diameters. Apart from classic lampholders that ensure both the electrical contact and the correct positioning of the lamp, connection elements are also available. These components are solely responsible for establishing electrical contact and are used in cases where, for instance, the regulations demand that the lamp be attached to its reflector (e.g. cold-light reflector lamps with GZ4 and GX5.3 bases). Extremely high temperatures are also generated when operating low-voltage halogen lamps as a result of the tungsten-halogen cycle and high lamp currents. In addition, the respective luminaires are often of very compact design, which leads to heat accumulation and thus to high internal temperatures. The materials the lampholder is made of thus play a vital role for the luminaire's operating safety and the lamp's service life. In addition to tried-and-tested materials – ceramics for casings and mica for covers – ever more frequent use is being made of highly heat-resistant plastics like LCP (liquid crystal polymer for e.g. G4, GU4, GX5.3, GU5.3 and GY6.35 lampholders) and PPS (polyphenylene sulphide for G4 lampholders). Plastic lampholders provide clear advantages: narrow dimensional tolerances, no material fractures, low weight and clip-attachment options.

The type of contact also plays an important role. Conventional contacts are only attached to one side of the lamp pin. In contrast, additional contact points – known as multipoint contacts – lead to a reduction of current density at the point of transition from the lamp pins to the lampholder contact and with that to a decrease in temperature. These contacts provide the further advantage of ensuring superior heat dissipation from the lamp pins to the conductor. The temperature advantage of multipoint contacts in defined conditions (including welded-on conductors) can amount to as much as 100 °C. In extremely rare cases, due to the high internal pressure in the bulb, it is possible for the lamp to shatter. For reasons of fire prevention (high temperature of the glass bulb), the lamp's components must be prevented from falling out. Enclosed luminaires meet these requirements. Open luminaires, however, may only be operated using lamps with enclosed bulbs or low-pressure lamps. Lamps of this kind are suitably marked with pictograms on the lamp's packaging and in the lamp manufacturer's documentation. Lamps marked with pictogram No. 1 are suitable for use with open luminaires, whereas those marked with pictogram No. 2 may only be used in enclosed luminaires.

Lampholders for low-voltage halogen lamps are equipped with mounted cables or with plug-type connectors. In addition to the various lampholders contained in the catalogue, further lampholder models with various cable lengths and of various qualities as well as lampholders with plug-connected cables can be made available on request.

**VS lampholders for the UL market and UL approved leads are available for all common lamp types.**

**Further information can be found at [www.unvlt.com](http://www.unvlt.com).**




**1**



**2**

## Bases of the most widely used low-voltage halogen lamps

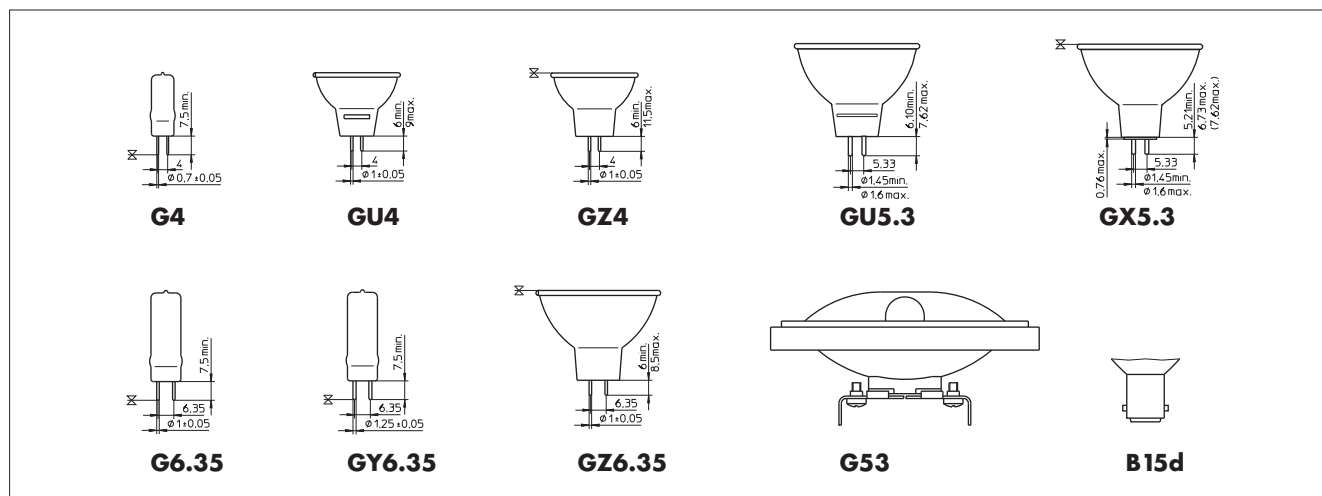

## Lampholders for mains voltage halogen lamps


A major factor in lampholder design is the lamp temperature, which is determined by the tungsten-halogen cycle, high lamp current and high wattages. Lampholder casings can be made of ceramics, metal or the ever more popular highly heat-resistant thermoplastics like PET (polyethyleneterephthalate), PPS (polyphenylene sulphide) and LCP (liquid crystal polymer). The most suitable contact materials for these temperatures are nickel, copper-nickel alloys or copper materials with sufficiently thick nickel coatings. For tubular lamps (R7s base), the standard IEC 60061-2 7005-53 prescribes the respective contact pressure of lampholder contact materials.

Although halogen lamps offer twice the service life of general-purpose light bulbs, this can only be fully realised if luminaire manufacturers observe the recommended maximum temperatures at the lamp's pinch point. There is usually a welded-on molybdenum plate at the pinch point where the lamp base pins join the lamp filament. Lamp manufacturers ascertain the pinch temperature at this point, which is generally located within the lamp's quartz glass, using specially prepared measuring lamps. The pinch temperature is a critical thermal reference point which must not be exceeded within the luminaire.

**VS lampholders for the UL market and UL approved leads are available for all common lamp types.**

**Further information can be found at [www.unvlt.com](http://www.unvlt.com).**

## The bases of the most widely used mains voltage incandescent lamps

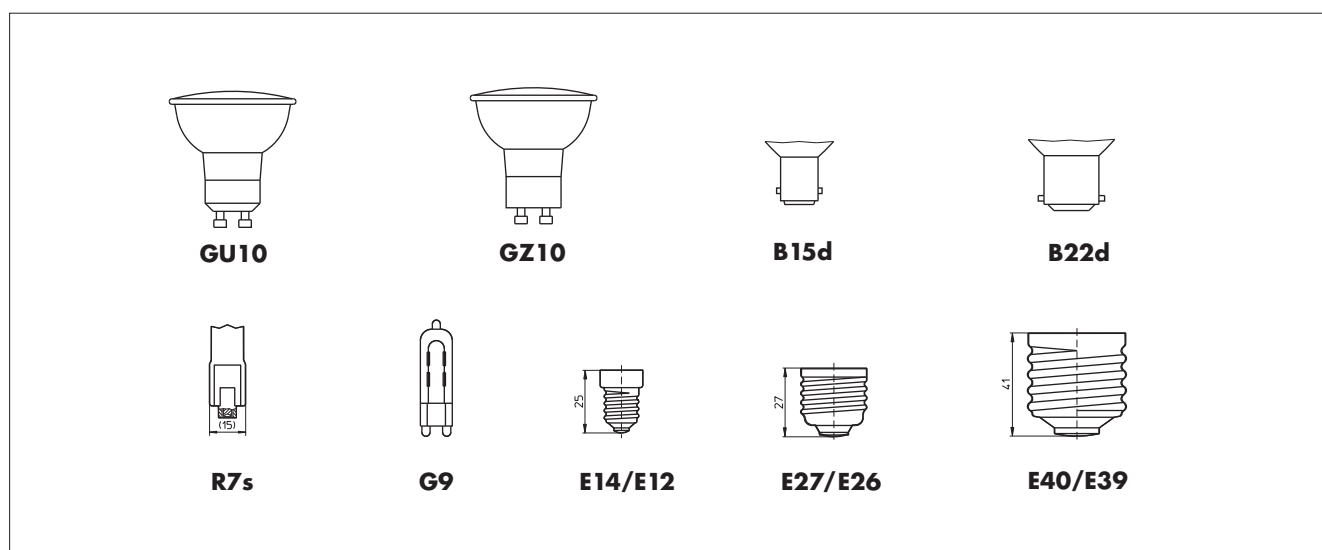

## 6-80 W EMERGENCY LIGHTING MODULES



## EMERGENCY LIGHTING

Emergency lighting systems spring to life any time normal artificial lighting systems fail. Emergency lighting is designed to ensure that work can continue without risk, that staff can safely leave any workplaces involving special hazards and that there is sufficient lighting to illuminate rescue paths/routes as well as to avoid panic situations.

As power cuts result in a risk to safety, legislation has been enacted in the form of the Health and Safety at Work Directive (Europe) and the Health and Safety at Work Acts of the individual European countries (e.g. Germany), all of which stipulate that emergency lighting must be provided. The requirements placed on emergency lighting installed in places of public assembly and public buildings are governed by supplementary directives and laws.

Vossloh-Schwabe's emergency lighting units are designed for use with T5, T8 and compact fluorescent lamps and can be operated with electromagnetic or electronic ballasts.

VS emergency lighting units are suitable for both continuous and standby circuits with a nominal operating period of 1 or 3 hours.

# 6

## Emergency Lighting Modules for TC and T Lamps

**Emergency lighting modules with self-diagnosis function**

**376–377**

**Technical details for emergency lighting modules**

**378–385**

General technical details

394–401

Glossary

402–404

1

2

3

4

5

**6**

7

8

9

10

## Emergency Lighting Modules 6 to 80 W with Self-Diagnosis Function

### EMXs – Emergency lighting modules

For one-, two-, three- or four-lamp operation with standard and dimmable electronic or magnetic ballasts

EB phase is switched off during emergency operation

Short circuit protection

RoHS-compliant (excluding rechargeable batteries)

5-pin technology and therefore EMC-compliant even during emergency operation

Suitable for protection class I

EN 61347-1, EN 61347-2-7

Suitable for systems in accordance with VDE 0108 or EN 50172

Not suitable for lamps with an integrated starter

Cyclic charging of the NiMH battery is micro-processor controlled, which can extend battery life by up to 30%

Dimensions (LxWxH): 210x31.4x21.5 mm

Fixing hole distance: 205.5 mm

Nominal voltage: 230 V ±10%, 50–60 Hz

Ambient temperature  $t_a$ : 0 to 50 °C

Unit: 25 pcs.

These VS emergency lighting modules include an automatic self-diagnosis feature that performs a two-minute function test of the device, the lamp and the battery every seven days.


In addition, the operating period is tested every 12 months with subsequent battery reactivation.

### Optical status display


- Red LED, flashing intermittently: defective lamp. The status display will be reset approx. one minute after the fault has been rectified.
- White LED, not illuminated: if connected to the power supply, the LED must turn green after a maximum of five minutes. If not, the device either has no voltage supply or the emergency lighting module is defective.
- Red LED, permanently flashing: battery capacity is too low or the battery supply line has been interrupted.
- Green LED: fully functional.




### Emergency lighting module

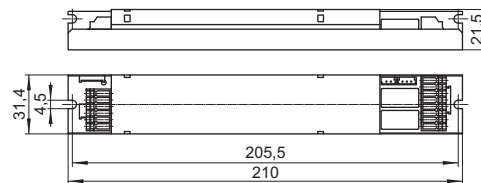

### LED

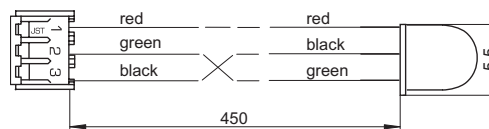

### Rechargeable battery

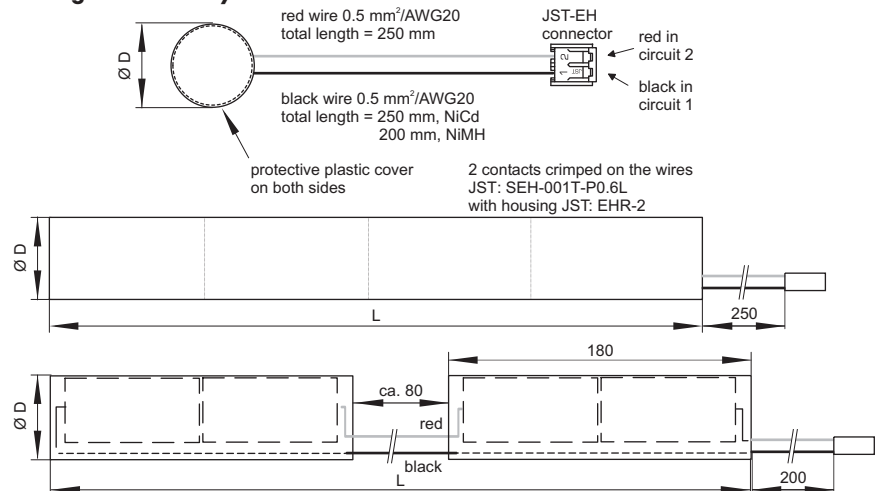

## Emergency Lighting Modules 6 to 80 W with Self-Diagnosis Function

### EMXs – Emergency lighting modules

Type	Ref. No. Module	Ref. No. Battery	Nominal operating period hrs.	Rechargeable battery type	Dimensions LxD (Ø) of battery mm	Test function	Weight module g	Weight battery g
EMXs 180.000	<b>188792</b>	<b>188823</b>	1	4.8V 1.8Ah NiCd	1 / 190 x 23	automatic	160	200
EMXs 180.001	<b>188793</b>	<b>188824</b>	3	4.8V 4.5Ah NiCd	1 / 240 x 33	automatic	160	490
EMXs 180.002	<b>188794</b>	<b>188825</b>	1	4.8V 1.8Ah NiMH	1 / 200 x 17	automatic	160	140
EMXs 180.003	<b>188795</b>	<b>188826</b>	3	4.8V 4.5Ah NiMH	2 / 450 x 19	automatic	160	320


Circuit diagrams see page 382–384

## HOLDERS for Rechargeable Batteries for Emergency Lighting Modules

Material: PC (188828: PBT)

Type: Rechargeable Battery Holder

Ref. No.	For rechargeable battery type	Dimensions (mm)					
		a	b	c	d	e	f
<b>188827</b>	4.8V 1.8Ah NiCd	35.0	18.0	26.3	26.7	13.0	5.5
<b>188828</b>	4.8V 4.5Ah NiCd	39.0	32.2	36.2	37.3	12.4	6.0
<b>188829</b>	4.8V 1.8Ah NiMH	22.5	15.0	22.8	22.5	8.0	4.0
<b>188829</b>	4.8V 4.5Ah NiMH	22.5	15.0	22.8	22.5	8.0	4.0



It is recommended to use two holders per rechargeable battery to ensure optimum hold.

### Table of suitable lamp types

Lamp type	Lamp nominal output W
T8	15, 18, 32, 36, 58, 70
T5 HE	14, 21, 28, 35
T5 HO	24, 39, 49, 54, 80
T5	6, 8, 13
T-R5 (T-R16)	22, 40, 55, 60
T-R (T29-R)	22, 32, 40
TC-L/TC-F	18, 24, 36, 40, 55, 80
TC-DEL	10, 13, 18, 26
TC-TEL	13, 18, 26, 32, 42, 57, 70
TC-SEL	7, 9, 11
TC-DD (2D)	10, 16, 21, 28, 38, 55

### Luminous flux factor of lamps during emergency operation

Lamp nominal output W	Luminous flux factor* %
6	43.0
8	32.0
18	13.0
28	9.0
32	7.0
35	7.0
36	7.0
49	4.7
54	4.3
55	4.7
58	5.2
70	4.3
80	3.7

\* Theoretically defined reference values at 25°C ambient temperature



6

Emergency Lighting Modules for TC and T Lamps

**Assembly instructions for emergency lighting modules**

**379–384**

Electrical installation

379–380

Emergency lighting module display

381

Circuit diagrams

382–384

**General technical details**

**394–401**

Glossary

402–404

Emergency lighting modules are designed for operation with 6 to 80 W, 4-pin fluorescent lamps. Luminaires with integrated emergency lighting modules can be operated using a continuous or standby circuit.

Technical specifications	EMXs emergency lighting modules
Permissible mains voltage	230 V ±10%
Permissible mains frequency	50-60 Hz
Power consumption with standby circuit	3 W
Nominal period of operation	1 to 3 hours, depending on the type of rechargeable battery
Batteries	NiCd or NiMH
Ambient temperature	0* to 50 °C
Charging time	24 hrs
Protection class	1
Degree of protection	IP20
Certification	CENELEC
Tested in accordance with	EN 61347-2-7
Suitable for systems compliant with	VDE 0108 / EN 50172
Casing	Metal (zinc-plated)
Installation outside the luminaire	Permissible lead length between the emergency lighting module and the lamp must not exceed two metres.
Luminous flux factors during emergency operation	See the table on page 377, values apply to 25 °C ambient temperature.

\* Ignition in progress; the values of the colour rendering index and the luminous flux factor may deviate.

## Assembly Instructions for Emergency Lighting Modules

### For mounting and installing of emergency lighting modules

If the emergency lighting module is integrated in the luminaire, the LED and battery have to be wired separately, i.e. not in parallel with the mains or lamp. Emergency lighting modules must be fixed in a suitable spot within the luminaire (4-mm bore holes for mounting).


In the interest of maximising battery capacity and service life, care must be taken to ensure the battery is positioned at the coolest part of the luminaire. The ambient temperature of the battery must not exceed 50 °C. Emergency lighting modules must not be mounted on surfaces that ignite, melt or undergo some other thermal change at a temperature of 60 °C. Moreover, emergency lighting modules must not be operated in explosion-endangered enclosed spaces.

### Electrical installation

The respective ordinances and standards valid at the place of operation must be observed for installation purposes. Emergency lighting modules and luminaires must only be installed by trained staff. Operating voltages exceed 50 V. Caution: potentially fatal hazard!

Prior to first operation of emergency luminaires, all covers must be attached. Furthermore, care must be taken to ensure that the supply voltage complies with the specifications on the type plate and the protective conductor is connected.

1. Fuse
2. Light switch
3. Room lighting
4. Emergency luminaires



Emergency luminaires must be connected to a direct phase to enable mains monitoring and ensure constant charge retention. This phase must be connected to the group fuse of the regular room luminaire. Emergency luminaires are generally delivered with uncharged batteries and must be connected to the mains for at least 48 hours to be fully functional or for approx. 10 minutes for mains operation in the case of a continuous circuit.

## Additional information for optimising EMC

Information on the installation of electronic ballasts for optimising EMC

To ensure good radio interference suppression and the greatest possible operating safety, the following points should be observed when installing electronic ballasts:

- Conductors between the EB and the lamp (HF conductors) must be kept short (reduction of electromagnetic interference). High-potential lamp conductors must be kept as short as possible, in particular with tubular lamps. Lamp conductors of this kind are labelled with an \* in the wiring diagram on the type plate.
- Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another. The distance between HF and mains conductors should be as large as possible, ideally > 5 cm. (This prevents the induction of interference between the mains and lamp conductors.)
- The mains conductor within the luminaire must be kept short (to reduce the induction of interference).
- Devices must be properly earthed. EBs require secure contacts to the luminaire casing or must be earthed using a PE connection. This PE connection should be effected using an independent conductor to achieve better dissipation of the leak current. EMC improves at frequencies greater than 30 MHz.
- The mains conductor must not be laid too close to the EB or the lamp (this is especially important in the event of through-wiring).
- Mains and lamp conductors must not be crossed. Should this be impossible to avoid, conductors should be crossed at right angles to one another to avoid inducing interference between mains and HF conductors.
- Should conductors be wired through metal parts, such conductors must always be additionally shielded (e.g. with an insulating sleeve or grommet).

**Maintenance** With regard to system maintenance and control, care must be taken to ensure compliance with any ordinances and standards governing emergency lighting at the place of installation. Prior to opening lamp covers, the following procedure must be observed:

1. Disconnect luminaires from the mains voltage.
2. Remove cover.
3. Disconnect battery from the emergency lighting module (disconnect the plug).

VS recommends connecting control LEDs to be visible on the outside of emergency luminaires to enable simple and regular control of emergency luminaires and emergency lighting modules.

## Changing batteries

Batteries need to be replaced if the operating period of luminaires falls short of 60 minutes in the case of 1-hour operation and 180 minutes for 3-hour operation, respectively. Emergency lighting modules have a status display for this purpose.

Spent batteries must be replaced with the manufacturer's original batteries only. Furthermore, the polarity of the batteries must be strictly observed. The battery supply lines of the emergency lighting module are marked as follows:

red = +; black = -

## Emergency lighting module display

Normal operation is indicated by a green LED. During emergency operation or for as long as the battery remains fully discharged, the LED is off (i.e. does not glow). The LED will flash red if the battery is missing or not properly connected.


## Automatic test of emergency lighting modules

In the case of emergency luminaires with emergency lighting modules, the operational readiness of the device, the lamp and the battery is tested automatically every seven days. In addition, battery capacity is measured during a simulated loss of mains power every 12 months.

The first capacity test will be carried out seven days following initial installation or any repair work. The LED must be checked after the first self-test. A green LED indicates all is in working order, any other display indicates a problem.

The device features a two-colour LED display to indicate that the emergency luminaire is ready for use.

## Optical status display

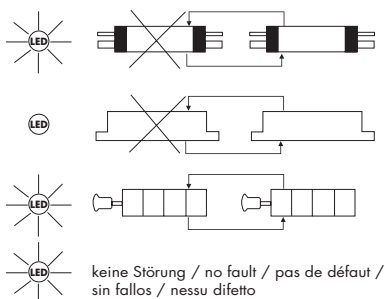

Emergency luminaires merely require regular visual inspection of the status display (LED) and the luminaire itself.

Red LED, flashing intermittently	During initial operation, a lamp recognition test is first carried out. Prior to and during this test, the LED will be red and flash intermittently.
White LED, not illuminated	If connected to mains power, the LED must turn green after a maximum of five minutes. If not, the device has no mains voltage or the emergency lighting module is defective.
Red LED, continuous flashing	Battery capacity is too low or the battery supply line has been interrupted. The warning light will go off again as soon as the problem has been rectified.
Green LED	Fully functional.

## Notes

Vossloh-Schwabe accepts no liability for any direct, indirect or incidental damage caused by putting a device to any improper use, i.e. any use not expressly permitted by VS. Similarly, Vossloh-Schwabe accepts no liability for third-party claims arising from putting a device to any improper use, i.e. any use not expressly permitted by VS. Emergency lighting modules must not be opened or modified in any way. The components of emergency lighting modules must be replaced with original parts only.

Should emergency lighting modules be damaged in a way that suggests it cannot be operated safely, the luminaires or emergency lighting modules, respectively, must not be operated. VS reserves the right to make changes to diagrams, weights, tables of dimensions or other such details included in the catalogue or instructions for use without prior notice if such changes prove to be necessary or are made as a result of technological progress. VS emergency lighting modules are patent protected.

Any act of producing counterfeit VS products will be prosecuted according to criminal and civil law.

## Caution!

Emergency lighting modules from VS must not be operated with amalgam lamps.

1

2

3

4

5

6

7

8

9

10


## Circuit Diagrams

### For VS emergency lighting modules


Notes for wiring:

- The distance between mains lead and lead 8 should be as large as possible
- Leads 2/4/6/8 must be kept short


### Circuit diagrams – 1-lamp operation

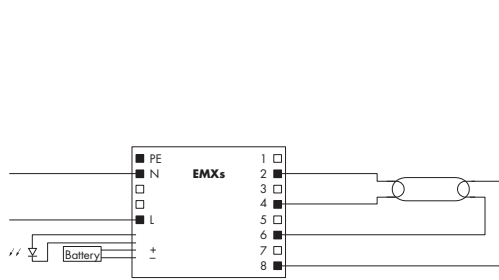


1-lamp operation  
without electronic or electromagnetic  
ballast (continuous circuits)

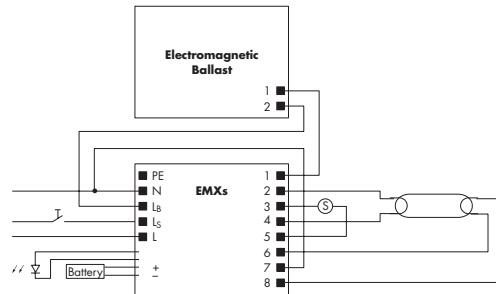

1-lamp operation  
with electromagnetic ballast

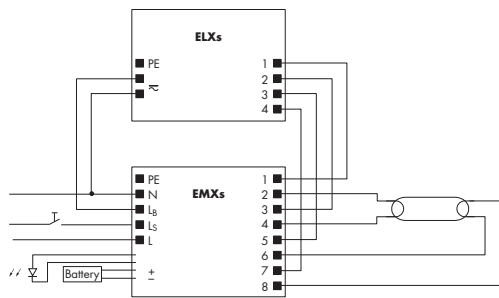


1-lamp operation – Warm start  
with electronic ballast ELXs

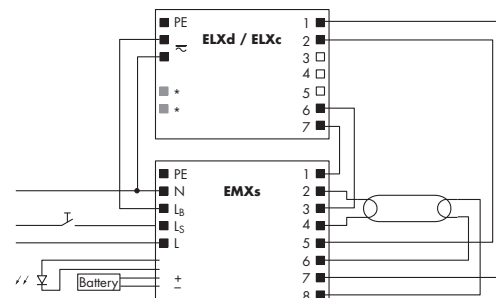


\*nur bei dimmbaren Vorschaltgeräten/only with dimmable ballasts/juste avec ballasts graduables/solo con alimentatori dimmerabili/sólo con reactancia regulable

1-lamp operation – Dimming / Warm start  
with electronic ballast ELXd / ELXc

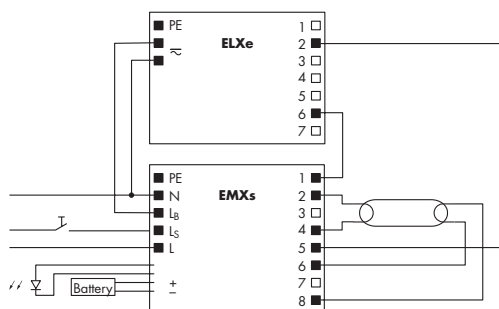


1-lamp operation – Instant start  
with electronic ballast ELXe


## Circuit diagrams – 2-lamp operation

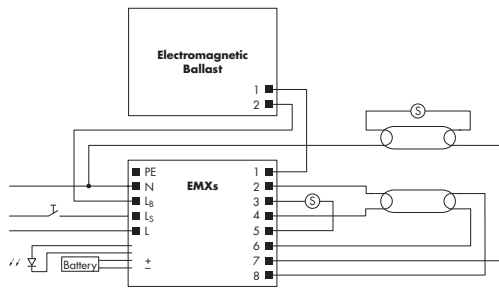


2-lamp operation  
with electromagnetic ballast

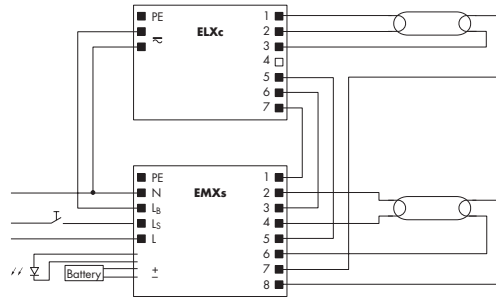


2-lamp operation - Warm start  
with electronic ballast ELXc

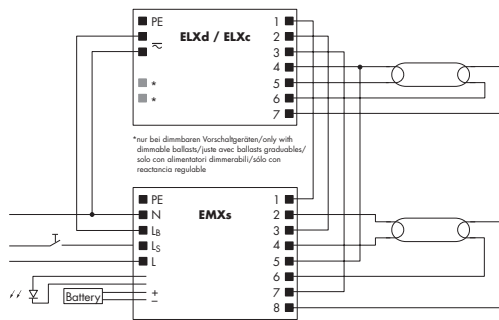


2-lamp operation - Dimming / Warm start  
with electronic ballast ELXd / ELXc

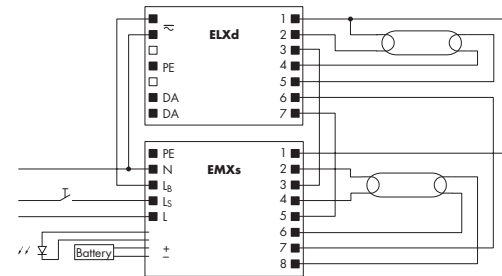

2-lamp operation - Dimming  
with electronic ballast ELXd

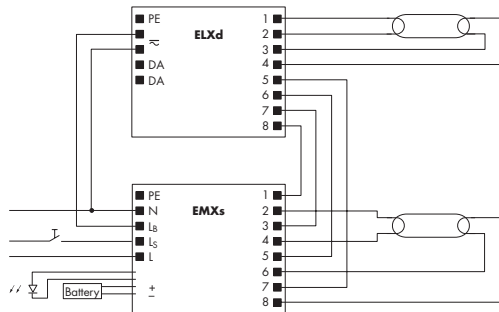


2-lamp operation - Dimming  
with electronic ballast ELXd

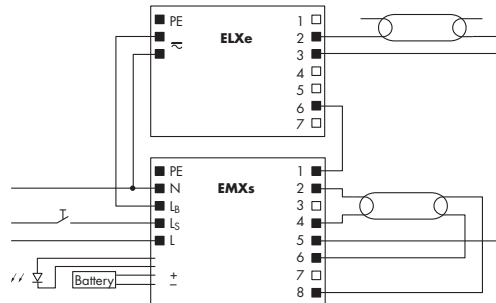


2-lamp operation - Instant start  
with electronic ballast ELXe

## Circuit diagrams – 3-lamp operation

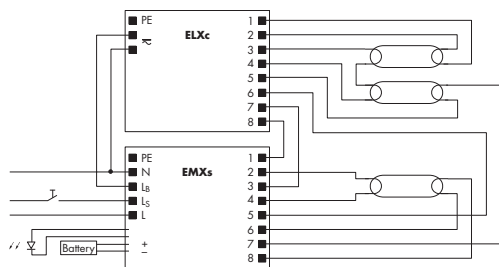

3-lamp operation - Warm start  
with electronic ballast ELXc

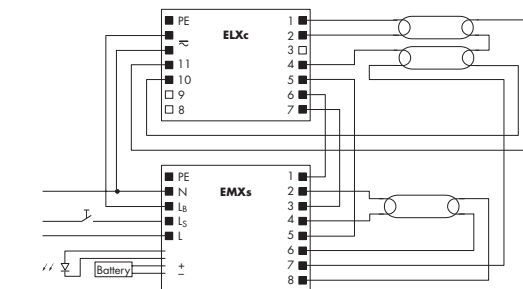

3-lamp operation - Warm start  
with electronic ballast ELXc

1

2

3

4

5

6


7

8


9

10

## Circuit diagrams – 3-lamp operation

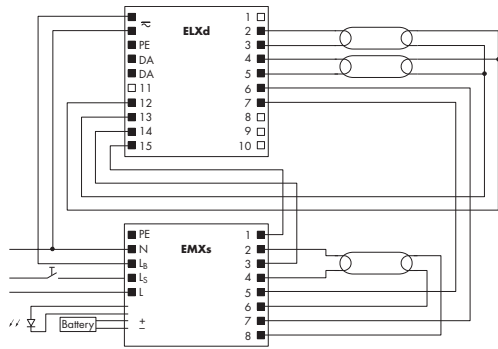


3-lamp operation - Dimming  
with electronic ballast ELXd

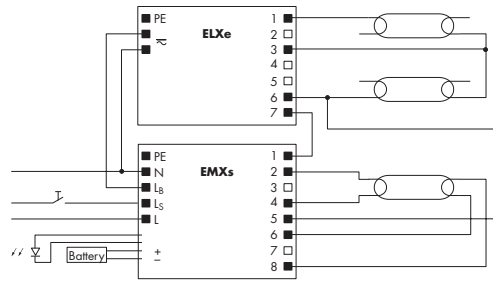


3-lamp operation - Instant start  
with electronic ballast ELXe


## Circuit diagrams – 4-lamp operation

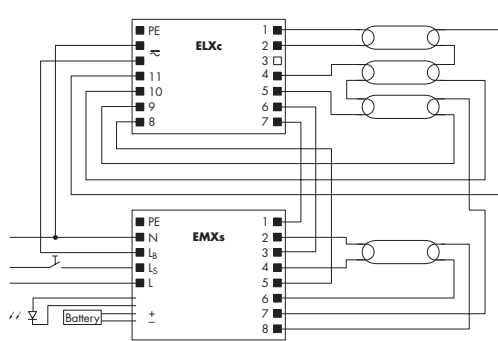

4-lamp operation - Warm start  
with electronic ballast ELXc

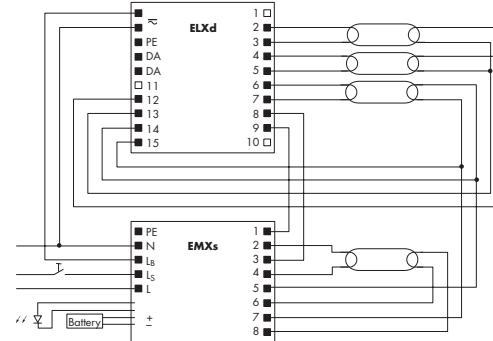

4-lamp operation - Dimming  
with electronic ballast ELXd

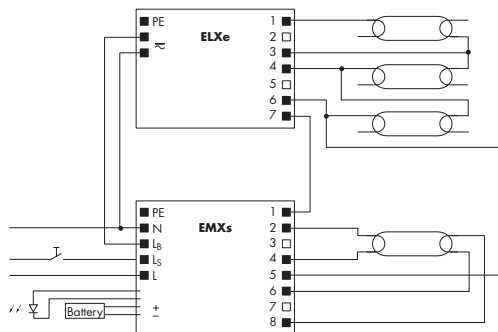

4-lamp operation - Instant start  
with electronic ballast ELXe

1

2

3

4

5

**6**

7


8

9

10



# LIGHTING TECHNOLOGY COMPONENTS FOR THE UL MARKET

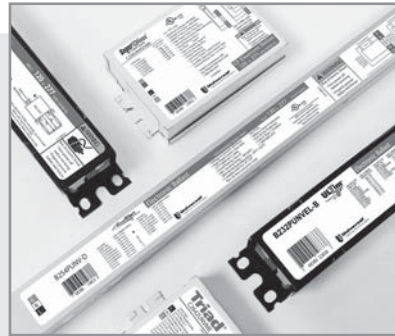

At the beginning of 2010, the US American sales office, Vossloh-Schwabe Inc., was merged with Universal Lighting Technologies, Inc., a further Panasonic subsidiary.

Universal Lighting Technologies, Inc., produces some of the world's most advanced linear fluorescent, compact fluorescent, HID, eHID, and LED solutions for commercial lighting applications.

The following pages serve to give you some idea of the highly extensive product range of VS lampholders for the UL market.

A global leader in research and development since 1947, Universal proudly features recognized and trusted brands like Universal® and Triad®, with a reputation for innovations that can significantly reduce energy costs with high efficiency solutions, installer-friendly options, and greater flexibility for fixture designs.


Advanced lighting technologies such as step-dimming, 0-10 V analog dimming, DALI dimming and energy management systems help meet specific application and user requirements.

The EVERLINE® brand of LED products leads the industry on performance, flexibility and quality. Whether developed individually or to be part of a system, EVERLINE makes it easy to configure a full featured, high efficiency LED system.

Further information can be found at [www.unvlt.com](http://www.unvlt.com).



Nashville, TN 37214  
Phone: 615-316-5100  
[www.unvlt.com](http://www.unvlt.com)

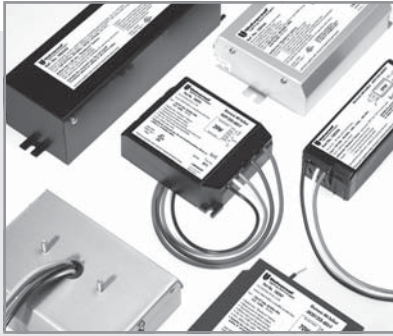


**Energy Management & Controllable Lighting**



**Linear Fluorescent Ballasts**



**Electronic & Magnetic HID Ballasts**

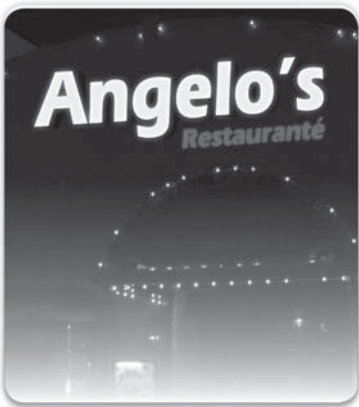

**Sign Ballasts**



**Compact Fluorescent Ballasts**



**LED Systems**

## E39 Porcelain Lampholders

For discharge lamps with base E39 / Mogul base

Screw terminals: max. 16-12 AWG, solid conductor

E39 lampholders

Casing: porcelain, white

Nominal rating: 2000 W/600 V/6 kV pulse rating

Cylindric shape

Screw shell: brass, nickel-plated

Central contact: brass, nickel-plated

Spring loaded central contact

Screw terminals: 18-14 AWG

Fixing distance: 35 mm (1.378")


Thread measured in inches No. 8-32 UNC (ISO)

Weight: 190 g, unit: 50 pcs.

Type: 12870/12876

**Ref. No.: 109014**

**Ref. No.: 109518** with lamp safety catch

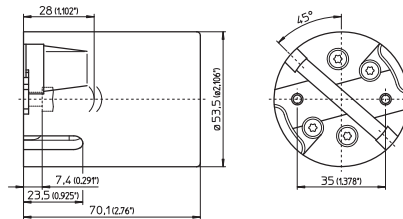

## GU6.5 Lampholders

For single-ended discharge lamps

Additional lead lengths and types on request

GU6.5 lampholders

Casing: ceramic, cover plate: PPS

Nominal rating: 2 A/250 V/5 kV pulse rating

Leads: Cu nickel-plated, stranded conductors 18 AWG,  
PTFE-insulation, length: 305 mm (12")


Weight: 20 g, unit: 100 pcs.

Type: 34515 fixing holes for screws M3 (#4)

**Ref. No.: 534218**

Type: 34516 threaded bushes for screws M3 (#4)

**Ref. No.: 534219**

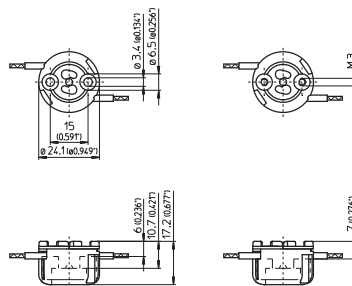

GU6.5 lampholders

Casing: ceramic, cover plate: PPS


Nominal rating: 2 A/250 V/5 kV pulse rating

Leads: Cu nickel-plated, stranded conductors 18 AWG,  
PTFE-insulation, length: 305 mm (12")

Weight: 20 g, unit: 100 pcs.

Type: 34525 dia. 22 mm

**Ref. No.: 535783**

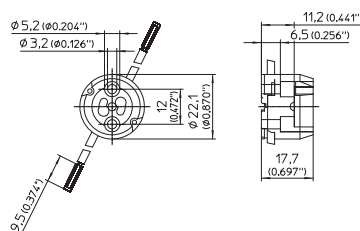

## GX10 Lampholders

### For single-ended discharge lamps

GX10 lampholder

Casing: steatite, cover plate: PPS

Nominal rating: 2/500/5 kV



Leads: Cu nickel-plated, stranded conductors

18AWG, PTFE insulation, length: 305 mm (12")

Weight: 25 g, unit: 100 pcs.

Type: 31550

**Ref. No.: 543153**

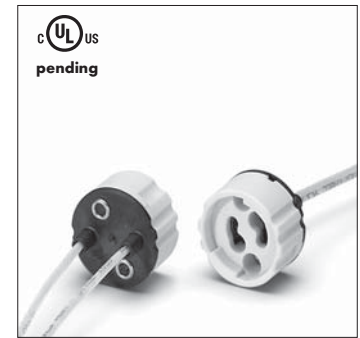

## G12 Lampholders

### For single-ended discharge lamps

Additional lead lengths and types on request

G12 lampholders

Casing: ceramic, cover plate: PPS, black

Nominal rating: 660 W/600 V/5 kV pulse rating

Contacts: Ni

Leads: 18 AWG, SF-2



Fixing holes for screws M4 (#8)

Weight: 56/144 g, unit: 25 pcs.

Type: 31936

**Ref. No.: 108257** lead length: 460 mm (18")

**Ref. No.: 526211** lead length: 1525 mm (60")

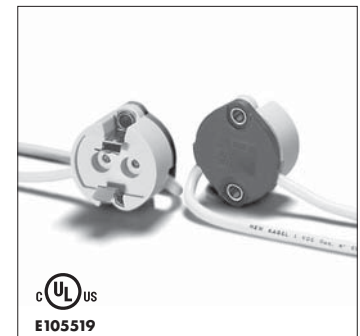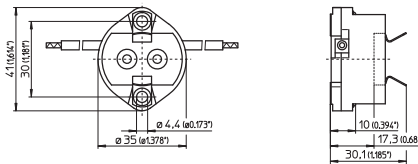

## 2G11 Lampholders for Twin-tube 4-pin Lamps

### For Single-ended Compact Fluorescent Twin-tube 4-pin Lamps

Nominal rating: 660W/600V

Degree of protection: IP20

Quick-connect twin terminals: 18AWG solid or stranded solder-dipped (lamp circuit)

Quick-connect terminals: 18AWG solid or stranded solder-dipped (starter circuit)

All products in this chapter carry a T rating of T120 acc. to UL standards (shunted versions correspond to Circle-I requirements).

2G11 back panel or bracket mount lampholders

Casing: PBT GF, white

Lateral pivots for bracket 105824 (see page 195)

Rear mounting holes for self-tapping #8 screws



Front mounting holes for #4 screws (M3)

Weight: 12.7 g, unit: 500 pcs.

Type: 36051

**Ref. No.: 101489**

**Ref. No.: 532687** with internal shunt



## G24 Lampholders for Quad-tube Lamps, GX24 Lampholders for Triple-tube Lamps

### For Single-ended Compact Fluorescent Bi-pin and 4-pin Lamps

The drawings and photos contained in this chapter only show lampholders for lamps with base G24d-1.

All T ratings in this chapter refer to IEC standards

G24, GX24 snap-in lampholders

Casing: PBT GF, white, T140 (acc. to IEC)

Nominal rating: 660 W/600 V

Quick-connect twin terminals: 18AWG (lamp circuit)

For G24q, GX24q lampholders:

quick-connect terminals: 18AWG (starter circuit)


Rear split pins for wall thickness

0.8-1.7 mm (0.031-0.067")


Width of split pin: 4.5 mm (0.177")

When mounting lampholder remember triple-tube GX24d/GX24q lamps are wider than lampholder.

When using central-mounting hole provisions must be made to prevent lampholder rotation.

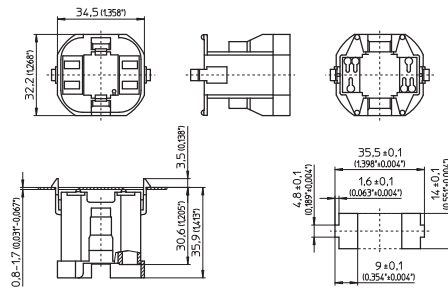

All lampholders with quick-connect terminals (UL File No. E110363): 18AWG solid or stranded solder-dipped

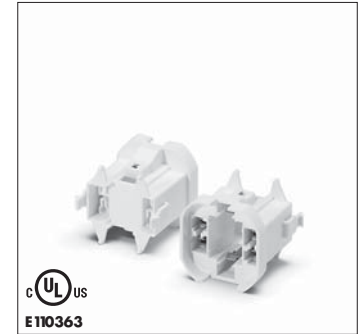

Type	Ref. No.	Base	Output (W)	Weight (g)	Unit (pcs.)
72101	<b>528116</b>	G24d-1/GX24d-1	8, 10, 13 / 13	10.4	500
72102	<b>528117</b>	G24d-2/GX24d-2	18 / 18	10.4	500
72103	<b>528118</b>	G24d-3/GX24d-3	26 / 26	10.4	500
72111	<b>528120</b>	G24q-1/GX24q-1	10, 13 / 13	12.3	500
72112	<b>528121</b>	G24q-2/GX24q-2	18 / 18	12.3	500
72113	<b>528122</b>	G24q-3/GX24q-3	26 / 26, 32	12.3	500
72119	<b>528126</b>	GX24q-3/-4*	26, 32 / 42	12.3	500
72114	<b>528123</b>	GX24q-4	42	12.3	500
72115	<b>528124</b>	GX24q-5	57	12.9	500
72116	<b>528125</b>	GX24q-6	70	12.9	500

#### Shunted Version

72111	<b>528128</b>	G24q-1/GX24q-1	10, 13 / 13	12.3	500
72112	<b>528129</b>	G24q-2/GX24q-2	18 / 18	12.3	500
72113	<b>528130</b>	G24q-3/GX24q-3	26 / 26, 32	12.3	500
72119	<b>528134</b>	GX24q-3/-4*	26, 32 / 42	12.3	500
72114	<b>528131</b>	GX24q-4	42	12.3	500
72115	<b>528132</b>	GX24q-5	57	12.9	500
72116	<b>528133</b>	GX24q-6	70	12.9	500

\* Lampholders 528126 and 528134 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42W.

# G13 Push-through Lampholders for T8, T12 Lamps

## Lampholders for fluorescent lamps T8 and T12 / Medium Bi-Pin

Nominal rating: 660 W/600 V  
 Push-in twin terminals: 18 AWG, solid or stranded conductors, tinned  
 Lateral fixing clips for wall thickness 0.4-2 mm (0.016"-0.079")

Casing: PC, white  
 (shunted versions: PBT, white)  
 Front plate: PBT GF, white


All products in this chapter carry a T rating of T120 acc. to UL standards (shunted versions correspond to Circle-I requirements).

G13 push-through lampholders for lamps T8, T12

Pin support for reliable contact  
 Lamp axis: 17 mm (0.67")

Weight: 5,4 g, unit: 1000 pcs.  
 Type: 26300/26302 with stop

- Ref. No.: 5512271**
- Ref. No.: 551275** internally shunted
- Type: 26310/26312 without stop
- Ref. No.: 551272**
- Ref. No.: 551277** internally shunted

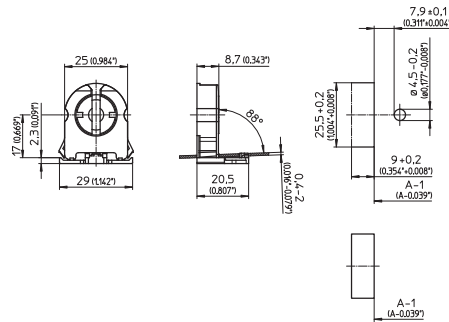


G13 push-through lampholders for lamps T8, T12

Pin support for reliable contact  
 Lamp axis: 23 mm (0.906")

Weight: 6.6 g, unit: 1000 pcs.  
 Type: 29100/29125 with stop

- Ref. No.: 545845**
- Ref. No.: 545840** internally shunted
- Type: 29101/29126 without stop
- Ref. No.: 545849**
- Ref. No.: 545842** internally shunted

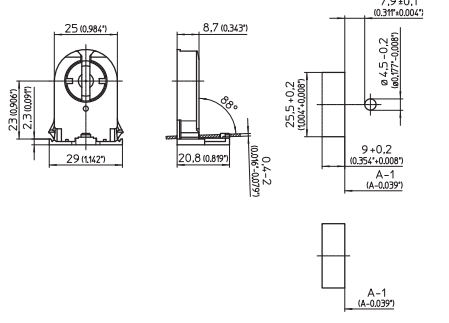


G13 push-through lampholders for lamps T8, T12

Pin support for reliable contact  
 Lamp axis: 31 mm (1.220")

Weight: 7.8 g, unit: 1000 pcs.  
 Type: 28700/28725 with stop

- Ref. No.: 109342**
- Ref. No.: 109376** internally shunted
- Type: 28701/28726 without stop
- Ref. No.: 109343**
- Ref. No.: 109377** internally shunted

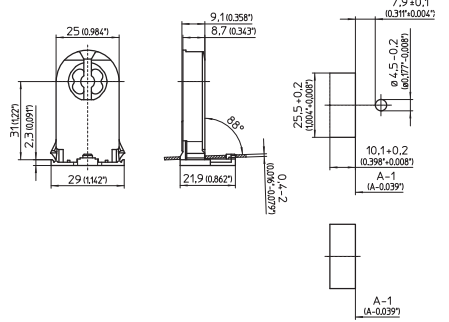

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10




## G5 Lampholders

### Lampholders for fluorescent lamps with base G5

Nominal rating: 120 W/600 V  
 Push-in twin terminals: 18 AWG, solid or stranded conductors, tinned  
 Lateral fixing clips for wall thickness 0.5-1.5 mm (0.020" -0.059")


G5 push-through lampholders  
 Lamp axis: 20 mm (0.787")  
 Casing: PBT GF/PC, white, rotor: PBT GF, white  
 Weight: 4.1 g, unit: 1000 pcs.  
 Type: 09432/09433

**Ref. No.: 545933** with stop  
**Ref. No.: 545935** without stop

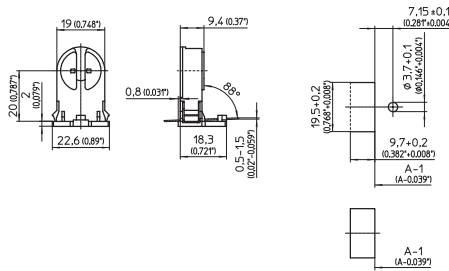


G5 push-through lampholders  
 Lamp axis: 25 mm (0.984")  
 Casing: PBT GF/PC, white, rotor: PBT GF, white  
 T140, nominal rating: 2/500  
 Weight: 4.5 g, unit: 1000 pcs.  
 Type: 09434/09435

**Ref. No.: 545937** with stop  
**Ref. No.: 545939** without stop

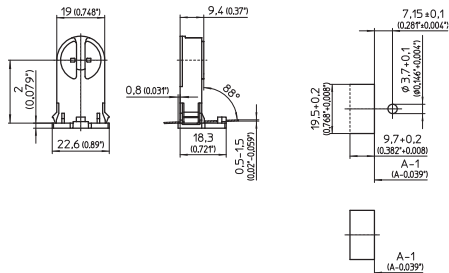

G5 push-through lampholders  
 Lamp axis: 15 mm (0.591")  
 Casing: PBT GF/PC, white, rotor: PBT GF, white  
 Weight: 3.5 g, unit: 1000 pcs.  
 Type: 09420/09421

**Ref. No.: 505737** with stop  
**Ref. No.: 505739** without stop

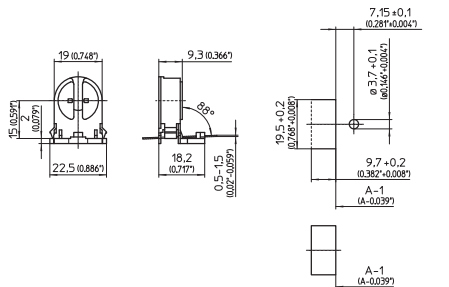

1

2

3

4

5

6

**7**

8

9

10



## 8

## General Technical Details

### **General technical details**

Product development and product certification	395-396
CE mark	396-397
Climate and environmental protection	398
Protection classes of luminaires and operating devices	399
Operating devices with double or reinforced insulation for installation in protection class II luminaires	399
Protection classes of luminaires and operating devices	400
Selection of components, materials and dimensions	400-401
Impulse voltage categories for lampholders	401
Torque to be applied to screws	401

### **Glossary**

**402-404**

## Product development and product certification

The increasingly converging world and the global markets that are being created are both placing new design demands on the sector and its technologies. Against this background, standardisation – both on a regional and international scale – is becoming more and more important in positioning new technologies and innovations on the market. Standardisation ensures the necessary degree of safety, reliability, exchangeability and cost-effectiveness.

Vossloh-Schwabe products have been developed and produced on the basis of technical innovations, internationally and regionally applicable standards and valid environmental regulations for more than 90 years. In this respect, we already take account of integrated components and materials, production methods and technologies, comprehensive environmental aspects as well as a product's energy efficiency during the development phase. An important entrepreneurial goal in all these years has been and continues to be to create lighting components that satisfy the requirements of our customers with regard to safety, function, longevity and cost-effectiveness.

In addition to observing valid, state-of-the-art standards, we also take consideration of the recommendations of industrial associations when developing new products.

Our cooperation in national and international committees ensures we receive early information about new or changed regulations and thus helps to guarantee future-orientated products.

In addition to undergoing internal production approval tests, mass-produced devices are also submitted to national and international testing institutes for certification. The applicable testing and assessment regulations of the testing institutes are subject to international variation. The marks of conformity shown here are therefore not valid for all the products featured in the catalogue. You will find an overview of the approval marks for the products presented in the catalogue from page 405 on. On request, we will gladly provide information about all of the existing approvals. You can also find test certificates in our online catalogue at


[www.vossloh-schwabe.com](http://www.vossloh-schwabe.com).

As the international IEC (International Electrotechnical Commission) standards for lighting technology are also adopted by the European Institute for Standardisation CENELEC (Comité Européen de Normalisation Electrotechnique), the European standards (EN) therefore contain the same requirements. In rare cases, national deviations are permitted. The certification (third-party testing) of VS catalogue products in accordance with EN standards is documented by the ENEC mark.

The ENEC mark (European Norms of Electrical Certification) was created in Europe as a uniform certification mark for electrotechnical products. The ENEC Agreement currently governs the following product groups:

- luminaires
- luminaire components
- energy-saving lamps
- IT equipment
- connection terminals, clips
- capacitors
- couplers
- switches for household appliances
- noise filters
- safety transformers
- tools
- consumer electronic
- batteries
- domestic appliance
- mobile tools
- IT products

There are plans to include further electrical equipment in the ENEC Agreement.



The certification of products is also expanded to include non-European manufacturers. However, certification testing for lighting equipment must be carried out by an ENEC testing institute in Europe.

At present, a total of 24 testing houses in 20 countries are signatories of the ENEC agreement (see table). Obtaining an ENEC mark for luminaire components like ballasts and ignitors also includes having the product assessed in accordance with the standards governing safety and function. Certification must be based on the EN standards listed in the Agreement. The mark documents that the product not only complies with the applicable standards, but also that ongoing production is monitored by inspectors from a testing institute and that the manufacturer operates an effective quality assurance system in accordance with the ISO 9000 standard suite (International Standards Organisation). ISO deals with the standardisation of non-electrotechnical products.

The ENEC mark is displayed with the identification number and often the logo of the testing institute, as follows:

Identification No.	Testing Institute	Identification No.	Testing Institute
01	AENOR - Spain	15	UL Int'l DEMKO - Denmark
02	SGS - Belgium	16	SGS Fimko - Finland
03	IMQ - Italy	17	NEMKO - Norway
04	CERTIF - Portugal	18	TRI MEEI - Hungary
05	DEKRA - Netherlands	19	ITCL - United Kingdom
08	LCIE - France	21	EZÚ - Czech Republic
09	ELOT - Greece	22	SIQ - Slovenia
10	VDE - Germany	23	TSE - Turkey
11	ÖVE - Austria	24	TRLPTÜV - Germany
12	BSI - United Kingdom	25	TÜV SÜD PS - Germany
13	Electrosuisse - Switzerland	28	SEP - BBJ - Poland
14	Intertek SEMKO - Sweden	30	PREDOM - OBR - Poland

Apart from a product's safety and performance certification, a further useful selection aid is to have a product's electromagnetic compatibility (EMC) tested by an independent test institute, particularly in the case of electronic ballasts. If the product passes the EMC test, an additional test mark is awarded, for instance the VDE EMC mark of the VDE test and certification institute in Offenbach. The EMC certifications for control gears are helpful for the EMC luminaire certification and could reduce time and cost for the luminaire certification.

## CE mark

EC Directives form the basis for a common European domestic market without any trade restrictions. Any products that are destined for the European market have to meet the requirements of all directives that apply to the product in question. Compliance with the directives is documented by the CE mark on the product or in the technical documents.

This CE mark is therefore not a mark of compliance with standards (test certificate) of a testing institute, like the ENEC mark is, and can therefore not be issued by a testing institute. The CE mark must be printed on the product, the packaging or both and is not directed at the consumer, but at supervisory authorities.



The following table contains a list of key EC Directives governing lighting:

<b>1194/2012/EG</b>	Ecodesign requirements for directional lamps, light emitting diode lamps and related equipment
<b>874/2012/EG</b>	Energy labelling of electrical lamps and luminaires
<b>347/2010/EG</b>	Ecodesign requirements for fluorescent lamps without an integrated ballast, for high intensity discharge lamps, and for ballasts and luminaires able to operate such lamps
<b>2010/30/EG</b>	Indication by labelling and standard product information of the consumption of energy and other resources by energy-related products (this directive supersedes directive 98/11/EC)
<b>859/2009/EG</b>	Ecodesign requirements on ultraviolet radiation of non-directional household lamps
<b>245/2009/EG</b>	Definition of eco-design requirements regarding fluorescent lamps without an integrated ballast, high-pressure discharge lamps as well as ballasts and luminaires in their operation and the invalidation of Directive 2000/55/EC of the European Parliament and Council.
<b>244/2009/EG</b>	Definition of eco-design requirements regarding household lamps with non-directional light.
<b>2009/125/EG</b>	Setting of ecodesign requirements for energy-related products (ErP). This directive supersedes directive 2005/32/EC. The new directive was extended and now includes all energy-consuming products. Regulations 244 and 245 remain unaffected by this change.
<b>1907/2006/EG</b>	Specifications governing the registration, evaluation, authorisation and description of chemicals: REACH ( <b>R</b> egistration, <b>E</b> valuation, <b>A</b> uthorisation and <b>R</b> estriction of <b>C</b> hemical Substances) plus amending regulations; e.g. 348/2013/EC, latest amendment of the REACH regulation
<b>2006/95/EG</b>	Electrical equipment designed for use within certain voltage limits (Low Voltage Directive).
<b>2006/32/EG</b>	Energy end-use efficiency and energy services – ES Directive (Energy Service); national laws must take effect by 17.05.2008.
<b>2006/25/EG</b>	Directive on the minimum health and safety requirements regarding the exposure of workers arising from physical agents (artificial optical radiation)
<b>2005/32/EG</b>	Eco-design requirements for energy-using products – EuP directive (Energy using Products).
<b>2005/20/EG</b>	Directive regarding packaging
<b>2004/108/EG</b>	Directive on the approximation of the laws of the Member States relating to electromagnetic compatibility; national laws had to take effect by 20.01.2007. Applicable to new products since 20.07.2007.
<b>2004/40/EG</b>	Directive on the minimum health and safety requirements regarding the exposure to the risks arising from physical agents (electromagnetic fields)
<b>2004/12/EG</b>	Directive on packaging
<b>2003/66/EG</b>	Directive on energy labelling of household electrical refrigerators, freezers and lamps
<b>2002/96/EG</b>	Old electrical and electronic devices; effective since 13.08.2005; does not fall under the CE mark directive
<b>2002/91/EG</b>	Total energy efficiency of buildings; effective since 04.01.2006; does not fall under the CE mark directive
<b>2001/95/EG</b>	Directive on general product safety
<b>1998/11/EG</b>	Energy rating of household lamps; effective since 14.06.1999
<b>1994/62/EG</b>	Directive on packaging
<b>93/68/EWG</b>	CE marking directive

Manufacturers are obliged to keep conformity declarations as well as test and production documentation ready for presentation.

The documents must be retained for a period of 10 years after the product was last marketed.

Vossloh-Schwabe operating devices all bear the CE mark; the respective conformity declaration and production documentation are available for inspection. As a consequence, all luminaires that are equipped with properly installed VS components and for which the assembly instructions were observed meet the legal requirements.

1

2

3

4

5

6

7

8

9

10

## Climate and environmental protection

The European Union adopted a number of EU Directives that are designed to reduce the CO<sub>2</sub> output. Essentially, these objectives can be grouped into three categories:

- requirements placed on new products,
- requirements placed on buildings and
- revision of existing installations.

The requirements placed on new products are governed by the **ErP framework directive** (**E**nergy-related **P**roducts) together with the so-called implementation directives, which envisage the setting of special energy requirements for lamps (minimum lm/W requirements), operating devices (minimum efficiency ratings) and luminaires (minimum energy efficiency requirements) for all lighting technologies. The directive on energy efficiency requirements regarding ballasts for fluorescent lamps is integrated into the implementation directives.

The requirements for buildings (**EPBD: E**nergy **P**erformance of **B**uildings) are specify targets for the maximum permissible primary output of lighting. In so doing, a calculation method is employed that will stipulate the permissible maximum electrical output values of the lighting system using a reference procedure.

With regard to the revision of existing installations the EU member states are called upon to set up national action plans (**Energy Service Directive**) that show which measures can be used to achieve the targeted CO<sub>2</sub> reductions.

In addition to the climate protection requirements, a number of directives were also produced to cover waste reduction and recycling, specifically the **WEEE** (**W**aste of **E**lectrical and **E**lectronic **E**quipment) and **RoHS** (**R**estriction of the use of certain **H**azardous **S**ubstances) directives. These directives regulate the disposal and reduction of waste and the use of hazardous substances.

As a result of the REACH system (**R**egistration, **E**valuation, **A**uthorisation and Restriction of **C**hemical Substances) only registered chemical substances can now be brought onto the market. The principle is: no data, no market.

As operating devices and lampholders are constituent parts of luminaires, these components are to be disposed of along with the luminaire; separate disposal is not provided for.

## Protection classes of luminaires and operating devices

The electric shock protection that luminaires and control gears are fitted with provides dual protection, which prevents any danger in the event of a technical defect. With regard to safety, the simultaneous occurrence of two errors can be taken into account in certain circumstances, e.g. given a street luminaire with two lamp casings, one of which is used to house the ballast that operates the lamp. This also applies to low-voltage LED lighting systems.

Luminaires and operating devices of **protection class I** provide protection against electrical shock solely using the base insulation and the safe connection of all exposed conductive parts to an earth conductor. Thus, should the base insulation fail, no exposed conductive parts can become live.

Luminaires and operating devices of **protection class II** provide protection against electrical shock using both the base insulation and an additional or reinforced insulation. Protection class II products do not feature a connection to a protective earth conductor. The mounting conditions do not ensure any additional degree of protection, either.

In special cases with Protection Class II luminaires, it can be permissible to connect a protective conductor or a function protection conductor, as follows:

- **for EMC reasons** – in such cases, it can be necessary to connect a function protection conductor to remain within EMC limiting values. The component manufacturer's specifications regarding the individual operating devices must be observed during the construction of the luminaire. If an operating device is marked as containing a function protection conductor, the creepage and air clearance distances of the operating device connection must comply with the requirements of protection class II (reinforced or additional insulation);
- **as an ignition aid for lamps** – connecting a function protection conductor can be necessary as a capacitive ignition aid for lamps. In such cases the creepage and air clearance distances around the ignition aid within the luminaire and the function protection conductor connection terminal have to comply with the requirements of protection class II (reinforced or additional insulation). The ignition behaviour of a lamp should be agreed with the manufacturer in these cases;
- **when wiring the protective conductor** from the luminaire to another device. This is an installation point of the protective conductor and creepage and air clearances must comply with the respective requirements laid down in the luminaire standard as well as any requirements regarding reinforced or additional insulation. Functional earth connections of control gear or Protection Class II luminaires must always feature double or reinforced insulation since no technical safety requirements exist for functional earths.

## Operating devices with double or reinforced insulation for installation in protection class II luminaires

Protection class II specifications have to be met by the luminaire along with its installed operating device. Both protection class I and class II ballasts can be installed. The design of the luminaire must be adapted to suit. This means that if a protection class I ballast is installed in a protection class II luminaire, the design of the luminaire has to be correspondingly sophisticated to ensure the creepage and air clearance distances can be met. On the other hand, using a protection class II ballast, only available as an independent ballast nowadays, will in most cases result in a need for too much technical effort and thus in high costs. Against this background, the standards contain special requirements for ballasts destined for installation in protection class II luminaires.

These "**double or reinforced insulation ballasts**" and respective protection class II lampholders permit technically and cost-effective construction of protection class II luminaires.

**Protection class III** luminaires provide protection against electrical shock by using Safety Extra Low Voltage (SELV). Luminaires of protection class III are not permitted to generate higher voltages than the Safety Extra Low Voltage (SELV).



Connection terminal for the protective earth conductor  
Protection class I



Connection of the function protection conductor  
(will drop in future)



General symbol for an earth connection



Protection class II

1

2

3

4

5

6

7

8

9

10



Ballasts with double or reinforced insulation



Protection class III

## Protection classes of luminaires and operating devices

IEC 60529 (EN 60529) defines protection classes for enclosures of casings. The IP Code (International Protection Code) describes the level of protection provided against accidental contact and penetration by foreign bodies as well as protection against water. The first number stands for protection against foreign bodies, the second stands for protection against water. These specifications are important with particular regard to built-in or mounted luminaires as the provisions governing protection against accidental contact provide the basis for the insulation system for components and conductors (also see luminaire standard EN 60598-1).

To comply with the IP requirements, the installation instructions supplied by the luminaire and/or operating device manufacturer(s) must be observed.

Number	1st Number		2nd Number
	Protection against contact	Protection against foreign bodies	Protection against water
0	No protection	No protection	No protection
1	Protected against contact with the back of the hand	Protected against solid foreign bodies $\varnothing \geq 50$ mm	Protected against vertically dripping water
2	Protected against finger contact	Protected against solid foreign bodies $\varnothing \geq 12$ mm	Protected against diagonally dripping water (angle of $15^\circ$ from above)
3	Protected against contact with tools	Protected against solid foreign bodies $\varnothing \geq 2.5$ mm	Protected against diagonal water spray up to an angle of $60^\circ$ from above
4	Protected against contact with wire	Protected against solid foreign bodies $\varnothing \geq 1$ mm	Protected against water splashes from any direction
5	Protected against contact with wire	Protected against dust	Protected against jets of water
6	Protected against contact with wire	Dust-tight	Protected against strong jets of water
7	-	-	Protected against temporary immersion in water
8	-	-	Protected against permanent submersion in water. Specific testing conditions must be agreed, especially with regard to high-pressure cleaning equipment.
9	-	-	For high-pressure cleaning IPx9 in accordance with DIN 4005

If any components like ballasts or conductors of built-in or mounted luminaires (e.g. wall-mounted luminaires) are accessible to accidental contact, they must comply with the requirements of the two safety levels stipulated for these components. Luminaire construction must be in line with these conditions, which can mean that, for instance, conductors have to feature additional or reinforced insulation.

For lampholders the compliance with the two safety levels is proved by conducting a special voltage test.

European standard EN 50102 "Degrees of protection provided by enclosures for electrical equipment against external mechanical impacts (IK code)" introduces an IK code, analogous to the IP degree of protection of electrical control gear, that was also adopted as a national standard in France, e.g. with the French standard NF EN 50102. Testing is carried out using a pendulum hammer that, in accordance with the IK code, must be dropped from a certain height with respective weights attached to exert the specified impact energy. The table details impact energy values for luminaires (IK00 to IK10).

IK Code	Energy Nm or Joule	IK Code	Energy Nm or Joule
IK00	0.0	IK06	1
IK01	0.14	IK07	2
IK02	0.2	IK08	5
IK03	0.35	IK09	10
IK04	0.5	IK10	20
IK05	0.7		

## Selection of components, materials and dimensions

The documentation provided by Vossloh-Schwabe is carefully researched. Technical advice is given to the best of our knowledge. The details on the product or the type plate are binding in every case.

Any manipulation of VS products or product packaging is illegal and violates registered trademark rights. Manipulations can negatively influence or destroy technical properties and can possibly result in secondary damage. Vossloh-Schwabe does not accept any liability for manipulated products and cannot be held responsible for any secondary damage.

Manufacturers of luminaires and lighting systems remain responsible for the selection of suitable luminaire components, e.g. operating devices and lampholders, and component materials just as for their safe and correct installation in line with luminaire and system set-up regulations.

Particular attention should be paid to the following:

- temperature measurements and temperature limits
- compliance with creepage and air clearance distances and insulation thicknesses
- selection of components to suit their operating conditions and degree of strain (e.g. voltage, current, mechanical loading, UV radiation)
- protection against contact and safe protective earth conductor connections
- resistance to corrosion

The product drawings without tolerances are contained in this catalogue only feature nominal dimensions. For space and simplicity reasons, the full dimensions and particularly the associated tolerances cannot be shown. For detailed information resp. details of luminaire design, please request our in-depth dimensional assembly drawings.

All VS products comply with the relevant standards and are developed and produced using the latest technological expertise.

To ensure safe luminaire production we do not recommend reusing dismantled lampholders.

## Impulse voltage categories for lampholders

Lampholder	Standard	Impulse voltage category
E14: 250 V / 2 A	IEC 60238 / VDE 0616-1	2
E27: 250/500 V / 4 A		2
E40		2
Starters: 250 V / 2 A	IEC 60400 / VDE 0616-3	2
Fluorescent lamps 250 V / 500 V / 2 A	IEC 60400 / VDE 0616-3	2
Halogen lamps and other lamps	IEC 60838-1 / VDE 0616-5	2
Bayonet fitting	IEC 61184 / VDE 0616-2	2

## Torques for screws

With regard to lampholders secured with screws, we recommend using a torque of around 80% of the value stipulated in DIN EN 60598-1

Nominal diameter of the screw's outside thread mm	Torque (Nm) for screws with a head in acc. with DIN EN 60598-1
to 2.8	0.40
< 2.8 to 3.0	0.50
< 3.0 to 3.2	0.60
< 3.2 to 3.5	0.80
< 3.6 to 4.1	1.20
< 4.1 to 4.7	1.80
< 4.7 to 5.3	2.00
< 5.3 to 6.0	2.50

1

2

3

4

5

6

7

8

9

10



<b>A</b>	<b>A type, B type capacitors</b>	The requirements of the safety standard for capacitors differentiates between capacitor types; A type capacitors stand for plastic can capacitors; B type capacitors stand for aluminium can capacitors.
	<b>AG DALI</b>	International working group under the umbrella of ZVEI (the German Electrical and Electronic Manufacturers' Association) in support of DALI (Digital Addressable Lighting Interface).
	<b>Analogue interface 1–10 V</b>	Bipolar interface of dimmable operating devices with a built-in constant current source.
	<b>Average service life</b>	Specified service life of electronic operating devices with a failure rate per unit of time.
<b>B</b>	<b>Ballast</b>	Device that is connected in between the voltage supply and one or more discharge lamps and serves the purpose of igniting the lamps and limiting lamp current during operation.
	<b>Ballast-Lumen Factor (luminous flux factor of a ballast)</b>	The ratio of luminous flux emitted by a reference lamp when operated with a particular production ballast to the luminous flux emitted by the same lamp when operated with its reference ballast.
<b>C</b>	<b>Capacitive circuit (series compensation)</b>	Circuit of an inductive ballast with a capacitor connected in series.
	<b>CE Mark</b>	European regulation governing all products that are introduced to the market. Products must comply with the respective EC directives.
	<b>CELMA</b>	Association of European component and luminaire manufacturers (Committee of E.E.C. Luminaires Components Manufacturers Associations).
	<b>CENELEC</b>	European committee for electronic standardisation (Comité Européen de Normalisation Electrotechnique).
	<b>CISPR</b>	International special commission for radio interference (Comité International Spécial des Perturbations Radioélectriques).
	<b>Colour rendering index (CRI) <math>R_a</math></b>	Index to determine the degree of deviation from a viewed body colour (with 8 standardised test colours) under a given type of lighting. $R_a = 100$ denotes a light source that causes no distortion of any colour. Lower $R_a$ values denote light sources with less positive colour rendition properties.
	<b>Compensated circuit (parallel compensation)</b>	Circuit of an inductive ballast with a capacitor between phase and neutral conductor.
	<b>Compensation capacitors</b>	The power factor can be increased to a value of 0.9–0.98 by using compensation capacitors.
	<b>Conformity declaration</b>	Documentation for an operating device or a luminaire regarding compliance with European directives; this documentation is for submission to national supervisory authorities (e.g. regulation authority for telecommunications and post (Reg. TP) or trade supervisory authorities).
	<b>Convertors</b>	Electronic convertor (electronic conversion of mains voltage in extra-low voltage) to generate operating voltage for low-voltage halogen lamps.
	<b>Creepage and air clearance distances</b>	Regulation minimum distances between voltage-carrying components of different polarity or between voltage-carrying components and the accessible casing surfaces (air clearance: shortest distance through air; creepage distance: shortest distance across a surface).
	<b>Cross discharge</b>	Discharge in the lamp electrode region during preheating.
<b>D</b>	<b>DALI</b>	Digital interface for controlling dimmable electronic operating devices (Digital Addressable Lighting Interface).
	<b><math>\Delta t</math></b>	Increase in the winding temperature during the operation of a ballast (the ballast is mounted on 75 mm high wooden blocks and its temperature is measured at an ambient temperature of 25 °C).
	<b><math>\Delta t_{an}</math></b>	Temperature increase during short-circuit operation (e.g. defective starter, defective lamp).
	<b>DIAL</b>	German institute for applied lighting technology (Deutsches Institut für Angewandte Lichttechnik, Lüdenscheid, Germany).
	<b>DKE</b>	German electrotechnical commission of the DIN and VDE.
	<b>Driver</b>	Name commonly given to ballasts used for operating LED modules.
<b>E</b>	<b>EC directives</b>	Regulations (laws) of the European Community that have to be transposed into national laws within a prescribed period of time.
	<b>Efficiency</b>	Ratio of power output in relation to power input.
	<b>ELC</b>	European Lamp Companies Federation
	<b>EMC</b>	Electromagnetic compatibility
	<b>EMF</b>	Electromagnetic fields
	<b>ENEC agreement</b>	Agreement between the European testing institutes for issuing the European test mark.
	<b>ENEC mark</b>	Marking for a device that complies with the European standards and that was tested by a testing institute that is a part of the ENEC agreement (European Norms of Electrical Certification).
	<b>Energy classification EEI</b>	CELMA system to determine energy classes for ballasts for fluorescent lamps (Energy Efficiency Index).
	<b>Error current</b>	Current that is caused by a fault in the insulation of a device or via creepage or air clearance distances.
	<b>Error current protection switch</b>	Evaluates the magnitude of the error current and switches the circuit off if a predefined maximum value is reached.
<b>F</b>	<b>Feed-through of mains voltage</b>	The possibility of connecting two lamps to a single terminal so that an electrical connection can be made to another device.
	<b>FELV</b>	Functional extra-low voltage without adequate protection from accidental contact with higher voltages in other parts of the same circuit.
	<b>FEP capacitors</b>	Flame- and explosion-proof capacitors with a contact breaker.
	<b>FGL</b>	Promotion Society for Good Lighting (Fördergemeinschaft Gutes Licht – ZVEI).
	<b>Function protection conductor</b>	It may be necessary to connect a "function protection conductor" to ensure compliance with the EMC requirements or as a starting aid for lamps; VS operating devices are suitably marked.

<b>I IDC terminal (ALF terminal)</b>	IDC-type connection terminal (Insulation Displacement Connection) for automatic luminaire fabrication (ALF terminal).
<b>IEC</b>	International Electrotechnical Commission
<b>ILCOS lamp designation system</b>	International IEC marking system for lamps.
<b>Illuminance <math>E_v</math></b>	Illuminance ( $E_v$ ) is the total luminous flux ( $\Phi$ ) incident on a horizontal, vertical or angled illuminated surface (per unit area). The unit is lux [ $lx=lm/m^2$ ], with luminous flux in [lm] and area in [ $m^2$ ]. Illuminance $E_v$ forms the basis for all lighting calculations and designs.
<b>Impedance</b>	Impedance is a conductor's apparent resistance to an alternating current.
<b>IMQ</b>	Italian institute for quality marking; at the same time, the mark of conformity with standards (Istituto Italiano del Marchio di Qualità).
<b>Independent lamp operation</b>	Possibility of operating a single lamp with a multi-lamp operating device after the other lamps have failed.
<b>Independent operating device</b>	Operating device that does not have to be installed in a casing; the safety regulations are fulfilled by the operating device itself.
<b>Inductance</b>	Inductance establishes the connection between the current and the magnetic flux caused by it in a conductor arrangement after taking account of all design and material fluctuations.
<b>Inductive circuit</b>	Operation of a fluorescent lamp with a ballast without a capacitor.
<b>Interference</b>	Interference signals emitted by operating devices via the mains voltage or the air.
<b>Interference immunity</b>	Property of an operating device to remain fully functional despite interference emitted by other operating devices.
<b>IP numbers</b>	Code system for marking the protection level of an operating device or a luminaire against moisture or foreign bodies entering (the first figure stands for foreign bodies and the second for moisture).
<b>IPP technology</b>	Generating the ignition voltage required for high-pressure lamps using the special intelligent pulse pause technology.
<b>L LBS lamp designation System</b>	Marking system for lamps, established for Europe.
<b>Leak current</b>	Current of an operating device or a luminaire that is discharged via the potential compensation conductor (earth conductor).
<b>LED (light emitting diode)</b>	Solid state device embodying a p-n junction, emitting optical radiation when excited by an electric current.
<b>LED light engine</b>	Functional unit consisting of an LED module and control gear. The LED light module and the control gear can be used separately in two different casings or combined as a single unit.
<b>LED module</b>	Unit supplied as a light source. In addition to one or more LED's it may contain other components, e.g. optical, electrical, mechanical and/or electronic.
<b>Light colour</b>	Perceived colour of the light radiated by a lamp.
<b>LightingEurope</b>	An industry association consisting of European lamp, component and luminaire manufacturers as well as national lighting associations in Europe. LightingEurope is the successor organisation of CELMA and ELC (European Lamp Companies). LightingEurope represents the interests of the European lighting industry.
<b>Light intensity distribution curve</b>	Represents the spatial distribution of the light intensity of light sources.
<b>LiTG</b>	German Association for Lighting Technology (Deutsche Lichttechnische Gesellschaft)
<b>Luminance L</b>	Luminance L is the luminous intensity density of an area that emits or reflects light with a certain emission angle. The unit of luminance L is [ $cd/m^2$ ] and is the photo-technical measure that corresponds to the subjective perception of the level of brightness of a light source or an object, while luminous flux $\Phi$ , luminous intensity I and illuminance E are not visible, i.e. not sensed by the human eye. Light only becomes visible when it hits an object that it is either reflected by or penetrates in a diffused manner. Objects of different levels of brightness therefore only seem to be darker or brighter at same illuminance because they reflect the light differently.
<b>Luminous efficiency / efficiency</b>	Ratio of luminous flux to power input ( $lm/W$ ).
<b>Luminous flux <math>\Phi</math> (photon radiation)</b>	Luminous flux $\Phi$ is the radiated/emitted light power in lumen [lm] of a light source, a unit of measurement for the number of light photons emitted in all directions. Luminous flux is the photometrical light output perceived by the human eye.
<b>Luminous intensity I</b>	Luminous intensity I in [cd] is decisive for characterising of a source of light and is defined as a quotient of the emitted luminous flux $\Phi$ and the radiated area of the solid angle $\Omega$ . Luminous intensity I is thus the focused luminous flux $\Phi$ within the radiated solid angle $\Omega$ . Today's LEDs can reach a luminous intensity of more than $I=10$ cd. The luminous intensity value depends on the viewing angle, i.e. the luminous intensity of an LED chip in a $30^\circ$ reflector will be higher than that of an identical LED chip in a $60^\circ$ reflector. This is because a $60^\circ$ reflector results in the same luminous flux $\Phi$ having to illuminate a larger area.
<b>M Mains harmonics</b>	Mains current distortions by higher-frequency currents.
<b>Master/slave circuit</b>	Operating several lamps in different luminaires with one ballast.
<b><math>\mu F</math></b>	Unit of capacitance (microfarad)
<b>MPP capacitors</b>	Metallised polypropylene film dielectric capacitors.
<b>P Parallel-compensated circuits</b>	Circuit of an inductive ballast with a capacitor between phase and neutral conductor (connected in parallel to the lamp circuit).
<b>Part load range</b>	Variable load range up to the maximum rated load.
<b>PELV</b>	Protective extra-low voltage with adequate protection from accidental contact with higher voltages in other parts of the same circuit.
<b>Phase-cutting leading-edge control</b>	In accordance with the defined angle, voltage regions are suppressed of the positive and negative sinusoidal oscillations of the mains voltage in an upwards direction starting with the voltage zero crossing.
<b>Pinch temperature</b>	This is measured at a defined point of the lamp base; the permissible maximum values are internationally determined.
<b>Polyester resin impregnation</b>	High-grade vacuum impregnation with polyester resin.
<b>Power factor</b>	Ratio of true power to apparent power (total power). $\lambda$ (lambda) expresses the power factor for non-sinusoidal currents and voltages. In contrast, $\cos \phi$ (phi) expresses the power factor for sinusoidal currents or voltages.
<b>Pulse Ignition</b>	Generation of the ignition voltage for high-pressure lamps with the help of ballasts (ballast insulation must match the ignition voltage).
<b>PUSH</b>	Key-operated bipolar interface of VS electronic ballasts for controlling the brightness of connected lamps.

1

2

3

4

5

6

7

8

9

10

<b>R Reference ballast</b>	Special ballast that is either inductive for lamps operated with mains voltage or ohmic for lamps operated at high frequencies. Reference ballasts are designed to deliver comparable values for testing ballasts, selecting reference lamps and testing mass-produced lamps under standardised conditions.
<b>Reference lamp</b>	When used in combination with a suitable reference ballast, reference lamps provide key electrical data that are close to the target values laid down in the lamp standards.
<b>S Safety transformer</b>	Isolation transformer for supplying circuits with safety extra-low voltages.
<b>SELV</b>	Safety extra-low voltage.
<b>Short-circuit-proof</b>	Short-circuit-proof operating devices do not pose a safety risk if a short-circuit occurs at the output of the operating device; a difference is made between operating devices offering limited and unlimited protection against short-circuit; in the case of operating devices with limited short-circuit protection, an additional mechanism has to be installed.
<b>Solid angle <math>\Omega</math></b>	Solid angle $\Omega$ is the area within a sphere that is pervaded by the light emitted by a light source. The steradian (sr) is the unit of measure for solid angle, whereby $1 \text{ sr} = 65.5^\circ$ . This describes a cone with its peak in the light source and a beam spread angle of $65.5^\circ$ . A whole solid angle is expressed as $4\pi \text{ sr} = 12.56 \text{ sr}$ .
<b>Standards</b>	VS products comply with the regulations of the following European standards: <ul style="list-style-type: none"> <li>• <b>Electronic ballasts for fluorescent lamps:</b> EN 61347-1, EN 61347-2-3, EN 60929, EN 55015, EN 61547, EN 61000-3-2, IEC 62493</li> <li>• <b>Electronic ballasts for high-pressure discharge lamps:</b> EN 61347-1, EN 61347-2-12, EN 55015, EN 61547, EN 61000-3-2, IEC 62493</li> <li>• <b>Electronic convertors:</b> EN 61347-1, EN 61347-2-2, EN 61047, EN 55015, EN 61547, EN 61000-3-2, IEC 62493</li> <li>• <b>Electromagnetic ballasts:</b> EN 61347-1, EN 61347-2-8, EN 61347-2-9, EN 60921, EN 60923, EN 50294, EN 55015, EN 61547, EN 61000-3-2, IEC 62493</li> <li>• <b>Electromagnetic transformers:</b> EN 61558-1, EN 61558-2-6, EN 55015, EN 61547, EN 61000-3-2, IEC 62493</li> <li>• <b>Igniters:</b> EN 61347-1, EN 61347-2, EN 60927, EN 55015, EN 61547, EN 61000-3-2</li> <li>• <b>Capacitors:</b> EN 61048, EN 61049</li> <li>• <b>Lampholders:</b> EN 60238, EN 60400, EN 60838-1, EN 61184, EN 60399</li> <li>• <b>Digital control inputs of operating devices:</b> IEC 62386</li> <li>• <b>LED:</b> IEC 62031, IEC 61347-1, IEC 61347-2-13, IEC 62384, IEC 61231, IEC TR 61341, IEC 60838-2-2, IEC 62471(-1), IEC 62471-2</li> <li>• <b>EMC/EMF:</b> EN 55015, EN 61547, EN 61000-3-2, IEC 62493</li> </ul>
<b>Stroboscopic effect</b>	Optical illusion whereby objects appear either to be moving or stationary in contrast to their actual state when illuminated by periodically alternating light.
<b>Superimposed ignition</b>	Generation of the ignition voltage required for high-pressure lamps by the ignitor independent of the ballast (superimposed over the mains voltage).
<b>System power consumption</b>	Total power input of lamp and operating device (in watt).
<b>T <math>t_a</math></b>	Ambient temperature
<b>TALQ</b>	Industrial consortium for the globally recognised standardisation of a management software interface for outdoor lighting networks. The aim is to enable the interoperability of central management systems and outdoor lighting networks made by different manufacturers.
<b>Tandem circuit</b>	Series connection of two fluorescent lamps using a single ballast.
<b><math>t_c</math></b>	Maximum operating temperature of the casing at the marked measuring point.
<b>Temperature details</b>	The temperature details on our VS ballasts are always maximum values; these are based on the maximum voltage values given on the type plate.
<b>The Connected Lighting Alliance</b>	Industrial consortium that was founded by GE Lighting, Lutron, OSRAM, Panasonic, Philips, Toshiba in August 2012 for the purpose of supporting global use and distribution of wireless connectivity in lighting applications.
<b>Thermal classes</b>	Classification of transformers according to the degree of heat resistance offered by the insulation materials.
<b>Thermal cut-out</b>	Protection from overheating due to abnormal lamp conditions (rectifier effect, short-circuit and overload), with automatic restart after cooling.
<b>Transient mains overvoltages</b>	Voltage peaks that briefly occur and are superimposed over the mains voltage.
<b>T rating</b>	Rated value of the lampholder's maximum operating temperature (e.g. T130).
<b>Tungsten-halogen cycle</b>	In the outer, cooler part of the lamp, the halogen combines with the tungsten vapour released by the filament to form a tungsten-halogen molecule which then decomposes and deposits the tungsten on the filament.
<b><math>t_w</math></b>	Maximum permissible winding temperature.
<b>U UL, UL approval</b>	Underwriters' Laboratories Inc., USA; US conformity mark for safety.
<b>V VDE mark</b>	Safety mark on the basis of the German safety standard for electrical equipment; tested by the VDE-PZI (Verband Deutscher Elektrotechniker - Prüf- und Zertifizierungsinstitut).
<b>W Winding temperature</b>	Temperature of the copper winding in a magnetic ballast; the change in winding temperature is measured using the change of the resistance of the copper winding.
<b>Z Zhaga</b>	Global industrial consortium that has taken on the task of standardising the interfaces needed for LED light engines.
<b>ZVEI</b>	Central association of the electrotechnical and electronics industry in Germany (Zentralverband Elektrotechnik- und Elektronik-industrie e.V.).

# Reference Numbers

Ref. No.	Type	Page	Approval
100064	02120	234	1,3
100069	02150	234	1,3,33
100082	02525	87	1
100086	02543	87	1
100096	02574	86	1
100098	02575	87	1
100125	03210	352	-
100194	06700	352	-
100217	07400	353	-
100270	08610	353	-
100273	08701	353	-
100305	09105	202	1,3
100310	09205	202	1,3
100417	17400	353	-
100437	20200	242	1
100442	20400	222	-
100444	20401	222	-
100448	20501	222	-
100484	22600	216	1,3,33
100486	22601	216	1,3,33
100487	22602	216	1,3,33
100532	27151	213	1,3
100536	27200	213	1,3
100540	27201	213	1,3
100551	27356	221	1,3
100557	27450	214	1,3,33
100559	27460	214	1,3
100572	27722	221	1,3
100579	27820	211	1,3,33
100581	27821	211	1,3
100583	27822	221	1,3
100585	28100	214	1,3,33
100588	28200	214	1,3,33
100591	28500	212	1,3,33
100593	28501	212	1,3,33
100616	30023	319	1
100662	30300	310	1
100710	30523	319	1
100720	30550	319	1
100723	30602	86	1
100741	30620	86	1
100877	32100	308	1
100912	32300	317	1
100913	32301	84	1
100921	32311	84	1
100922	32321	84	1
100925	32326	85	1
100928	32330	85	1
100931	32336	85	1
100932	32341	84	1
100934	32361	84	1
100937	32381	85	1
100939	32400	303, 307, 309	1
101162	32600	308	1
101207	32620	308	1
101248	32680	308	1
101253	32690	308	1
101258	32700	303	1
101274	32720	303	1
101275	32730	303	1
101290	35002	188	1,3,33
101294	35003	188	1,3,33
101298	35004	189	1,3,33
101306	35006	189	1,3,33
101310	35007	189	1,3,33
101314	35008	189	1,3
101320	35010	189	1,3,33
101324	35011	190	1,3,33
101344	35051	190	1,3,33
101346	35052	190	1,3

Ref. No.	Type	Page	Approval
101358	35100	191	1,5,3
101364	35201	190	1,3,33
101367	35202	191	1,3,33
101410	35812	181	1,3
101448	35862	181	1,3
101485	36050	193	1,3,33
101489	36051	193	1,3,33
101491	36052	194	1,3,33
101493	36053	194	1,3,33
101497	36061	197	-
101521	36300	192	1,3
101528	40100	230	1,3
101532	40150	230	-
101627	43000	235	1,3,33
101629	43010	235	1,3
101631	43100	235	1,3
101636	43300	236	1,3,33
101643	46100	220	1,3
101647	46101	220	1,3
101651	46102	222	1,3
101655	46103	222	1,3
101681	47102	218	1,3
101706	47200	218	1,3
101708	47202	218	1,3
101712	47205	219	1,3
101716	47206	219	1,3
101740	47502	218	1,3
101745	47504	219	1,3,33
101765	47600	218	1,3
101769	47605	219	1,3,33
101773	47606	219	1,3
101781	47700	219	1,3
101784	47900	220	1,3,33
101785	47920	220	1,3,33
101787	48500	220	1,3
101789	48501	220	1,3
101791	48502	222	1,3
101793	48503	222	1,3
101812	49401	221	1
101910	52001	333	1
102407	58001	230	-
102409	58016	230	1,3
102577	62010	73, 343	1
102582	62015	73, 343	1
102599	62050	73, 343	1
102615	62104	73	1
102617	62105	73	1
102624	62310	74, 344	1
102635	62600	72	1
102637	62601	72	1
102923	78100	311	1,3
102925	78101	311	1,3
102938	80003	332	-
102939	80003	332	-
102946	80006	332	-
102947	80006	332	-
102956	80014	348	-
103020	80342	345	-
103021	80342	345	-
103026	80343	345	-
103027	80343	345	-
103087	80433	354	-
103359	81019	332	-
103360	81019	332	-
103365	81022	332	-
103366	81022	332	-
103414	81093	330	-
103415	81093	330	-
103424	81095	329	1,3,33
103430	81109	330	-



















1	
	ENEC 1a applied
2	
3	
5	
7	
13	
13a	
14	
	VDE 14a applied
15	
17	
19	
25	
28	
31	
32	
33	
34	
35	

1
2
3
4
5
6
7
8
9
10

# Reference Numbers

Ref. No.	Type	Page	Approval
103431	81109	330	-
103442	81120	330	-
103443	81120	330	-
103467	83000	340	-
103468	83000	340	-
103483	83002	340	-
103484	83002	340	-
103504	83006	347	1
103515	83008	347	1
103520	83011	340	1,33
103569	83173	340	-
103570	83173	340	-
103582	83218	345	-
103583	83218	345	-
103587	83218	348	-
103590	83219	345	-
103591	83219	345	-
103594	83219	348	-
103595	83221	345	1
103597	83223	345	1
103643	83285	340	1,33
103709	84122	229	-
103710	84122	229	-
103711	84123	229	-
103712	84123	229	-
103743	84154	229	-
103744	84154	229	-
103749	84159	229	-
103750	84159	229	-
103818	86037	87	-
104928	94304	346, 347	-
105144	96010	346, 347	-
105179	96033	346	-
105185	96034	346	-
105448	97031	195	-
105482	97064	237	-
105483	97065	237	-
105484	97065	237	-
105775	35060	195, 196	-
105776	35060	195, 196	-
105777	35760	196	-
105820	97515	195	-
105824	97516	195	-
105843	97532	223	-
105845	97533	223	-
105847	97534	223	-
105931	35061	196	-
105981	97638	197	-
106094	98085	228	-
106095	98086	237	-
106248	32800	305	1,34
106249	32820	305	1,34
106256	94060	310	-
106262	35842	181	1,3
106416	35060	195, 196	-
106417	35760	196	-
106455	09210	202	1,3
106457	32480	308	1
106513	78201	311	1,34
106583	78201	311	1,34
106585	62110	73	1
106766	94067	354	-
106767	94068	354	-
106768	94069	354	-
106802	94074	354	-
106817	98006	350	-
106818	02170	235	1,3
106829	94450	355	-
106893	35814	183	1,3
106912	35912	181	1,3



















Ref. No.	Type	Page	Approval
106948	09501	357	-
106949	09502	357	-
107065	31662	83	1
107066	31672	83	1
107096	83015	348	1
107154	05202	352	-
107177	96242	338	-
107178	96206	338	-
107192	32360	318	1
107193	32340	318	1
107194	32320	318	1
107195	32310	318	1
107213	32390	317	1
107214	32391	317	1
107215	32395	317	1
107331	83015	348	1
107445	43410	237	1
107536	09000	231	1,3
107617	35844	183	1,3
107618	35864	183	1,3
107677	21100	88	34
107694	33100	311	-
107716	81096	329	1,33
107723	43510	236	1
107780	12800	75, 358	1
107861	35914	183	1,3
107957	84171	225	1
107958	84172	226	1,3
107959	84173	225	1
107960	84174	226	1,3
108208	12800	75, 358	1
108266	98003	208, 223, 225	-
108267	98004	208, 226	-
108304	97159	356	-
108373	12812	76, 359	1
108374	12810	76, 358	1
108375	12810	76, 358	1
108416	62622	73	1
108437	28920	215	1,3
108438	28921	215	1,3
108449	30471	305	1
108454	43500	236	1
108575	35944	183	1,3
108576	35964	183	1,3
108608	84175	226	1,3
108614	84175	226	1,3
108666	84172	226	1,3
108669	84174	226	1,3
108671	43020	235	1,3
108674	30350	310	1
108678	94071	307	-
108718	62150	72	1
108719	62151	72	1
108730	48230	215	1
108747	64740	335	1,33
108748	64800	351	1
108758	64741	336	1,33
108773	22800	216	1
108775	22801	216	1
108777	22850	216	1
108778	22851	216	1
108780	97044	223	-
108816	22604	216	1,3,33
108819	22852	227	1
108845	97117	224	-
108847	17803	353	-
108878	36060	197	-
108898	35012	190	1,3,33
108927	35500	191	1,3
108928	35510	191	1,3

- 1  ENEC  
1a applied
- 2 
- 3 
- 5 
- 7 
- 13 
- 13a 
- 14  VDE  
14a applied
- 15 
- 17 
- 19 
- 25 
- 28 
- 31 
- 32 
- 33 
- 34  UL US
- 35 

# Reference Numbers

Ref. No.	Type	Page	Approval
108932	35530	192	1,3
108933	35540	192	1,3
108934	35550	192	1,3
108936	64401	334	1,3,3
108937	02500	86	1
108940	85007	320	-
108947	98002	208, 227	-
108948	84180	227	1
108953	64770	335	1,3,3
108956	97194	355	-
108965	64501	334	1,3,3
108979	31000	314	1,3,4
108983	64307	325	1,3,3
108984	22900	216	1
108994	84181	227	1
109007	31010	314	1,3,4
109039	83007	341	-
109041	81130	331	-
109044	96172	342	-
109045	97511	338	-
109052	83007	341	-
109054	81130	331	-
109060	96172	342	-
109062	97511	338	-
109074	83293	341	-
109077	85070	336	-
109081	83274	342	-
109084	96159	331	-
109086	97147	224	-
109087	83293	341	-
109092	85070	336	-
109093	83274	342	-
109095	96159	331	-
109098	83035	341	-
109099	83035	341	-
109102	81002	330	-
109103	81002	330	-
109110	85075	326	-
109112	85075	326	-
109119	97666	327	-
109120	97666	327	-
109122	97635	327	-
109123	97635	327	-
109126	97697	327	-
109145	81024	330	-
109149	96211	331	-
109150	96211	331	-
109152	81132	331	-
109153	81132	331	-
109158	83297	350	1
109159	83282	338	-
109162	03210	352	-
109166	05202	352	-
109184	97698	337	-
109187	96148	341	-
109188	96148	341	-
109190	96154	342	-
109191	96154	342	-
109195	96147	341	-
109196	96147	341	-
109198	83260	348	-
109199	83260	348	-
109200	96229	349	-
109201	96229	349	-
109235	35610	187	1,3
109238	35611	188	1,3
109240	35612	188	1,3
109243	83300	350	-
109247	09708	356	-
109248	09701	357	-

Ref. No.	Type	Page	Approval
109249	09703	356	-
109253	09701	357	-
109280	96033	346	-
109281	96034	346	-
109282	83258	347	-
109283	83258	347	-
109285	08610	353	-
109291	08701	353	-
109317	96160	357, 358	17
109318	96160	357, 358	17
109330	27700	210	1,3,3,3
109331	27701	210	1,3,3,3
109332	27800	210	1,3
109335	27801	210	1,3
109338	28500	211	1,3,3,3
109339	28501	211	1,3,3,3
109340	28600	211	1,3,3,3
109341	28601	211	1,3,3,3
109383	64001	324	1,3,3
109384	64001	324	1,3,3
109386	64101	324	1,3,3
109387	64101	324	1,3,3
109411	97244	315	-
109429	64501	334	1,3,3
109462	83282	338	-
109487	48300	220	1
109497	32380	318	1
109512	96124	342	-
109532	84000	209	-
109547	33300	302, 306, 309	1,3,4
109548	97255	302	-
109550	97257	302, 313	-
109553	94095	307	-
109554	94096	309	-
109555	97260	338	-
109556	97260	338	-
109559	96124	342	-
109560	97698	337	-
109568	62111	73	1
109575	97065	237	-
109592	09705	357	-
109600	09704	358	-
109621	94435	354	-
109622	94436	354	-
109674	33400	302	1,3,4
109676	97636	326	-
109677	97636	326	-
109679	97665	337	-
109680	97665	337	-
109685	94088	206	-
109686	09170	206	1,3
109725	97750	355	-
109728	97752	355	-
109784	02110	234	1,3,3,3
109790	43200	236	1,3
109792	43210	236	1,3,3,3
109794	97664	337	-
109795	97664	337	-
109805	81024	330	-
109838	64770	335	1,3,3
140413	Z 70 S	50	14
140425	Z 250 S	51	14
140427	Z 400 S	52	14
140430	Z 1000 S	55	14
140432	Z 2000 S	58	-
140471	Z 1000 L	56	-
140481	Z 70 K	50	14
140489	Z 250 K	51	14
140496	Z 1000 S/400 V	56	14
140497	Z 2000 S/400 V	58	14

1	
1a	ENEC applied
2	
3	
5	
7	
13	
13a	
14	
14a	VDE applied
15	
17	
19	
25	
28	
31	
32	
33	
34	
35	




















1
2
3
4
5
6
7
8
9
10



# Reference Numbers

Ref. No.	Type	Page	Approval
140499	Z 3500 S/400 V	58	-
140537	CE 50	68	-
140594	Z 400 M	53	14
140597	Z 400 M K	53	14
140607	Z 1000 TOP	55	14
140608	Z 1200/2,5	57	-
140609	Z 1200/9	57	-
140613	PZS 1000 K	60	14
140617	PZI 1000/1 K	60	14
140621	PU 12 K	63	14
140622	PU 120 K	63	14
140623	PU 121 K	63	-
140627	AS 1000 K	66	-
140693	Z 400 M S	53	14
141193	AS 1000 K A10	67	-
141580	Z 70 K D20	50	14
141581	Z 250 K D20	51	14
141582	Z 400 M K D20	53	14
141583	Z 400 S D20	52	14
141584	Z 1000 S D20	55	14
142098	ZPU 70 K D20	64	14
142099	ZPU 250 K D20	64	14
142150	PR 12 K D	63	14
142170	PR 12 K LC	63	14
142320	Z 70 K	50	14
142330	Z 70 K D20	50	14
142340	Z 250 K	51	14
142350	Z 250 K D20	51	14
142360	Z 400 M K	53	14
142361	Z 400 M K VS-Power	53	14
142370	Z 400 M K D20	53	14
142783	PZ 1000/400 V A5	59	14
142784	PZ 1000 K D20	59	14
142897	Z 400 M K VS-Power	53	14
146990	Z 750 S	54	14
147230	SP 230/10 K	18	14
147707	Z 400 M VS-Power	53	14
147790	HZ 600 K	61	-
147791	HZ 1000 K	62	-
147793	HZ 2000 K/400 V	62	-
149992	SU 1-10 V K	65	14
149993	PR 1-10 V K LC	65	14
159968	0607	224	-
160597	NaHJ 250.160	27	1,19,31
160604	NaHJ 250.163	27	-
160613	NaHJ 70/50.157	26	1
161158	NaHJ 100/70.519	27	1
161367	NaHJ 35.485	26	1
161371	NaHJ 35.638	26	-
161379	NaH 50.486	26	1
161392	NaHJ 70.653	26	-
161399	NaH 50.654	26	-
161460	UNaH 70/40%.691	44	-
161469	NaHJ 100/70.703	27	1
161471	NaHJ 100/70.709	27, 44	-
161475	UNaH 150/40%.717	44	-
161662	NaHJ 70.158	26	1
161686	NaHJ 250.915	27	1,31,32
161707	NaHJ 100.941	27	1
161757	STr 50/12.301	296	15,19
161781	STr 20/12.306	296	19
161860	STr 20/12.306	297	19
161935	STr 105/12.406	297	-
162400	EST 75/12G.302	294	14
163256	L 20.122	172, 176	34
163305	L 7/9/11.207	168	-
163318	L 7/9.209	172	34
163683	L 4/6/8.304	173	1,19,25
163694	L 7/9/11.307	168	1,19,25,31
163702	L 15.308	176	34,35



















Ref. No.	Type	Page	Approval
163711	LN 13.313	168, 173	1,19,25,31
163730	LN 16.316	168, 174	1,25
163763	LN 181.319	169	1,19,25,31
163861	LN 15.329	174	1,25
164013	L 25.346	174	1
164033	L 30.347	174	19,25,31
164326	L 4/6/8.404	173	1
164335	L 7/9/11.411	168	1
164342	LN 13.413	168, 173	1
164353	LN 181.418	170	1
164358	LN 16.417	168, 175	1
164438	L 36/40.443	170, 175	1
164555	LN 36.505	170, 175	1
164560	LN 58.506	170, 175	1
164566	LN 18.507	170, 175	1
164572	LN 18.510	169, 174	1
164590	LN 36.511	169, 174	1
164680	LN 30.530	169	-
164779	L 181.602	171	-
164828	L 58.625	171, 175	-
164870	L 58.657	171, 175	-
167100	Q 50.501	38	1
167125	Q 50.508	38	1
167132	Q 80.510	38	1
167136	Q 125/80.511	38	1
167140	Q 125.512	38	1
167144	Q 250.513	38	1,19,31
167185	Q 50.535	38	-
167213	Q 50.550	38	1,32
167250	Q 400.561	38	1,19,31
167263	Q 125.568	38	1,19,31,32
167299	Q 80.584	38	-
167302	Q 80.587	38	19
167304	Q 80.588	38	1,19,31,32
167306	Q 80/50.592	38	-
167311	Q 80/50.596	38	1
167326	Q 125/80.611	38	1
167330	Q 400.612	38	1,19,31,32
167335	Q 400.613	38	-
167367	Q 250.528	38	1,19,31,32
167374	Q 400.669	38	1
169125	STr 105/12.406	296	-
169389	LN 58.568	169, 174	1
169645	LN 30.801	174	1
169647	LN 13.805	168	1
169658	L 58.718	169, 174	1
169721	NaHJ 150.995	29	1,32
169722	NaHJ 70.158	29	1,32
169747	STr 105/12.311	297	19,31
169748	STr 50/12.401	297	-
169779	LN 36.570	169, 174	1
169830	STr 50/12.401	296	-
169892	UNaH 250/40%.983	44	-
169947	Q 125.549	38	1,19
170002	STr 105/12.311	296	15,19,31
170091	STr 50/12.301	297	14,19
170117	L 14.139	176	-
172773	Phase-cutting trailing-edge dimmer	295	-
172774	Phase-cutting leading-edge dimmer	295	-
172775	Cover plate	164, 295	-
172776	Light sensor	164	-
172777	Multi sensor	164	-
172778	Manual controller	164	-
174961	NaHJ 70.300	26	1,31
178177	NaHJ 250.340	27	1
178771	NaHJ 250.727	34	1,19,32
178790	NaHJ 400.006	34	1,31,32
179424	NaHJ 400.737	34	1,19,31,32
179444	STr 50/12.337	297	-
179454	NaH 600.005	34	1,19

- 1  ENEC applied
- 2  UL 15 D
- 3  UL US
- 5  CSV
- 7  Y
- 13  KEMA KEUR
- 13a  KEMA EMC
- 14  VDE applied
- 14a  VDE applied
- 15  VDE
- 17  S
- 19  PC
- 25  B
- 28  VDE EMC
- 31  IFAM
- 32  SABS
- 33  CQC
- 34  UL US
- 35  ETL RECOGNIZED COMPONENT US

# Reference Numbers

Ref. No.	Type	Page	Approval
179604	STr 60/12.338	296	–
179608	STr 60/12.338	297	–
179740	NaHJ 400.006	34	1,31,19
179742	NaH 600.010	34	1
179743	NaHJ 250.003	34	1
179792	EST 60/12.388	291	1,14,28
179793	EST 120/12.389	291	1,14,28
183000	EHXc 100.353	15	1,14,28
183001	EHXc 100.353	15	1,14,28
183026	EHXe 35.356	10	14
183027	EHXe 70.357	10	14
183028	EHXc 50.358	9	1,14,28
183029	EHXc 50.358	9	1,14,28
183030	EHXc 50.358	9	1,14,28
183032	EHXc 50.372	11	1,14,28
183033	EHXc 35.325	9	1,14,28
183034	EHXc 35.325	9	1,14,28
183035	EHXc 35.325	9	1,14,28
183036	EHXc 70.326	9	1,14,28
183037	EHXc 70.326	9	1,14,28
183038	EHXc 70.326	9	1,14,28
183039	ELXc 424.223	155	1,14,28
183040	ELXc 226.878	142	1,14,28
183046	EHXc 150G.334	15	1,14,28
183047	EHXc 150G.334	15	1,14,28
183048	EHXd 50.360	16	14,28
183049	EHXd 70.361	16	14,28
183050	EHXd 100.362	16	14,28
183051	EHXd 150.363	16	14,28
183052	EHXd 250.364	16	14,28
183059	ELXd 235.735	161	1,14,28
183060	EHXd 50.360	17	14,28
183061	EHXd 70.361	17	14,28
183062	EHXd 100.362	17	14,28
183063	EHXd 150.363	17	14,28
183064	EHXd 250.364	17	14,28
183094	ELXc 328.224	155	1,2
183097	EHXc 20.370	11	1,14,28
183098	EHXc 35.371	11	1,14,28
183099	EHXc 70.373	11	1,14,28
183103	ELXc 135.225	152	1,2,26
183104	ELXc 136.226	152	1,2,26
183108	ELXc 226.878	142	1,14,28
183109	ELXc 414.227	158	16
183110	ELXc 424.228	158	16
183111	ELXc 228.229	158	16
183112	ELXc 328.230	158	16
183113	ELXc 135.231	158	16
183114	ELXc 235.232	158	16
183115	ELXc 239.233	158	16
183116	ELXc 149.234	158	16
183117	ELXc 249.235	158	16
183118	ELXc 254.236	158	16
183119	ELXc 180.237	158	16
183122	ELXc 114.238	159	16
183123	ELXc 128.239	159	16
183124	ELXc 214.240	159	16
183125	ELXc 228.241	159	16
183126	ELXc 414.242	159	16
183127	ELXc 118.243	159	16
183128	ELXc 136.244	159	16
183129	ELXc 158.245	159	16
183130	ELXc 218.246	159	16
183131	ELXc 236.247	159	16
183132	ELXc 258.248	159	16
183133	ELXc 418.249	159	16
183134	ELXc 118.879	144	16
183135	ELXc 126.880	144	16
183136	ELXc 218.881	144	16
183137	ELXc 226.882	144	16

Ref. No.	Type	Page	Approval
183150	ELXc 118.879	144	16
183151	ELXc 126.880	144	16
183152	ELXc 218.881	144	16
183153	ELXc 226.882	144	16
186005	EST 70/12.601	293	1,14,28
186007	EST 105/12.602	293	1,14,28
186068	EST 200/12.649	292	1,13,28
186072	EST 70/12.380	290	1,14,28
186077	EST 105/12.381	290	1,14,28
186098	EST 150/12.622	290	1,14,28
186117	EST 70/12.643	292	1,14,28
186118	EST 105/12.644	292	1,14,28
186119	EST 150/12.645	292	1,14,28
186173	EST 60/12.635	290	13
188080	Cord grip	13	–
188093	ELXc 135.856	155	1,14,28
188094	ELXc 235.857	155	1,14,28
188095	ELXc 149.858	155	1,14,28
188140	ELXc 140.862	135, 155	1,14,28
188142	ELXc 154.864	155	1,14,28
188144	ELXc 180.866	135, 155	1,14,28
188223	EHXc 235.316	12	1,14,28
188224	EHXc 270.317	12	1,14,28
188276	ELXd 170.808	149	1,14,28
188329	ELXd 124.600	137, 162	1,14,28
188330	ELXd 224.601	137, 162	1,14,28
188331	ELXd 139.602	137, 162	1,14,28
188332	ELXd 154.603	137, 162	1,14,28
188333	ELXd 254.604	137, 162	1,14,28
188334	ELXd 180.605	137, 162	1,14,28
188335	ELXd 249.606	162	1,14,28
188336	ELXd 124.607	137, 161	1,14,28
188337	ELXd 224.608	137, 161	1,14,28
188338	ELXd 139.609	137, 161	1,14,28
188339	ELXd 239.610	137, 161	1,14,28
188340	ELXd 154.611	137, 161	1,14,28
188341	ELXd 254.612	137, 161	1,14,28
188342	ELXd 180.613	137, 161	1,14,28
188343	ELXd 249.614	161	1,14,28
188344	ELXd 118.615	137, 163	1,14,28
188345	ELXd 218.616	137, 163	1,14,28
188346	ELXd 136.617	137, 163	1,14,28
188347	ELXd 236.618	137, 163	1,14,28
188348	ELXd 158.619	163	1,14,28
188349	ELXd 258.620	163	1,14,28
188350	ELXd 239.621	137, 162	1,14,28
188400	ELXc 257.836	142, 143	1,14,28
188431	ELXd 226.801	149	14,28
188438	ELXc 414.868	155	1,14,28
188455	EHXc 235.316	12	1,14,28
188456	EHXc 270.317	12	1,14,28
188490	ELXd 226.801	149	14,28
188495	ELXd 170.808	149	1,14,28
188549	ELXd 218.803	149	1,14,28
188550	ELXd 242.807	149	1,14,28
188564	ELXd 118.802	149	1,14,28
188565	ELXd 142.806	149	1,14,28
188589	ELXc 128.869	140, 141	1,14,28
188590	ELXc 128.869	142, 143	1,14,28
188595	ELXc 336.214	155	1,14,28
188596	ELXd 318.622	161	1,14,28
188597	ELXd 324.623	137, 161	1,14,28
188598	ELXd 424.624	137, 161	1,14,28
188599	ELXd 418.625		1,14,28
188600	ELXd 324.626	137, 162	1,14,28
188601	ELXd 318.627	163	1,14,28
188602	ELXd 424.628	137, 162	1,14,28
188603	ELXd 418.629		1,14,28
188604	ELXd 280.630	161	1,14,28
188605	ELXd 280.631		1,14,28

1	
	ENEC 1a applied
2	
3	
5	
7	
13	
13a	
14	
	VDE 14a applied
15	
17	
19	
25	
28	
31	
32	
33	
34	
35	




















1
2
3
4
5
6
7
8
9
10



# Reference Numbers

Ref. No.	Type	Page	Approval
188616	ELXc 240.863	135, 155	1,14,28
188617	ELXc 249.859	155	1,14,28
188618	ELXc 254.865		1,14,28
188619	ELXc 280.538	135, 155	1,14,28
188643	ELXc 242.837	140, 141	1,14,28
188661	ELXs 116.900	134, 151	14,28
188662	ELXs 116.903	134, 151	14,28
188663	ELXs 121.901		14,28
188664	ELXs 121.904	134, 151	14,28
188665	ELXs 124.902	134, 151	14,28
188666	ELXs 124.905	134, 151	14,28
188667	ELXs 126.906	134	14,28
188668	ELXs 126.907	134	14,28
188680	ELXc 155.378	141	1,14,28
188681	ELXc 155.378	143	1,14,28
188683	ELXc 170.833	143	1,14,28
188687	ELXc 242.837	142, 143	1,14,28
188694	ELXd 118.802	149	1,14,28
188695	ELXd 142.806	149	1,14,28
188696	ELXd 218.803	149	1,14,28
188697	ELXd 242.807	149	1,14,28
188698	ELXc 213.870	140	1,14,28
188699	ELXc 218.871	140	1,14,28
188700	ELXc 142.872	140, 141	1,14,28
188704	ELXc 136.207	156	14
188705	ELXc 236.208	156	14
188706	ELXc 158.209	156	14
188707	ELXc 258.210	156	14
188708	ELXc 136.207	156	14
188709	ELXc 236.208	156	14
188710	ELXc 158.209	156	14
188711	ELXc 258.210	156	14
188712	ELXc 213.870	142	1,14,28
188713	ELXc 218.871	142	1,14,28
188714	ELXc 142.872	142, 143	1,14,28
188717	ELXd 135.823	161	1,14,28
188744	ELXc 418.204	155	1,14,28
188864	ELXd 117.715	150	1,14,28
188865	ELXd 117.715	150	1,14,28
188866	ELXd 217.717	150	1,14,28
188867	ELXd 217.717	150	1,14,28
188868	ELXc 136.216	157	1,14,28
188869	ELXc 236.217	157	1,14,28
188870	ELXc 158.218	157	1,14,28
188871	ELXc 258.219	157	1,14,28
188873	ELXd 118.718	137, 161	1,14,28
188874	ELXd 218.719	137, 161	1,14,28
188875	ELXd 136.720	137, 161	1,14,28
188876	ELXd 236.721	137, 161	1,14,28
188877	ELXd 158.722	137, 161	1,14,28
188878	ELXd 258.723	161	1,14,28
188886	ELXc 213.874	145	1,14,28
188887	ELXc 218.875	145	1,14,28
188888	ELXc 142.876	145, 146	1,14,28
188889	ELXc 242.877	145, 146	1,14,28
188912	ELXc 136.216	157	1,14,28
188913	ELXc 236.217	157	1,14,28
188914	ELXc 158.218	157	1,14,28
188915	ELXc 258.219	157	1,14,28
188921	ELXc 135.220	156	14,28
188922	ELXc 235.221	156	14,28
188923	ELXd 142.709	150	1,14,28
188924	ELXd 142.709	150	1,14,28
188932	ELXd 135.724	162	1,14,28
188933	ELXd 235.725	162	1,14,28
188945	ELXc 139.632	154	1,14,28
188946	ELXc 154.633	154	1,14,28
188947	ELXc 180.634	154	1,14,28
188948	ELXc 239.635	154	1,14,28
188949	ELXc 254.636	154	1,14,28

Ref. No.	Type	Page	Approval
188950	ELXc 280.637	154	1,14,28
188952	ELXd 118.705	150	1,14,28
188953	ELXd 118.705	150	1,14
188954	ELXd 218.707	150	1,14,28
188955	ELXd 218.707	150	1,14
188974	ELXd 242.711	150	1,14,28
188975	ELXd 242.711	150	1,14
188991	EHXc 20.329 B	8	1,14,28
188992	EHXc 20.329 I	8	1,14,28
188993	EHXc 35G.327 B	8	1,14,28
188994	EHXc 35G.327 I	8	1,14,28
400548	32020	307	1
400671	94066	354	-
400699	80474	354	-
400732	97755	356	-
400772	80476	355	-
400779	80475	354	-
400817	85076	326	-
400818	85076	326	-
400819	85077	337	-
400820	85077	337	-
400913	12600	75	1
400914	12600	75	1
400915	12610	75	1
400916	12610	75	1
400917	12614	75	1
400918	12614	75	1
401536	94444	354	-
401549	94438	355	-
401970	97754	356	-
500105	36010	194	1
500106	36011	194	1
500296	Capacitor	276	1
500299	Capacitor	276	1
500300	Capacitor	276	1
500301	Capacitor	276	1
500302	Capacitor	276	1
500303	Capacitor	276	1
500304	Capacitor	276	1
500305	Capacitor	276	1
500315	Capacitor	276	1
500316	Capacitor	276	1
500317	Capacitor	276	1
500318	Capacitor	276	1
500319	Capacitor	276	1
500320	Capacitor	276	1
500321	Capacitor	276	1
500322	Capacitor	276	1
500323	Capacitor	276	-
500401	NaHJ 250.011	34	-
500402	NaHJ 400.737	34	1
500403	NaHJ 400.012	34	1
500574	35613	187	1,3
500757	84001	206, 209	-
500810	64401	334	1,33
500843	5Tr 50/12.207	296	-
500969	NaHJ 250.727	34	1,19
500976	NaHJ 250.727	34	1,19
501351	08400	347	-
501352	08400	347	-
501356	64601	334	1,33
501358	64601	334	1,33
501533	09145	203	1
501534	09146	203	1
501942	97268	314	-
502004	33500	314	1,34
502064	97320	315	-
502111	31020	315	1,34
502112	31030	315	1,34
502394	33600	77	1

- 1  ENEC  
1a applied
- 2 
- 3 
- 5 
- 7 
- 13 
- 13a 
- 14  VDE  
14a applied
- 15 
- 17 
- 19 
- 25 
- 28 
- 31  
- 32 
- 33 
- 34 
- 35 

# Reference Numbers

Ref. No.	Type	Page	Approval
502416	97282	315	-
502503	05202	314	-
502515	83301	350	-
502555	35942	181	1,3
502556	35962	181	1,3
502592	Str 50/12.422	296	-
502783	Capacitor	276	1
502799	NaHj 100.941	29	1
502818	Q 125.598	38	-
503010	NaHj 35.485	29	1,32
503041	64781	335	1,33
503136	NaHj 70/50.695	45	1
503457	97000	327	5
503458	97000	327	5
503579	97322	325	-
503773	98087	208, 228	-
503923	64201	324	1,33
503924	64201	324	1,33
504078	98011	208, 226	-
504109	NaHj 250.340	27	1
504131	NaHj 100/70.703	29, 45	1
504135	NaHj 150/100.973	29, 45	1
504202	28315	215	1
504296	31690	316	1
504297	31691	316	1
504302	64719	334	1,33
504303	64719	334	1,33
504351	Capacitor	276	1
504416	31695	83	1
504467	Q 250.417	41	1,32
504474	Q 400.001	41	1,32
504615	97321	336	-
504640	83226	345	-
504641	83226	345	-
504643	83227	345	-
504644	83227	345	-
504669	31696	83	1
504749	96021	351	-
504769	83283	338	-
504933	97272	199	-
504938	97277	198	-
504939	97278	198	-
505002	Q 400.001	41	1
505003	97280	199	-
505014	64770	72	1
505029	31980	82	1
505030	31981	82	1
505054	NaHj 250.915	29	1,31,32
505118	97281	199	-
505251	93088	321	-
505389	64770	72	1,33
505720	64719	72	1
505721	64719	72	1,33
505732	09404	203	1,3
505732	09404	207	1,3
505733	09405	203	1,3,33
505734	09406	203	1,3,33
505735	09415	204	1,3,33
505736	09416	204	1,3,33
505737	09420	204	1,3,33
505739	09421	204	1,3
505745	09426	205	1,3,33
505746	09427	205	1,3,33
505747	09440	205	1,3
505750	09450	205	1,3,33
505751	09460	206	1,3,33
505782	J 400.027	34	1
505951	83310	314	-
506007	28310	215	1,33
506020	09607	358	17

Ref. No.	Type	Page	Approval
506024	09607	358	17
506026	09606	357	17
506027	09606	357	17
506120	NaHj 100.670	28	1,19
506122	NaHj 35.485	28	1,32
506211	94079	354	-
506247	64360	325	1,33
506249	64360	325	1,33
506255	64775	335	1,33
506257	64775	335	1,33
506263	64785	335	1,33
506265	64785	335	1,33
506267	64785	335	1,33
506366	Capacitor	276	1
506398	33700	313	1,34
506495	Capacitor	276	1
506807	93089	321	-
506943	83001	349	1,33
507049	81018	332	-
507050	81018	332	-
507052	81017	332	-
507053	81017	332	-
507055	83283	338	-
507105	34000	306	1
507133	48205	219	1
507134	48206	219	1
507177	83005	349	-
507178	83005	349	-
507181	Str 50/12.342	296	-
507256	Q 250.703	38	1
507341	NaHj 70/50.157	28	1
507342	NaHj 100/70.703	28	1
507343	NaHj 150/100.973	28	1
507470	33710	313	1,34
507490	97257	302, 313	-
507498	NaH 50.486	29	1
507562	97677	207	-
507592	97528	85, 319	-
507593	97528	85	-
507627	UNaH 150/100.722	45	1
507656	41900	82	1
507671	NaHj 100.126	27	1,19
507697	NaHj 70/50.695	29	1
507797	97267	356	-
507798	97267	356	-
507802	83146	346	1
507803	83147	346	1
507936	LN 58.192	170, 175	1
507992	45930	187	14
507993	45940	187	14
507994	45960	187	14
507995	45980	187	14
508067	97037	328	5
508186	LN 58.116	169, 174	1
508245	Q 400.613	38	-
508306	33710	313	1,34
508314	09465	206	1,3
508352	96004	331	-
508353	96004	331	-
508423	28330	215	1
508468	Capacitor	276	1
508484	Capacitor	277	1
508562	97355	321	15
508563	97356	321	-
508590	09407	204	1,3
508667	Capacitor	276	1
508668	Capacitor	276	1
508723	NaHj 250.340	29	1
508741	NaHj 400.012	34	1
508744	NaHj 250.011	34	-



















1	
1a	ENEC applied
2	
3	
5	
7	
13	
13a	
14	
14a	VDE applied
15	
17	
19	
25	
28	
31	
32	
33	
34	
35	

1
2
3
4
5
6
7
8
9
10

# Reference Numbers

Ref. No.	Type	Page	Approval
508746	Q 250.417	41	1
508922	LN 181.940	169	1
509100	NaHJ 150.355	28	1,19,31
509110	93034	313	-
509117	34301	83	1
509118	93035	313	-
509152	47105	217	1,3,33
509154	47106	217	1,3,33
509156	47304	217	1,3,33
509162	47505	217	1,3,33
509164	47506	217	1,3,33
509169	NaHJ 70.653	28	-
509170	NaHJ 35.638	28	-
509171	NaHJ 150.679	28	-
509213	42000	81	1,3
509214	42100	82	1,3
509263	64307	325	1,3,33
509295	97355	321	1,5
509296	97356	321	1,5
509340	97427	328	1,7
509349	LN 58.990	169, 174	1
509356	31400	80	1,3,4
509357	33800	312	1,3,4
509373	L 36.120	171, 175	-
509490	NaHJZ 70/50.785	32	1,5
509491	NaHJZ 100/70.786	32	1,5
509492	NaHJZ 150/100.787	32	1,5
509502	LN 26.813	169	1,3,1
509519	93059	196	-
509520	93058	196	-
509521	93057	196	-
509522	93056	196	-
509534	40710	241	1
509535	40730	241	1
509613	J 400.027	34	1
520733	97705	326	-
520734	97705	326	-
520735	85074	326	-
520736	85074	326	-
520759	97708	327	-
520760	97708	327	-
520865	30470	306	1,3,4
520880	94455	312	-
520882	94457	312	-
520992	L 13.210	168, 173	-
521010	80280	312	-
521123	84105	228	1,3
525583	97760	313	-
525791	Str 50/12.109	296	-
525893	80016	241	-
526019	27780	212	1
526020	27781	212	1
526021	28580	212	1
526022	28581	212	1
526169	Capacitor	277	1
526170	Capacitor	277	1
526171	Capacitor	277	1
526196	NaHJ 150.679	27	-
526517	NaHJ 35.485	26	1
526616	NaHJ 150.679	29	-
526715	Q 1000.311	41	-
526886	97497	336	1,7
527191	LN 36.130	169, 174	1
527196	LN 36.201	170, 175	1
527502	71001	181	1,3,33
527503	71002	181	1,3,33
527504	71003	181	1,3,33
527506	71011	181	1,3,33
527507	71012	181	1,3,33
527508	71013	181	1,3,33

Ref. No.	Type	Page	Approval
527509	71014	181	1,3,33
527510	71015	181	1,3
527511	71016	181	1,3
527512	71019	181	1,3,33
527529	71101	182	1,3,33
527530	71102	182	1,3,33
527531	71103	182	1,3,33
527533	71111	182	1,3,33
527534	71112	182	1,3,33
527535	71113	182	1,3,33
527536	71114	182	1,3,33
527537	71115	182	1,3
527538	71116	182	1,3
527539	71119	182	1,3,33
527556	71201	184	1,3,33
527557	71202	184	1,3,33
527558	71203	184	1,3,33
527560	71211	184	1,3,33
527561	71212	184	1,3,33
527562	71213	184	1,3,33
527563	71214	184	1,3,33
527564	71215	184	1,3
527565	71216	184	1,3
527566	71219	184	1,3,33
527585	71301	182	1,3,33
527586	71302	182	1,3,33
527587	71303	182	1,3,33
527589	71311	182	1,3,33
527590	71312	182	1,3,33
527591	71313	182	1,3,33
527592	71314	182	1,3,33
527594	71315	182	1,3
527595	71316	182	1,3
527596	71319	182	1,3,33
527735	71501	180	1,3,33
527736	71502	180	1,3,33
527737	71503	180	1,3,33
527739	71511	180	1,3,33
527740	71512	180	1,3,33
527741	71513	180	1,3,33
527742	71514	180	1,3,33
527743	71515	180	1,3
527744	71516	180	1,3
527745	71519	180	1,3,33
527762	71601	185	1,3,33
527763	71602	185	1,3,33
527764	71603	185	1,3,33
527766	71611	185	1,3,33
527768	71612	185	1,3,33
527769	71613	185	1,3,33
527770	71614	185	1,3,33
527771	71615	185	1,3
527772	71616	185	1,3
527773	71619	185	1,3,33
527790	71701	184	1,3,33
527791	71702	184	1,3,33
527792	71703	184	1,3,33
527794	71711	184	1,3,33
527795	71712	184	1,3,33
527796	71713	184	1,3,33
527797	71714	184	1,3,33
527798	71715	184	1,3
527799	71716	184	1,3
527800	71719	184	1,3,33
528029	71801	183	1,3,33
528030	71802	183	1,3,33
528031	71803	183	1,3,33
528033	71811	183	1,3,33
528034	71812	183	1,3,33
528035	71813	183	1,3,33

- 1  ENEC  
1a applied
- 2  UL 15 D
- 3  UL US
- 5  CSV
- 7  Y
- 13  VEMA KEUR
- 13a  KEMA EMC
- 14  VDE  
14a applied
- 15  VDE
- 17  S
- 19  PC
- 25  B
- 28  VDE EMC
- 31  IFAM S
- 32  SABS
- 33  CQC
- 34  UL US
- 35  ETL RECOGNIZED COMPONENT US

# Reference Numbers

Ref. No.	Type	Page	Approval
528036	71814	183	1,3,33
528037	71815	183	1,3
528038	71816	183	1,3
528039	71819	183	1,3,33
528089	72001	186	1,3,33
528090	72002	186	1,3,33
528091	72003	186	1,3,33
528093	72011	186	1,3,33
528094	72012	186	1,3,33
528095	72013	186	1,3,33
528096	72014	186	1,3,33
528097	72015	186	1,3
528098	72016	186	1,3
528099	72019	186	1,3,33
528116	72101	186	1,3,33
528117	72102	186	1,3,33
528118	72103	186	1,3,33
528120	72111	186	1,3,33
528121	72112	186	1,3,33
528122	72113	186	1,3,33
528123	72114	186	1,3,33
528124	72115	186	1,3
528125	72116	186	1,3
528126	72119	186	1,3,33
528236	Q 400.616	38	1,19
528252	12900	76	15
528253	12910	76	15
528254	12911	76	15
528521	Q 700.035	41	-
528536	NaHJ 1000.089	35	1
528548	NaHJ 1000.089	35	1
528554	Capacitor	277	1
528555	Capacitor	277	1
528582	L 18.121	171, 175	1
528761	Q 1000.096	41	1
528886	Q 1000.145	41	1
528958	12901	76	15
529029	LN 36.149	169, 174	1
529072	NaHJ 250.163	27	-
529087	NaHJ 250.204	27	1,19
529464	97498	336	-
529560	NaH 600.140	34	-
529596	40712	241	1
529599	64740	335	1,33
529665	Capacitor	277	1
529666	Capacitor	277	1
529832	84101	207	1,3
529836	84103	208	-
529841	34311	83	1
529845	34326	83	1
530007	L 36.334	169, 174	1,19,25,31
530008	L 36/40.443	170, 175	1
530024	30400	304	1
530025	30450	304	1
530026	30460	304	1
530027	30465	304	1
530079	43520	237	1
530195	NaHJ 100.271	27	-
530252	L 36.158	171, 175	14
530458	72201	185	1,3,33
530459	72202	185	1,3,33
530460	72203	185	1,3,33
530462	72211	185	1,3,33
530463	72212	185	1,3,33
530464	72213	185	1,3,33
530465	72214	185	1,3,33
530466	72215	185	1,3
530467	72216	185	1,3
530468	72219	185	1,3,33
530535	84104	208	1,3

Ref. No.	Type	Page	Approval
530829	40711	241	1
530831	40731	241	1
530878	11000	198	1,3,33
530879	11010	198	1,3,33
530941	LN 18.131	169, 174	1
531017	J 1000G.41	37	-
531018	NaH 1000G.46	37	-
531021	J 2000G.42	37	-
531024	J 2000G.40	37	-
531182	VNaH 600.02	22	-
531193	VJ 2000.05	22	-
531472	VNaHJ 1000.61	22	-
531474	VJD 2000.63	22	-
531475	VNaHJ 400PZT.743	21	-
531476	VNaHJ 250PZT.745	21	-
531480	VNaHJ 1000.61	22	-
531481	VJD 2000.63	22	-
532149	L 18.121	171, 175	1
532155	LN 2x18.135	169, 174	1
532377	09420	202	1,3
532378	09421	202	1,3
532379	09422		1,3
532380	09423	203	1,3
532390	97545	337	-
532391	80023	337	-
532399	64770	339	-
532430	13010	88	34
532431	13010	88	34
532521	97685		-
532602	12801	75, 358	1
532603	12801	75, 358	1
532604	12811	76, 358	1
532605	12811	76, 358	1
532606	12812	76, 359	1
532610	33906	312	1
532644	L 4/6/8.218	173	-
533043	LN 18.162	170, 175	1
533067	LN 30.806	175	-
533312	41500	238	1
533313	41510	238	1
533314	41520	238	1
533315	41540	238	1
533316	41550	238	1
533317	41560	238	1
533391	VNaHJ 35PZTG.050	20	1
533392	VNaHJ 70PZTG.051	20	1
533393	VNaHJ 100PZTG.078	20	-
533394	VNaHJ 150PZTG.052	20	1
533395	NaHJZ 70/50.520	31, 46	1
533396	NaHJZ 100/70.519	31, 46	1
533398	NaHJZ 150/100.466	31, 46	1
533399	QZ 80/50.551	39	-
533400	QZ 125/80.553	39	-
533428	12601	75	1
533429	12601	75	1
533430	12611	75	1
533431	12611	75	1
533432	12612	75	1
533484	NaH 600.005	34	1,19
533565	NaHJ 150.620	27	1
533568	NaHJ 70.128	26	1
533572	NaHJ 70.128	28	1
533602	NaHJ 150.159	27	1,19
533650	LN 75.170	175	1
533663	37001	81	1
533705	Q 250.606	38	-
533820	64308	325	1,33
533860	40650	239	1
533861	40651	239	1
533865	40655	240	1



















- 1  ENEC  
1a applied
- 2  UL 15 D
- 3  UL US
- 5  CSV
- 7  Y
- 13  KEMA KEUR
- 13a  KEMA EMC
- 14  VDE  
14a applied
- 15  VDE
- 17  S
- 19  PC
- 25  B
- 28  VDE EMC
- 31  IFAM  S
- 32  SABS
- 33  CQC
- 34  UL US
- 35  ETL RECOGNIZED COMPONENT US

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

# Reference Numbers

Ref. No.	Type	Page	Approval
533866	40656	240	1
533947	UNaH 100/40%.452	44	-
533948	UNaH 150/40%.453	44	-
533949	UNaH 250/40%.454	44	-
533957	34510	78	1
533991	64770	339	-
534016	34110	79	1
534017	34111	79	1
534073	84108	208	1,3
534080	34105	79	1
534081	34106	79	1
534087	97658	329, 339	17
534088	97701	329, 339	-
534089	97692	329	17
534090	97700	339	17
534097	97632	356	17
534107	VNaHJ 35PZTG.053	20	1
534109	VNaHJ 70PZTG.054	20	1
534111	VNaHJ 70PZTG.067	20	-
534115	VNaHJ 150PZTG.055	20	1
534117	VNaHJ 150PZTG.068	20	-
534122	VNaHJ 35PZTG.041	20	-
534128	UNaH 70/40%.501	44	-
534220	34511	78	1
534252	LN 58.722	170, 175	1
534487	NaHJ 1000.089	35	1
534490	LN 24/26.804	169	1
534540	NaHJ 150.620	27	1
534621	L 18.934	169, 174	-
534624	L18.933	171, 175	-
534627	L 18.936	170, 175	-
534644	09900	203	1
534689	98013	353	-
534832	62063	344	1
534833	62063	344	1
534948	41530	238	1
534954	41570	238	1
534979	34120	79	1
535032	31705	315	1
535034	31755	315	1
535131	02113	234	1
535142	NaHJ 400.743	33	1
535146	30800	305	1
535191	NaHJ 70.128	28	1
535216	NaHJ 150.620	28	1
535247	97742	344, 352	-
535263	30800	305	1
535267	95300	305	-
535333	UNaH 150/40%.142	44	-
535347	UNaH 100/40%.522	44	-
535348	UNaH 70/40%.525	44	-
535357	91522	328	-
535474	97734	238	17
535610	33890	313	1,34
535657	VNaHJ 70PZTG.566	19	1
535673	64900	351	-
535674	64940	351	-
535684	62061	344	1
535685	62061	344	1
535694	80010	344, 352	-
535695	VNaHJ 150PZTG.567	19	1
535750	42200	81	1
535751	42210	81	1
535755	42222	81	1
535778	LN 2x18.135	170, 175	1
535977	L 36.132	169, 174	14
535988	30485	305	1
536140	NaHJ 1000.089	35	1
536142	NaHJ 400.743	33	1
536143	NaHJ 400.743	33	1

Ref. No.	Type	Page	Approval
536144	NaHJ 400.744	33	-
536145	NaHJ 400.743	33	1
536146	NaHJ 400.743	33	1
536147	NaHJ 250.741	33	1
536148	NaHJ 250.741	33	1
536149	NaHJ 250.741	33	1
536150	NaHJ 250.742	33	-
536151	NaHJ 250.741	33	1
536152	NaHJ 250.741	33	1
536164	97765	316	-
536199	VNaHJ 35PZTG.568	19	1
536200	VNaHJ 100PZTG.571	19	-
536201	VNaHJ 35PZTG.568	19	1
536202	VNaHJ 70PZTG.566	19	1
536203	VNaHJ 100PZTG.571	19	-
536204	VNaHJ 150PZTG.567	19	1
536205	VNaHJ 35PZTG.574	19	-
536207	VNaHJ 70PZTG.575	19	-
536209	VNaHJ 150PZTG.576	19	-
536220	12612	75	1
536258	Q 400.801	40	1
536259	Q 400.801	40	1
536260	Q 250.800	40	1
536261	Q 250.800	40	1
536378	Capacitor	275	1
536379	Capacitor	275	1
536380	Capacitor	275	1
536381	Capacitor	275	1
536382	Capacitor	275	1
536383	Capacitor	275	1
536384	Capacitor	275	1
536385	Capacitor	275	1
536386	Capacitor	275	1
536387	Capacitor	275	1
536388	Capacitor	275	1
536389	Capacitor	275	1
536390	Capacitor	275	1
536391	Capacitor	275	1
536392	Capacitor	275	1
536393	Capacitor	275	1
536394	Capacitor	275	1
536395	Capacitor	275	1
536396	Capacitor	275	1
536397	Capacitor	275	1
536398	Capacitor	275	1
536399	Capacitor	275	1
536400	Capacitor	275	1
536401	Capacitor	275	1
536402	Capacitor	275	1
536403	Capacitor	275	1
536404	Capacitor	275	1
536405	Capacitor	275	1
536406	Capacitor	276	-
536428	34150	79	1
536429	34151	79	1
536445	97735	344, 352	-
536446	97735	344, 352	-
536451	62062	344	1
536452	62062	344	1
536469	31500	80	1
536582	NaHJ 70.128	29	1
536593	NaHJ 150.620	29	1
536741	Capacitor	277	1
536742	Capacitor	277	1
536743	Capacitor	277	1
536813	Capacitor	277	1
537079	81100	333	-
537080	81100	333	-
537087	83141	333	1
537088	83141	333	1

1	
	ENEC applied
2	
3	
5	
7	
13	
13a	
14	
	VDE applied
15	
17	
19	
25	
28	
31	
32	
33	
34	
35	



# Reference Numbers

Ref. No.	Type	Page	Approval
537103	Q 1000.097	41	1,9
537132	24100	213	1,3
537135	24110	213	1,3
537138	24120	213	1,3
537144	24150	213	1,3
537147	24160	213	1,3
537150	24170	213	1,3
537153	24350	214	1,3
537155	24360	214	1,3
537157	23350	214	1,3
537160	23360	214	1,3
537165	49100	218	1,3
537166	49105	218	1,3
537167	49106	218	1,3
537173	49500	218	1,3
537174	49505	218	1,3
537175	49506	218	1,3
537181	59100	218	1,3
537182	59105	219	1,3
537183	59106	219	1,3
537205	59500	218	1,3
537206	59505	219	1,3
537207	59506	219	1,3
537403	Str 50/12.109	297	-
537484	41600	242	1
537628	94448	355	-
537703	Q 400.801	40	1
537726	NaHJ 250.741	33	1
537744	L 15.007	175	-
537750	L 30.006	175	-
537763	NaHJ 150.620	29	1
537793	NaHJ 150.679	27	-
537869	Q 400.715	40	-
537873	Q 400.732	40	-
538034	Q 400.801	40	1
538072	L 361.342	174	1
538089	09700	356	-
538189	NaHJ 70.128	30	1
538204	NaHJ 400.743	33	1
538258	NaHJ 35.485	30	1
538262	NaHJ 150.620	30	1
538264	NaHJ 150.620	30	1
538361	NaHJ 70/50.520	28	1
538407	NaHJ 70.128	26	1
538537	NaHJ 70.653	30	-
538540	Q 1000.096	41	1
538543	NaHJ 150.620	28	1
538592	UNaH 400/40%.892	47	-
538620	NaHJ 400.744	33	-
538675	PKNaHJ 70.128	24	-
538676	PKNaHJ 100.941	24	-
538677	PKNaHJ 150.620	24	-
538678	PKNaHJ 250.741	25	-
538679	PKNaHJ 400.743	25	-
538680	PKNaHJ 70.653	24	-
538681	PKNaHJ 100.271	24	-
538682	PKNaHJ 150.679	24	-
538683	PKNaHJ 250.742	25	-
538684	PKNaHJ 400.744	25	-
538685	PKNaHJ 70.128	24	-
538686	PKNaHJ 100.941	24	-
538687	PKNaHJ 150.620	24	-
538688	PKNaHJ 250.741	25	-
538689	PKNaHJ 400.743	25	-
538690	PRKUNaH 70/40%.525	42	-
538691	PRKUNaH 100/40%.522	42	-
538692	PRKUNaH 150/40%.142	42	-
538693	PRKUNaH 250/40%.936	43	-
538694	PRKUNaH 400/40%.906	43	-
538695	PRKUNaH 70/40%.525	42	-

Ref. No.	Type	Page	Approval
538696	PRKUNaH 100/40%.522	42	-
538697	PRKUNaH 150/40%.142	42	-
538698	PRKUNaH 250/40%.936	43	-
538699	PRKUNaH 400/40%.906	43	-
538700	PRKUNaH 70/40%.525	42	-
538701	PRKUNaH 100/40%.522	42	-
538702	PRKUNaH 150/40%.142	42	-
538703	PRKUNaH 250/40%.983	43	-
538704	PRKUNaH 400/40%.937	43	-
538705	PRKUNaH 70/40%.525	42	-
538706	PRKUNaH 100/40%.522	42	-
538707	PRKUNaH 150/40%.142	42	-
538708	PRKUNaH 250/40%.983	43	-
538709	PRKUNaH 400/40%.937	43	-
538710	UNaH 400/40%.906	47	1
538711	UNaH 250/40%.936	47	1
538715	UNaH 400/40%.937	47	-
538801	L 18.249	171, 175	14
538807	NaHJ 35.485	30	1
538810	NaHJ 70.128	30	1
538823	NaHJ 70.128	30	1
538828	NaHJ 70.653	30	-
538830	NaHJ 70.128	29	1
538831	NaHJ 150.620	29	1
538834	NaHJ 150.620	30	1
538843	NaHJ 150.625	30	1
539050	UNaH 150/100.722	45	1
539081	NaHJ 100.581	30	1
539128	23370	214	1,3
539209	NaHJ 400.743	33	1
539212	NaHJ 1000.089	35	1
539223	NaHJ 70.128	30	1
539270	NaHJ 150.355	29	1,19,31
539274	NaHJ 250.741	33	1
539283	UNaH 250/40%.746	47	-
539286	NaHJ 150.620	30	1
539306	NaHJ 150.620	30	1
539311	NaHJ 150.679	30	-
539328	PRKUNaH 70/40%.525	42	-
539329	PRKUNaH 70/40%.525	42	-
539330	PRKUNaH 100/40%.522	42	-
539331	PRKUNaH 100/40%.522	42	-
539332	PRKUNaH 150/40%.142	42	-
539333	PRKUNaH 150/40%.142	42	-
539334	PRKUNaH 250/40%.936	43	-
539335	PRKUNaH 400/40%.906	43	-
539336	PRKUNaH 250/40%.936	43	-
539337	PRKUNaH 400/40%.906	43	-
539384	UNaH 600/40%.060	47	-
539434	NaHJ 70.128	26	1
539492	NaHJ 100.941	28	1
539497	34520	78	1
539515	NaH 50/35.797	29, 45	1
539517	UNaH 250/40%.747	47	-
539609	NaHZ 50/35.797	31	1
542349	NaHJ 250.340	29	1
542503	41663	242	1
542557	NaHJ 150.679	30	-
542983	28740	211	1
542984	28741	211	1
543048	85011	320	-
543049	85012	320	-
543053	85013	320	-
543054	85012	320	-
543058	85015	320	-
543059	85016	320	-
543267	31530	80	1
543295	PKNaHJ 100.345	24	-
543299	PKNaHJ 150.301	24	-
543303	62370	74, 344	1



















1	
1a	ENEC applied
2	
3	
5	
7	
13	
13a	
14	
14a	VDE applied
15	
17	
19	
25	
28	
31	
32	
33	
34	
35	



















1
2
3
4
5
6
7
8
9
10

# Reference Numbers

Ref. No.	Type	Page	Approval
543304	62070	74, 343	1
543349	NaHJ 100.941	29	1
543378	PKNaH 50PZT.992	24	-
543384	PRKUNaH 70/40%.525	42	-
543385	PRKUNaH 150/40%.142	42	-
543386	PRKUNaH 250/40%.936	43	-
543388	PRKUNaH 100/40%.522	42	-
543389	PRKUNaH 400/40%.906	43	-
543401	PKNaHJ 35.008	24	-
543414	62415	74, 343	1
543530	32210	303, 306, 309	1
543615	97765	316	-
543640	09701	357	-
543641	09701	357	-
543643	42242	81	1
543733	VNaH 50PZTG.058	20	-
543737	NaHJ 35.209	28	1
543738	NaH 50.206	28	1
543739	NaHJ 100.213	28	1
543740	NaHJ 150.216	33	1
543741	NaHJ 70.226	28	1
543742	PRKUNaH 70/40%.525	42	-
543743	PRKUNaH 100/40%.522	42	-
543744	PRKUNaH 150/40%.142	42	-
543745	PRKUNaH 250/40%.936	43	-
543746	PRKUNaH 400/40%.906	43	-
543747	UNaH 250/40%.936	47	1
543748	UNaH 400/40%.906	47	1
543770	40560	240	1
543771	40561	240	1
543772	40562	240	1
543773	40563	240	1
543777	40566	240	1
543778	40567	240	1
543781	40570	240	1
543782	40571	240	1
543783	40572	240	1
543784	40573	240	1
543787	40576	240	1
543788	40577	240	1
543793	40660	239	1
543794	40661	239	1
543795	40662	239	1
543796	40663	239	1
543800	40666	239	1
543801	40667	239	1
543802	40670	239	7
543803	40671	239	7
543805	40672	239	7
543806	40673	239	7
543809	40676	239	7
543810	40677	239	7
543986	NaHJ 400.743	33	1
544000	41600	242	1
544011	41672	242	1
544210	NaHJ 250.741	33	1
544605	62009	73, 343	1
544621	64800	351	-
544728	UNaH 70/40%.525	45	-
544729	UNaH 150/40%.142	45	-
544730	UNaH 100/40%.522	45	-
544760	PRKUNaH 50/40%.021	42	-
544787	NaHJ 1000.089	35	1
544895	34700	78	1a
544896	34720	78	1a
545261	22860	217	1
545262	22861	217	1
545405	LN 26.238	170	1
545894	09446	205	1,3
545896	09447		1,3

Ref. No.	Type	Page	Approval
545933	09432	204	1,3
545935	09433	204	1,3
545937	09434	204	1,3
545939	09435	204	1,3
546004	83013	340	1,3,3
546006	97745	328	-
546161	34730	78	1a
546254	98008	208, 227	-
546454	64370	324	1,3,3
546456	64370	324	1,3,3
546585	PRKUNaH 250/40%.758	43	-
546609	36020	193	1
546612	36021	193	1
546641	27700 R	210	1,3
546642	27701 R	210	1,3
546647	27800 R	210	1,3
546648	27801 R	210	1,3
546655	58100	209	1,3
546656	58110	209	1,3
546797	PKNaHJ 35.008	24	-
546817	NaHJ 70.158	29	-
547145	LN 21.293	170	-
547285	PKNaHJ 35.008	24	-
547287	PKNaHJ 70.653	24	-
547807	34650	77	1,3,4
547808	34651	77	1,3,4
548259	NaHJ 400.743	33	1
548260	NaHJ 150.159	30	1,19
549999	31500	80	1
550375	83142		1
551271	26300	211	1a,3
551272	26310	211	1a,3
552774	Capacitor	277	1
553806	NaHZ 50/35.797	32	-
554270	JD 2000.81	36	-
554283	JD 2000.83	36	-
554303	J 2000.71	36	-
554304	J 2000.72	36	-
554305	J 2000.73	36	-
554306	JD 2000.82	36	-
554307	JD 2000I.91	36	-
554308	JD 2000I.92	36	-
554309	JD 2000I.85	36	-
554310	JD 2000I.86	36	-
554311	J 1200.95	36	-
554312	J 2500.96	36	-
554313	VNaHJ 1000.75	23	-
554313	VNaHJ 1000.75	23	-
554314	VJ 2000.76	23	-
554314	VJ 2000.76	23	-
554315	VJD 2000.77	23	-
554315	VJD 2000.77	23	-
554316	VJD 2000I.78	23	-
554316	VJD 2000I.78	23	-
554325	STr 200/12.40	298	-
554326	STr 300/12.41	298	-
554542	33650	77	1
554543	33671	77	1
554662	31760	316	1
554904	VNaHJ 1000.75	23	-
554905	VJ 2000.76	23	-
554906	VJD 2000.77	23	-
554909	VJD 2000I.78	23	-

- 1  ENEC  
1a applied
- 2  15 D
- 3  UL US
- 5  CSV
- 7 
- 13 
- 13a 
- 14  VDE  
14a applied
- 15 
- 17 
- 19 
- 25 
- 28  VDE  
EMC
- 31  IFAM
- 32  SABS
- 33  CQC
- 34  UL US
- 35  ETL RECOGNIZED  
COMPONENT  
US

1	
	ENEC 1a applied
2	
3	
5	
7	
13	
13a	
14	
	VDE 14a applied
15	
17	
19	
25	
28	
31	
32	
33	
34	
35	

1
2
3
4
5
6
7
8
9
10



Subsidiaries	Address	Phone / Fax / Email
<b>Vossloh-Schwabe Deutschland GmbH</b> Germany, Benelux, Great Britain, Ireland, Austria, Switzerland, Scandinavia, Turkey	P.O. Box 28 69 D-58478 Lüdenscheid, Germany	Phone: +49/(0)2351/10 10 Fax: +49/(0)2351/10 12 17 info.vsv@vsv.vossloh-schwabe.com
<b>Australia</b> Vossloh-Schwabe Deutschland GmbH	Branch Office Sydney 3A Lenton Place North Rocks, N.S.W. 2151, Australia	Phone: +61/(0)2/88 43 07 00 Fax: +61/(0)2/88 43 07 77 sales-aus@vsaus.vossloh-schwabe.com
<b>China</b> Vossloh-Schwabe Electrical Appliances Trading (Shanghai) Co., Ltd.	Wiselogic International Center Room 2603, #66 North Shannxi Road Shanghai, P.C. 200041/China	Phone: +86/21/62 18 55 99 Fax: +86/21/62 67 07 81 sean.yang@vscn.vossloh-schwabe.com
<b>Czech Republic, Slovakia</b> Vossloh-Schwabe Deutschland GmbH	Sales Office East Europe Na Radositi 184 155 21 Prague 5 - Zlicin, Czech Republic	Phone: +420/235 30 03 58 Fax: +420/235 31 22 61 magdalena.ragauerova@vsv.vossloh-schwabe.com
<b>France</b> Vossloh-Schwabe France S.a.r.l.	ZI-Nord 20, rue A. Kiener 68016 Colmar, France	Phone: +33/(0)389/20 12 12 Fax: +33/(0)389/24 18 65 vsf.ventes@vsf.vossloh-schwabe.com
<b>Hong Kong</b> Vossloh-Schwabe Hong Kong Ltd.	Flat A & B, 26/F., West Gate Tower 7 Wing Hong Street, Cheung Sha Wan Kowloon, Hong Kong	Phone: +852/28779688 Fax: +852/28779933 linda.li@vshk.vossloh-schwabe.com
<b>Hungary</b> Vossloh-Schwabe Deutschland GmbH	Priemyselná 5 917 01 Trnava Slovakia	Phone: +421/33/2851153 info.vsvEE@vsv.vossloh-schwabe.com
<b>Italy</b> Vossloh-Schwabe Italia S.p.A.	Via Strada S. Martino 15 47027 Sarsina/Forlì-Cesena, Italy	Phone: +39/0547/9 81 11 Fax: +39/0547/9 82 60 vs-i@vsi.vossloh-schwabe.com
<b>Korea</b> Vossloh-Schwabe Korea	#602 Olympia Center Building 828-10, Yeoksam-Dong, Gangnam-Gu Seoul 135-935, Korea	Phone: +82/2/62 04 87 81/4 Fax: +82/2/62 04 87 85 j.y.maeng@vs.vossloh-schwabe.com
<b>New Zealand</b> Vossloh-Schwabe Deutschland GmbH	Branch Office Auckland Unit 2 / 54 Lady Ruby Drive East Tamaki, Auckland, New Zealand	Phone: +64/(0)9/265 11 10 Fax: +64/(0)9/265 11 20 sales-nz@vsnz.vossloh-schwabe.com
<b>Poland, Baltic States</b> Vossloh-Schwabe Deutschland GmbH	Sales Office Poland ul. Zaporoska 6/5 PL 30-389 Kraków, Poland	Phone: +48/(0)12/3 57 23 23 Fax: +48/(0)12/2 62 03 26 lukasz.niemczycki@vsv.vossloh-schwabe.com
<b>Serbia, Albania, Bosnia-Herzegovina, Bulgaria, Croatia, Greece, Kosovo, Macedonia, Montenegro, Slovenia, Cyprus</b> Vossloh-Schwabe Deutschland GmbH	Sales Office Belgrad/Serbia Danila Lekica 1 11000 Belgrade, Serbia	Phone: +381/63/286 330 Fax: +381/63/286 330 goran.stankovic@vsv.vossloh-schwabe.com
<b>Singapore</b> Vossloh-Schwabe Pte. Ltd.	Vertex, 33 Ubi Avenue 3 Lobby A #06-72 Singapur 408868	Phone: +65/62 75 75 33 Fax: +65/62 75 76 33 vssing@singnet.com.sg
<b>South Africa</b> Vossloh-Schwabe Deutschland GmbH	Branch Office Johannesburg 154, Lechwe Avenue, Corporate Park Midrand 1685, South Africa	Phone: +27/11/31 44 340 Fax: +27/11/31 45 287 barry.hall@vsaf.vossloh-schwabe.com
<b>Spain, South America, Portugal</b> Vossloh-Schwabe Ibérica, S.L.	Venezuela 105, 5ª - A 08019 Barcelona, Spain	Phone: +34/93/481 70 70 Fax: +34/93/481 70 71 vs-e@vse.vossloh-schwabe.com
<b>Taiwan</b> Vossloh-Schwabe Pte. Ltd.	Taiwan Branch 9, Fl-2, No. 80 Sung Chiang Road, Taipei, Taiwan	Phone: +886/(0)2/25 68 36 22 Fax: +886/(0)2/25 68 36 20 betty.ha@vstw.vossloh-schwabe.com
<b>Thailand</b> Vossloh-Schwabe Trading Ltd.	3rd Floor (Unit 1) BUI Building 1 175-177 Soi Anumarnratchathon 1 Surawong Road, Kwaeng Suriyawongse Khet Bangrak, Bangkok 10500, Thailand	Phone: +66/(0)2/63 473 11 Fax: +66/(0)2/63 473 13 sales.vst@vstt.vossloh-schwabe.com
<b>Tunisia</b> Vossloh-Schwabe Tunisie S.A.	Rue de l'énergie, BP. 299 Zone Industrielle de Ben Arous 2013 Tunis, Tunisia	Phone: +216/1/38 49 00 Fax: +216/71/38 49 90 vs.tunisie@gnet.tn
<b>USA, Canada, Mexico</b> Universal™ Lighting Technologies	26 Century Blvd. Nashville, TN 37214-3683, USA	Phone: +1/615/316-5100 Fax: +1/615/316-5205 oem_sales@unvlt.com

Distributors	Address	Phone / Fax / Email
<b>Belgium</b> Huppertz NV-SA	Golden Hope Straat 35b 1620 Drogenbos, Belgium	Phone: +32/2/344 34 34 Fax: +32/2/344 34 30 info@huppertz.be
<b>Bulgaria</b> HIT Ltd.	Vasil Levski Street, No 20 5139 Parvomaitsi, Bulgaria	Phone: +359/(0)618/64 909 Fax: +359/(0)618/64 929 m.zelenkov@hitlighting.com
<b>Denmark</b> Scanlouvers A/S	Syv Holmevej 3 4130 Viby Sj., Denmark	Phone: +45/4618/66 44 Fax: +45/4618/67 12 sales@scanlouvers.dk
<b>Egypt</b> Egyptian German Electrical Supplies Comp.	55, Al Gomhoria St. Azbakia, Cairo, Egypt	Phone: +202/2/58 800 22 Fax: +202/2/59 141 88
<b>Germany</b> Arnold Houben GmbH Distributor für den Elektro-Großhandel	An der Wachsfabrik 3a 50996 Cologne, Germany	Phone: +49/(0)2236/966 310 Fax: +49/(0)2236/966 319 info@houben.eu
<b>Finland</b> Artisan Rinaldo AB Ltd.	Timmermalmintie 21 A 01680 Vantaa, Finland	Phone: +358 (0)98553210 Fax: +358 (0)98533183 rinaldo@artisan-rinaldo.fi
<b>Iran</b> Sepehr Afroz Saba Trading, Inc.	141 Amol Road Babol, Iran	Phone: +98/111/328 39 11 Fax: +98/111/328 39 24 info@sasti.net
<b>Jordan</b> Hassan Minwer Est. Jabal Al-Hussein	Salah Ad-deen Str. 164, 182 P.O. Box 182651 11118 Amman, Jordan	Phone: +962/6/46 46 666 Fax: +962/6/46 43 746 minwerlight@index.com.jo
<b>Netherlands</b> Hemmink BV	Amperestraat 24-28 8013 PV Zwolle Netherlands	Phone: +31/(0)38 46 98 200 Fax: +31/(0)38 46 98 299 info@hemmink.nl
<b>Norway</b> Lyskomponenter AS	Sagmyra 2 A 4624 KristiansandBal, Norway	Phone: +47/38/003636 Fax: +47/23/501283 firmapost@lyskomponenter.no
<b>Portugal</b> Vabeldi-Comercio de Iluminação, Lda.	Empreendimento Urbiportal, Armazém 3 Zona Industrial da Abrunheira 2710-089 Sintra, Portugal	Phone: +351/21/91 511 75 Fax: +351/21/91 520 63 vabeldi@vabeldi.pt
<b>Romania</b> Patrascoiu Consulting SRL	Budila str., 12, ap. 4B4, Sector 2 024095 Bucharest, Romania	Mobile: +40/744278096 Phone/Fax: +40/21/6107437 silviu.patrascoiu@patrascoiu-consulting.ro
<b>Russia</b> Terna-Lainer	87, Dmitrovskoje Shosse 127238 Moscow, Russia	Phone: +7/(0)495/77 50 100 Fax: +7/(0)495/50 298 76 svet@zaolainer.ru
<b>Saudi Arabia</b> Ultra Light	P.O. Box 42005 11541 Riyadh, Saudi Arabia	Phone: +966/1/29 17 855 Fax: +966/1/29 13 597 ultralight@ultra-light.net
<b>Sweden</b> Candelux AB	Hamragårdsvägen 37 43951 Åsa, Sweden	Phone: +46/(0)31/70 600 70 Fax: +46/(0)31/70 600 72 info@candelux.se
<b>Switzerland, Liechtenstein</b> Max Hauri AG	Weidstrasse 16 9220 Bischofszell, Switzerland	Phone: +41/71/42 42 525 Fax: +41/71/42 42 590 info@maxhauri.ch
<b>United Arab Emirates</b> VS-Gulf FZCO	P.O. Box 17590 Jebel Ali Free Zone, Dubai, U.A.E.	Phone: +971/4/88 12 599 Fax: +971/4/88 12 170 sales@vsgulf.com

1

2

3

4

5

6

7

8

9

10

Whenever an electric light goes on around the world, Vossloh-Schwabe is likely to have made a key contribution to ensuring that everything works at the flick of a switch.

Headquartered in Germany, Vossloh-Schwabe has been a member of the global Panasonic group since 2002 and counts as a technology leader within the lighting sector. Top-quality, high-performance products form the basis of the company's success.

Whether cost-effective standard components or tailor-made product developments are needed, Vossloh-Schwabe can satisfy even the most diverse market and customer requirements. Vossloh-Schwabe's extensive product portfolio covers all lighting components: LED systems with matching control gear units, OLEDs and state-of-the-art control systems (LiCS) as well as electronic and magnetic ballasts and lampholders.



A member of the Panasonic group **Panasonic**

**Vossloh-Schwabe Deutschland GmbH**

Hohe Steinert 8 · 58509 Lüdenscheid · Germany  
Phone +49/23 51/10 10 · Fax +49/23 51/10 12 17

[www.vossloh-schwabe.com](http://www.vossloh-schwabe.com)

**VS LIGHTING SOLUTIONS**

All rights reserved © Vossloh-Schwabe  
Photos: istockphoto.com; shutterstock.com  
Specifications are subject to change without notice  
VS Component Systems Standard EN 2014