


diff. lum. with opal diffuser

Square LED surface-mount luminaire with IP54 with opal diffuser. Luminaire input power: 18.4 W, DALI controllable luminaire with LED converter. LED service life lasts 50000 h before luminous flux is reduced to 90% of the initial value. Chromaticity tolerance (initial MacAdam): 3. Luminaire luminous flux: 2140 lm, Luminaire efficacy: 116 lm/W. Colour rendering Ra > 80, colour temperature 3000 K. Despite maximum quality control, recognisable colour differences between luminaires with the predefined tight binning may occur with cluster applications. To achieve a uniform appearance despite this, we recommend consulting a lighting consultant with intended cluster installations. Integrated ESD protection of the LED module. Housing made of plastic, white, with injection-moulded diffuser made of opal polymethylmethacrylate with Impact strength: IK03. Edges sealed by high-quality foamed, water-repellent polyurethane seal; special cable guide for IP54; installed using slotted washers supplied with product. Approved ambient temperature: -20°C to +25°C. Luminaire wired with halogen-free leads. Please note: please talk to your adviser if you are planning to use the luminaire in environments containing chemical pollutants or with outdoor use. Dimensions: 310 x 310 x 90 mm; weight: 1.9 kg.




ZS_PER_F_opal-quadra_TCL.jpg

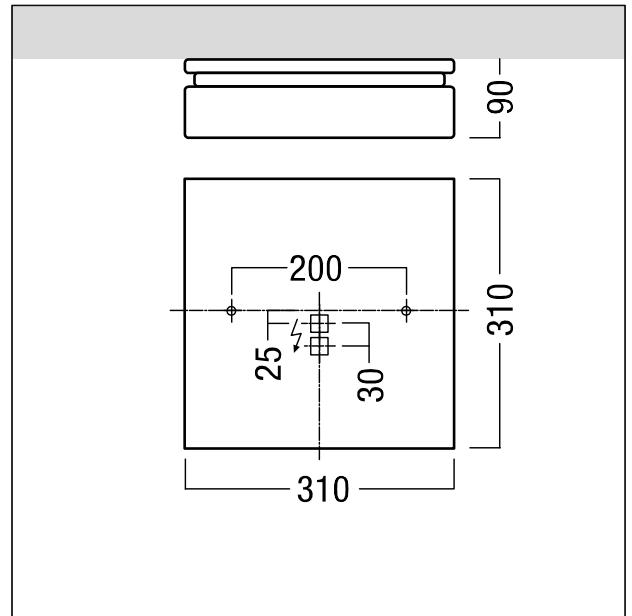

ZS_PER_M_Perluce-LED.wmf

Light Distribution

STD - standard

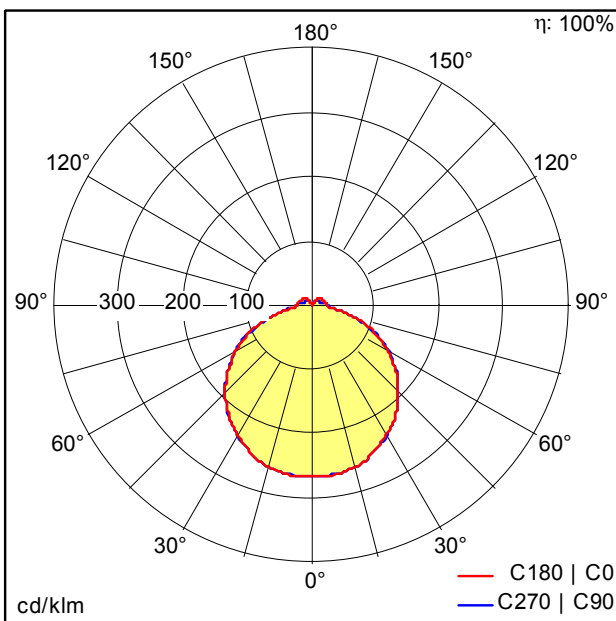

D32413AA_PERLUCE_O_LED2200-830_Q310_LDE.idt

- Light Source: LED
- Luminaire luminous flux*: 2140 lm
- Luminaire efficacy*: 116 lm/W
- Colour Rendering Index min.: 80
- Ballast: 1 x 28000664 LCA 17W 250-700mA one4all C PRE
- Correlated colour temperature: 3000 Kelvin
- Chromaticity tolerance (initial MacAdam): 3
- Rated median useful life*: L90 50000h at 25°C
- Luminaire input power*: 18.4 W Power factor = 0.98
- Standby Power*: 0.2 W
- Dimming: LDE dimmable to 1% over DALI, DSI and switchDIM DC level is adjustable
- Maintenance category: E - Dust-proof IP5X

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

The level of luminous flux reduces over the life cycle due to technological reasons. The failure of up to 1 LED points causes no functional impairment and is therefore no reason for complaint.

