


Wall mounted luminaire, Downlight

Half-round cone shaped IP65 Wall mounted luminaire, Downlight for outdoor applications with black aluminium die cast housing. Colour Temperature 3000K (warm-white) with colour rendering index Ra80, LED service life: 50000 h before luminous flux is reduced to 80 % of the initial value. Luminaire input power: 5 W, 300 Lumen @ 60lm/W; IK04; IP65; 230V. Quick connection terminal for wires up to 2.5mm<sup>2</sup> for fast installation. Dimensions: 94 x 160 x 58 mm, weight: 0.52 kg




TE\_HOLLY\_F\_ROUND\_UPDOWN\_persp.jpg

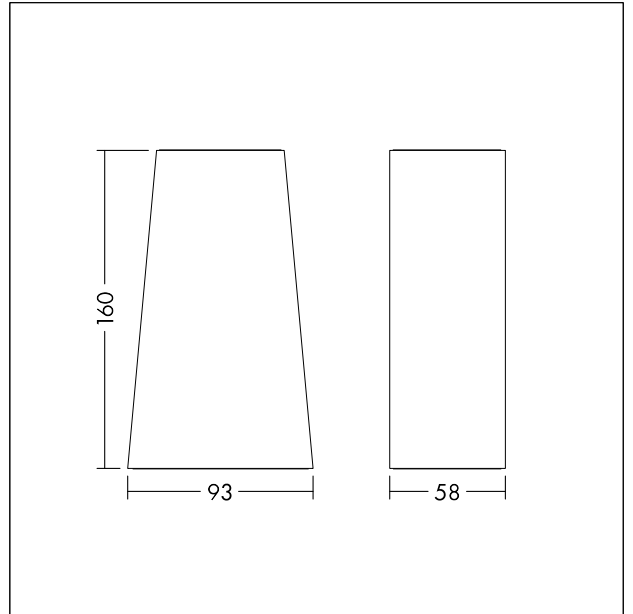

TE\_HOLLY\_M\_ROUND.wmf

Light Distribution

STD - standard

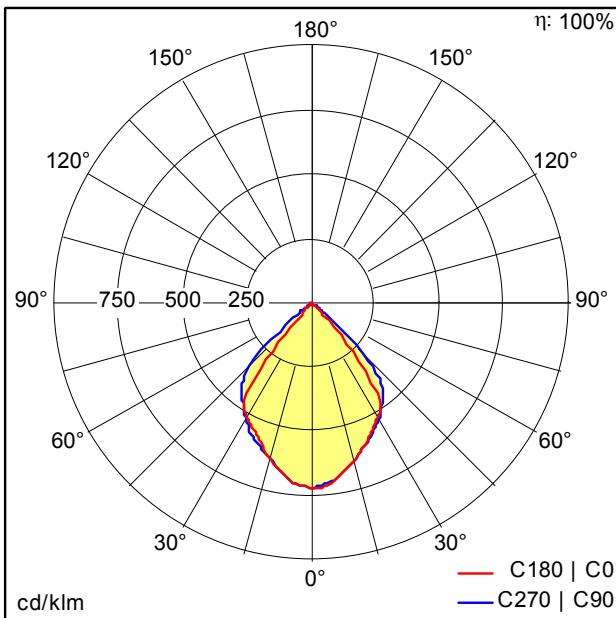

TE\_HOLLY\_CONE\_DOWN\_IP65\_300\_830.idt

- Light Source: LED
- Luminaire luminous flux\*: 301 lm
- Luminaire efficacy\*: 60 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature: 3000 Kelvin
- Chromaticity tolerance (initial MacAdam): 6
- Rated median useful life\*: L80 50000h at 25°C
- Ballast: 1x LED\_Con
- Luminaire input power\*: 5 W Power factor = 0.5
- Dimming: Fixed output

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.