



# MASTER LEDspot ExpertColor AR111



## MAS LEDExpertColor 20-100W 930 AR111 45D

MASTER LEDspot LV ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. It creates such an ambience with superior lighting that has a customized spectrum, high CRI, and deep dimming feature. The result? A beautiful lighting experience. What's more, the innovative, trimless lens design will suit almost any interior decor with its clean and neat look. In addition, you can take advantage of the full ExpertColor family, which also includes LEDspot MV and LEDspot Par lamps.

### **Product data**

General Information	
Cap-Base	G53
Nominal lifetime	40,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
EU RoHS compliant	Yes
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	45 degree(s)
Luminous Flux	1,270 lm
Luminous Intensity (Nom)	2,200 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	63 lm/W
Color Consistency	<4
Color rendering index (CRI)	95

LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	1,270 lm
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	1.5
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	20 W
Lamp Current (Nom)	2,000 mA
Wattage Equivalent	100 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	12 V


Datasheet, 2024, February 19 data subject to change

# **MASTER LEDspot ExpertColor AR111**

Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	77 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	AR111
Approval and Application	
Energy Efficiency Class	G
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	20 kWh
EPREL Registration Number	1122532


EyeComfort	Yes
Product Data	
Order product name	MAS LEDExpertColor 20-100W 930
	AR111 45D
Full product name	MAS LEDExpertColor 20-100W 930
	AR111 45D
Full product code	871951442971000
Order code	929003479002
Material Nr. (12NC)	929003479002
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514429710
Numerator - Packs per outer box	6
EAN/UPC - Case	8719514429727

## Dimensional drawing




Product	D	С
MAS LEDExpertColor 20-100W 930 AR111 45D	111 mm	62 mm

## Photometric data








Accent Lighting Spots - MAS LEDExpertColor 20-100W 930 AR111 45D


## **MASTER LEDspot ExpertColor AR111**


#### Photometric data

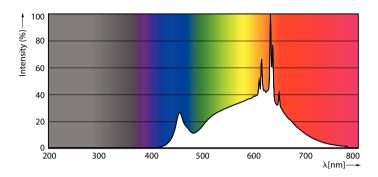

Spectral Power Distribution Colour - MAS LEDExpertColor 20-100W 930 AR111 45D

#### Lifetime

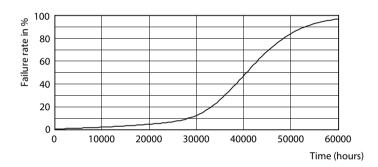



Life Expectancy Diagram - MAS LEDExpertColor 20-100W 930 AR111 45D

Lumen Maintenance Diagram - MAS LEDExpertColor 20-100W 930 AR111



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.