


PRODUCT DATASHEET

P DIM LINE 118.00 mm 125 16 W/2700 K R7s

PARATHOM® DIM LINE R7s | Dimmable double-ended special LED lamps

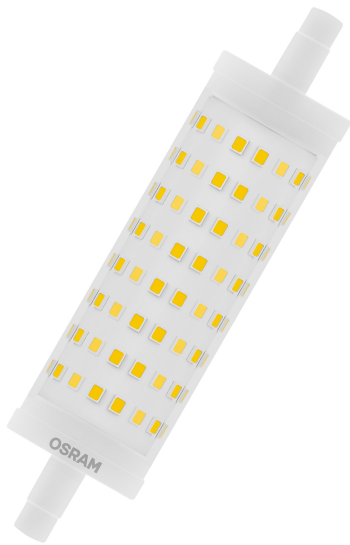

Areas of application

- General illumination within ambient temperatures from -20...+40 °C
- Hospitality
- Domestic applications
- Outdoor applications only in suitable luminaires

Product benefits

- Fits into most R7s luminaires thanks to excentric base
- Good all-around light emission
- Lower thermal output (compared with the standard reference product)
- Five year guarantee

Product features

- Dimmable (with many common dimmers, see also www.ledvance.com/dim)
- LED alternative to conventional R7s lamps
- Good quality of light; color rendering index $R_a \geq 80$; constant chromaticity




TECHNICAL DATA

Electrical data

Nominal wattage	16 W
Construction wattage	16.00 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	125 W
Nominal current	70 mA
Type of current	AC
Inrush current	4.93 A
Operating frequency	50/60 Hz
Mains frequency	50/60 Hz
Max. lamp no. on circuit break. 10 A (B)	15
Max. lamp no. on circuit break. 16 A (B)	24
Total harmonic distortion	< 120 %
Power factor λ	≥ 0.90

Photometrical data

Luminous flux	2000 lm
Nominal useful luminous flux 90°	2000 lm
Luminous efficacy	125 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	≥ 80
Light color	827
Standard deviation of color matching	≤ 6 sdc _m
Rated LLMF at 6,000 h	0.80
Flickering metric (Pst LM)	1.0
Stroboscope effect metric (SVM)	0.4

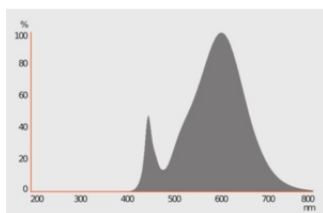

Light technical data

Beam angle	300 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Rated beam angle (half peak value)	300.00 °

Dimensions & Weight

Overall length	118.00 mm
Diameter	28.00 mm
Maximum diameter	28 mm
Product weight	95.00 g

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	87 °C

Lifespan

Nominal lamp life time	25000 h
Number of switching cycles	100000
Lumen maintenance at end of serv	0.70
Rated lamp survival factor at 6,000	≥ 0.90

Additional product data

Base (standard designation)	R7s
Mercury content	0.0 mg
Design / version	Clear

Capabilities

Dimmable	Yes
----------	-----

Certificates & Standards

Energy efficiency class	E 1)
Energy consumption	16.00 kWh/1000h
Type of protection	IP20
Standards	CE / EAC
Photobiological safety group acc. to EN62778	RG1

1) Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

Country-specific categorizations

Order reference	LEDPL118125D 16
-----------------	-----------------

LOGISTICAL DATA

Temperature range at storage	-20...+80 °C
------------------------------	--------------

Energy labelling regulation data acc EU 2019/2015

Lighting technology used	LED
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	R7s
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Correlated colour temperature type	SINGLE_VALUE
Standby power	0.00
Claim of equivalent power	Yes
Length	118.00 mm
Height	28.00 mm

Width	28.00 mm
Chromaticity coordinate x	0.458
Chromaticity coordinate y	0.410
Beam angle	SPHERE_360
Survival factor	0.90
LED light source replaces a fluorescent light source	not applicable
EPREL ID	522891
Model number	AC32138

Safety advice

- To ensure full light efficiency and product lifetime, it is recommended to detach any glass or cover of the luminaire.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075626812	Folding box 1	30 mm x 30 mm x 122 mm	100.00 g	0.11 dm ³
4058075626829	Shipping box 20	159 mm x 129 mm x 131 mm	2054.00 g	2.69 dm ³
4058075626836	Shipping box 120	269 mm x 169 mm x 411 mm	12522.00 g	18.68 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

- For further products and actual information concerning LED lamps see www.ledvance.com/ledlamps
- For Guarantee see www.ledvance.com/guarantee
- For dimming conformity see www.ledvance.com/dim

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.